bazoo

www.bazoo.eu

What is bazoo?

THE BRAND I THE PRODUCT AREAS

All-in-One

Tablet

Notebook

Netbook

Desktop

The IT market is in a state of permanent flux. The convergence between the areas of consumer electronics, telecommunications and information technology can no longer be overlooked. As the driving force of this development, IT is bringing out new primary device classes (e.g. Tablet PC, All-in-One PC) which call for flexible solutions in terms of accessories.

The IT accessories brand bazoo has set itself the goal of addressing the modern and lifestyle-oriented target group with product ideas which supplement the new device classes in the best possible way, and which are moreover clearly differentiated from the competition.

bazoo products are:

- ❍ High-margin — attractive profit margins with pricing that is still in attuned to the market.
- ❍ Prizewinning — prestigious awards generate additional demand
- ❍ Exclusive — innovative technology, own designs, special materials
- ❍ Up-to-date — own trend scouting and European customer feedback
- ❍ Certified — by strong partners (e.g. USB 3.0, Microsoft TiltWheel, Made for iPad)

In this bazoo product area up-to-date technology (USB 3.0, BluetoothTM 3.0 etc.) and clever solutions (e.g. GREEN USB-HUB that can be switched off) come together with fresh designs and selected tuning products.

The focus is on improved performance and convenience in using current primary devices.

Modern Smartphone pouches, innovative mousepads and Notebook skins with fresh motifs support the consumer's wish for individuality.

As well as exclusive designs, specially selected materials (e.g. textiles, surfaces etc.) not only lend the products a high degree of attractiveness but give rise to real USPs (e.g. with mousepads – extremely non-slip but nonetheless completely detachable).

bazoo keyboards and mice not only offer exceptional materials and outstanding design.

Together with the incorporation of innovative technologies, like Multi-touch and BlueSense, they achieve a high degree of attractiveness.

bazoo sound products make use of new technologies (2.2 Subwoofer), make a convincing impression with their exceptional sound quality (Bluetooth Stereo Headset) and can be used in versatile ways (e.g. with a Mac, iPad, PC or Playstation3).

POS – Display & Shop wall

A clear visual segmentation of the assortment makes for high attractiveness in the wall presentation, and moreover has an outstanding effect at a distance. Sales will be supported by integrated displays for core products of the various assortment areas.

1 – 3D-Poster
2 – Demo display
3 – Top display
4 – Magnetic side banners
5 – Scanner bar
6 – Sales display

PACKAGING – Full packaging to blister box

Thanks to the well thought out grid system, the target-group-oriented packaging lends itself to spatially optimised presentation on the shop wall.

In addition, the conspicuous design supports successful placement in the direct competitive environment. The sales displays effortlessly facilitate multiple placements.

1 – Highlighted presentation of the product
2 – Unambiguous visualisation of the brand
3 – Clear colour labelling for assortment areas
4 – Self-explanatory pictograms for product description
5 – Description in up to 18 languages
6 – Conspicuous product highlights

Input Devices – Keyboards

Wireless Keyboards and sets

new **B-KB FM** ctn qty. 10 EDP-No. 27143

bazoo WIRELESS BOARD, Compact Wireless Keyboard

The Bazoo WIRELESS BOARD is equipped with a very compact design and high quality keyboard module. This ensures whisper-quiet and relaxed typing. It is excellently suited for use with an all-in-one PC or as a netbook/notebook keyboard. The transmission frequency of 2.4 GHz ensures a rapid and stable connection, even over long distances.

- High quality keyboard module with scissor keys for comfortable and quiet writing
- 2.4 GHz transmission frequency
- Mini USB receiver
- 5 Hotkeys + bazoo key to control them
- Numerical keypad can be achieved by double assignment of the keyboard
- On/Off switch to save power when not in use
- Basic functions also available under Mac OS 10.x.
- Package: cardboard box

USB Receiver | Wireless Technology | Real Scissor Keys | 5 Hotkeys | Operating Systems | Operating Systems | Operating Systems

new **B-WB MM 2.4** ctn qty. 10 EDP-No. 27146

bazoo WIRELESS SET, 2.4 GHz Keyboard & Optical Mouse

This wireless keyboard/mouse set ensures convenient working without tangled cables.
The transmission frequency of 2.4 GHz enables a rapid and stable wireless connection and a greater range than with conventional 27 MHz technology. The integrated auto-pairing function ensures easy battery changes: a new pairing procedure is not necessary, as all devices are automatically "found" again after replacing the battery or exceeding the range of the USB receiver.

- Wireless keyboard/mouse combination
- USB receiver for simple installation
- 2.4 GHz transmission frequency
- Range up to approx. 5 m
- Keyboard with 18 multimedia/internet keys
- Mouse with 5 buttons and 800 dpi optical sensor
- Auto-pairing function
- Incl. batteries (4x AA)
- For Windows 2000, XP, Vista and Windows 7
- Package: cardboard box

USB Receiver | Wireless Technology | Sensitivity | 18 Hotkeys | Buttons | Operating Systems | Operating Systems

Keyboards

B-KB USB SLIM

ctn qty. 10 EDP-No. 27150 new

bazoo SLIMBOARD, USB Design Keyboard

The bazoo SLIMBOARD provides unique writing comfort thanks to its special key mechanism. This ensures whisper-quiet and relaxed typing.
The extra keys, which are available via the "bazoo key", enable direct access to the most important internet and multimedia functions. The super-flat design is not only an eyecatcher on any desk, but also reduces strain on the hand/wrists for long texts.

- Individual, high quality scissor keys for comfortable and quiet writing
- USB port
- 13 hotkeys + "bazoo key"
-Super-flat design
- Important direct access keys achievable with key combinations
- For Windows 2000, XP, Vista and Windows 7
- For Linux 2.6.x.y. and higher
- Package: cardboard box

B-KB USB IBOARD

ctn qty. 10 EDP-No. 27149

bazoo iBOARD, USB Design Keyboard

The bazoo iBOARD is close to the modern designs of up-to-date computers and gaming consoles.This extra slim keyboard with a special key structure is a real design object on the desktop. Thanks to its built-in USB 2.0 port at the backside if offers the possibility to connect almos any USB device. The bazoo iBOARD works with Windows and MacOS but also with Nintendo's Wii console - here you can use the keyboard and even the USB port, only the multimedia keys are not supported.

- Built-in USB 2.0 port for temporarily used devices
- USB plug for keyboard/USB port (2 sockets needed)
- 16 hotkeys for direct access to Internet/multimedia functions
- Extra slim structure, only 18mm high
- For Windows 2000, XP, Vista und Win7
- For Linux 2.6.x.y.
- For Mac OS 10 and higher. for Linux 2.6.x.y. and higher
- For Nintendo Wii
- Package: cardboard box

Input Devices – Keyboards

Keyboards

B-KB MM USB LIGHT

ctn qty. 10 EDP-No. 28760

bazoo LUMIBOARD, Multimedia Keyboard

SUC-EDP-No. 23239

Multimedia keyboard with blue backlight

- Blue key backlight (can be switched off)
- 9 multimedia and internet hotkeys
- USB connection
- For Windows® 2000, XP, Vista and Win7
- For Linux 2.6.x.y. and higher
- Packaging: cardboard box

USB Connection | Blue Illumination | 9 Hotkeys | Operating Systems | Operating Systems | Operating Systems

new

B-KB USB ST

ctn qty. 10 EDP-No. 27145

bazoo COMPACT BOARD, USB Keyboard

USB keyboard

- Standard USB keyboard
- Modern and flat design
- For Windows 2000, XP, Vista and Win 7
- For Linux 2.6.x.y. and higher
- Packaging: cardboard box

USB Connection | Operating Systems | Operating Systems | Operating Systems

B-KB ST

ctn qty. 20 EDP-No. 28758

bazoo COMPACT KEYBOARD, PS/2 Keyboard

SUC-EDP-No. 11459

- Standard PS/2 keyboard
- 3 Windows® power keys (Sleep, Wake up, and Power down)
- For Microsoft® Windows® 2000, XP, Vista and Win 7
- For Linux 2.6.x.y. and higher
- Package: cardboard box

PS/2 | 16 Hotkeys | Operating Systems | Operating Systems | Operating Systems

Keyboards

B-KB 10-KEY ctn qty. 5 EDP-No. 28761
bazoo 10KEY, external USB Keypad SUC-EDP-No. 22857

The elegant and slim numerical keypad makes it easy to enter numbers on the laptop

- Cable can be fastened to the device to prevent cable entanglement during transportation
- Extra flat keys for a quick number entry
- With NumLock LED
- With treble zero key
- No driver installation required
- For Windows 2000, XP, Vista and Win7
- For MacOS 10 and higher
- For Linux Kernel 2.6.x.y. and higher
- Packaging: blister

Keyboard Sets

B-KB USB IBO SET ctn qty. 10 EDP-No. 27151 new
bazoo iBOARD SET, USB Design Keyboard & Mouse

The new bazoo iBOARD Set consists of the well-known iBOARD, which is orientated to the familiar design elements of modern "in" computers and family games consoles. The extra-flat keyboard with its special key structure is a real eyecatcher on your desk, and thanks to the USB port integrated at the rear, also provides the possibility of connecting temporarily used USB devices.
The mouse includes an 800 dpi optical sensor and optimally matches the keyboard. Thanks to the simple-to-use cable storage in the housing of the mouse, it can easily be used as a notebook mouse when you are on the move. The bazoo iBoard Set supports Windows and MacOS, and on its own, the keyboard can also be used for inputs to Nintendo Wii consoles.

- Integrated USB 2.0 port for temporarily used USB devices
- USB port for keyboard / USB port 2 (2 ports required)
- 16 hotkeys for direct access to internet / multimedia functions
- Extra-flat design, only 18 mm high
- Optical sensor with 800 dpi
- Integrated cable spool with magnetic holder for simple access
- For Windows 2000, XP, Vista and Windows 7, Linux 2.6.x.y. and higher, MacOS 10 and higher
- For Nintendo Wii (keyboard only, mouse entries are generally not supported by the Wii)
- Package: cardboard box

B-KB USB SET BK ctn qty. 10 EDP-No. 28759
bazoo USB DESKTOP SET, USB Keyboard & Optical Mouse SUC-EDP-No. 22547

Attractive entry-level set for all PC users

- Standard keyboard with USB connection and 3 Windows® power keys
- Optical USB mouse with 800 dpi resolution
- Supports Windows® 2000, XP, Vista und Win7
- For Linux 2.6.x.y. and higher
- Package: cardboard box

bazoo

www.bazoo.eu

Input Devices – Mice

Wireless Mice

B-MSFOU 2.4 MER

ctn qty. 5 EDP-No. 27142 new

bazoo MERLIN TC, Wireless Multitouch Mouse

The bazoo MERLIN TC Wireless Multitouch Mouse has an elegant design and a completely novel control concept. The familiar mechanical elements of conventional mice (buttons, scroll wheel) have been replaced by a sensor surface, which detects the movement of one or two fingers and can transform them into control commands. This enables simple and precise scrolling, zooming or turning pages, without having to operate additional mouse buttons.

- Novel sensor control concept without mechanical control elements
- Optical sensor with 1,200 dpi resolution
- 2.4 GHz radio frequency with up to 5 m range
- No driver installation necessary
- For Windows Vista and Windows 7
- For Mac OS 10.x
- Packaging: blister

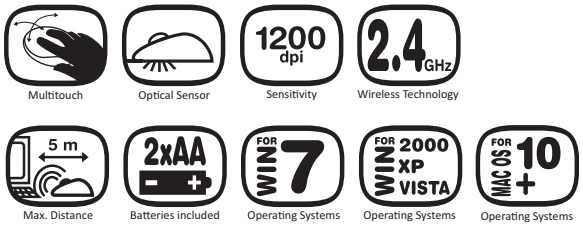

B-MSBU MER PI

ctn qty. 5 EDP-No. 27133 new

bazoo MERLIN BS, Wireless BlueSense Desktop Mouse

The bazoo MERLIN BS Mouse uses the latest BlueSense sensor technology and can therefore be used on a wide range of surfaces. The nano-receiver, which can be stored in the mouse, can optionally remain plugged in to the notebook, as its extra-small size hardly protrudes from the housing. The high quality chrome plating on the sides gives the mouse an elegant and modern design.

- Optical BlueSense sensor
- Sensor sensitivity: 1,000 dpi
- Desktop size (approx. 115 mm long) is also suitable for large hands
- 2.4 GHz radio frequency with up to 8m range
- The USB receiver can remain in the computer/notebook or in the housing of the mouse during transport
- High quality scroll wheel
- 5 buttons
- No driver installation necessary
- Works with MacOS 10.x and Linux 2.6.x.y (standard functions)
- For Windows 2000, XP, Vista and Win 7
- Incl. batteries
- Packaging: blister

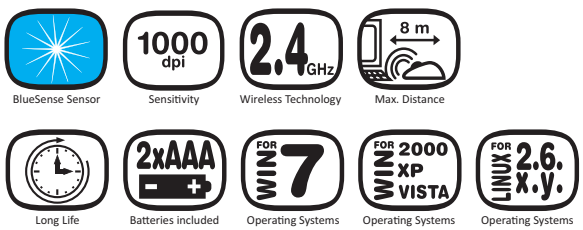

Input Devices – Mice

Wireless Mice

new **B-MSFBU LUG BL** ctn qty. 6 EDP-No. 27140

bazoo LUGUS BS, Wireless BlueSense Notebook Mouse

The new bazoo LUGUS BS Notebook mice are the first bazoo models coming with the new BlueSense sensor technology. Thanks to this new development of Microsoft users can use the mouse on almost any surface. Beside chipset modifications the existing red optical LED was exchanged with a blue high power LED - the shorter wavelength of the blue light results in a better scanning of the (desk-) surface. This makes it possible to use the mouse on difficult surfaces, e.g. white or black desks, shiny and slightly reflecting materials, etc. which makes this mouse an ideal device for travellers.

The wireless version of the LUGUS BS has an attractive metallic-blue and 2,4 GHz frequency.

- Optical BlueSense sensor
- Adjustable sensitivity of the sensor (800 / 1,600 dpi)
- 2,4 GHz frequenzy for 8m distance
- USB receiver take place in the notebook or during transportation it can take place under the mouse
- High quality scroll wheel
- 6 buttons
- No driver installation necessary
- For Windows 2000, XP, Vista, and Windows 7
- Works with MacOS 10.x and Linux 2.6.x.y (standard functions)
- Batteries included
- Packaging: blister

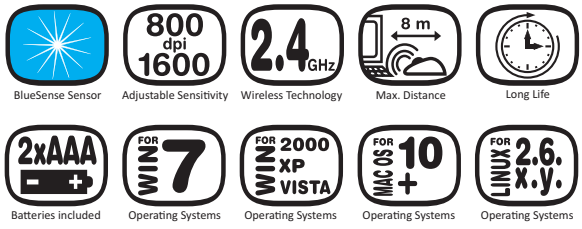

new **B-MSFOU 2.4 MAR** ctn qty. 6 EDP-No. 27125

bazoo MARA FM, Wireless Mouse

The bazoo MARA FM is an optical mouse with wireless transmission for comfortable use without cables. Fast reaction times and a high range thanks to the 2.4 GHz transmission frequency. The small USB receiver can be stored under the mouse during transport. The mouse itself provides an on/off switch so that it can be switched off during transport to save power.

- Optical mouse with mini USB receiver
- Sensor with 800 dpi sensitivity
- 2.4 GHz wireless transmission frequency for stable and fast connection
- Range up to 5m
- Metallic blue top, silver side parts and black bottom
- Three buttons incl. scroll wheel
- Medium size, therefore useable for desktop and notebook computers
- Incl. 2x AA batteries
- For Windows 2000, XP, Vista, Win 7 and für Linux 2.6.x.y. and higher
- Packaging: blister

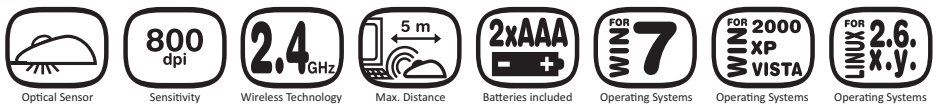

Mice

B-MSBU SHI

ctn qty. 5 EDP-No. 27141 new

bazoo SHIVA BS, USB Gaming Mouse

The bazoo SHIVA Gaming Mouse is the ideal input device for occasional players.
Thanks to the adjustable sensitivity, the mouse can be quickly adapted to any gaming situation.
The BlueSense sensor enables the mouse to be used even in on difficult surfaces.

- Optical BlueSense sensor
- Adjustable sensitivity (400, 800, 1,600 and 2,400 dpi)
- Desktop size (approx. 115 mm long) is also suitable for large hands
- LEDs to indicate the sensitivity
- USB connection
- 6 buttons
- High quality scroll wheel
- Incl. driver CD
- For Windows XP, 2000, Vista and Win 7
- Packaging: blister

NBK MSBU

ctn qty. 5 EDP-No. 26900

BlueSense Notebook Mouse

Convenient notebook mouse with new BlueSense technology.
The BlueSense mouse can be operated on almost any surface and therefore is perfectly suited for mobile use since it does not need a mousepad any longer. It combines the benefits of conventional optical technology (large illumination range, more exact reproduction of surface structure) and laser technology (more precise scanning, better resolution).

- USB port
- 1000 dpi BlueSense sensor
- 3 buttons with scroll wheel
- Blue effect lighting combined with attractive white
- For Windows 2000, XP, Vista and Win 7
- For MacOS 10 and higher, for Linux Kernel 2.6.x.y. and higher
- Packaging: blister (in retail display carton)

Input Devices – Mice

Mice

new **B-MSBU LUG OR** ctn qty. 6 EDP-No. 27136
bazoo LUGUS BS BlueSense Notebook Mouse, orange

new **B-MSBU LUG GR** ctn qty. 6 EDP-No. 27137
bazoo LUGUS BS BlueSense Notebook Mouse, green

new **B-MSBU LUG CH** ctn qty. 6 EDP-No. 27138
bazoo LUGUS BS BlueSense Notebook Mouse, champagne

new **B-MSBU LUG PI** ctn qty. 6 EDP-No. 27139
bazoo LUGUS BS BlueSense Notebook Mouse, pink

The new bazoo LUGUS BS Notebook mice are the first bazoo models coming with the new BlueSense sensor technology. Thanks to this new development of Microsoft users can use the mouse on almost any surface. Beside chipset modifications the existing red optical LED was exchanged with a blue high power LED - the shorter wavelength of the blue light results in a better scanning of the (desk-) surface. This makes it possible to use the mouse on difficult surfaces, e.g. white or black desks, shiny and slightly reflecting materials, etc. which makes this mouse an ideal device for travellers.

- Optical BlueSense sensor
- Adjustable sensitivity of the sensor (800 / 1,600dpi)
- USB plug
- High quality scroll wheel
- 6 buttons
- Cable length approx. 1.5m
- No driver installation necessary
- For Windows 2000, XP, Vista, and Windows 7
- Works with MacOS 10.x and Linux 2.6.x.y (standard functions)
- Packaging: blister

BLUE SENSE Technology

Mice

B-MSBU NET BK ctn qty. 5 EDP-No. 27126 new
bazoo NETO BS, USB Design Mouse, black

B-MSBU NET RD ctn qty. 5 EDP-No. 27127 new
bazoo NETO BS, USB Design Mouse, white/red

The bazoo NETO BS impresses with its unusual open design and the latest BlueSense sensor technology. As an addition design element, the blue illumination rounds off the appearance of the bazoo NETO BS and makes it a real attraction on your desk or on the move.

- Optical BlueSense sensor with 1.000 dpi resolution
- USB connection
- High quality scroll wheel
- 3 buttons
- Cable length approx. 1,5 m
- No driver installation necessary
- For Windows 2000, XP, Vista and Windows 7
- For Mac OS 10.x and Linux 2.6.x.y.
- Packaging: blister

B-MSLU NANO ctn qty. 6 EDP-No. 27131
bazoo NANO, Laser Netbook Mouse

The bazoo Nano laser mouse is the world's smallest laser mouse!
With its "size" of only 68 x 29 x 20 mm and retracting USB cable, it fits into the very smallest corner of your notebook bag and is therefore the ideal companion when you are on the move.

- USB connection
- Switchable resolution (1,000/2,000 dpi)
- 3 buttons with scroll wheel
- Automatic cable reeler for space saving mouse transport
- For Windows 2000, XP, Vista and Win 7
- For MacOS 10 and higher
- For Linux Kernel 2.6.x.y. and higher
- Packaging: blister (in retail display carton)

„Similar to illustration"

Input Devices – Mice

Mice

new

B-MSLU MAR

ctn qty. 6 EDP-No. 27124

bazoo MARA L USB MOUSE

The bazoo MARLA USB Mouse is equally suitable for right-handed and left-handed people.
The laser sensor enables the mouse to be used even on difficult surfaces.

- Laser sensor with 1,600 dpi sensitivity
- USB plug for best compatibility
- Cable length approx 1.5m
- Medium sized therefore useable as desktop or notebook mouse
- 3 buttons incl. scroll wheel
- Attractive color combination of metallic red and glossy black
- For Windows 2000, XP, Vista, and Windows 7
- Works with Linux 2.6.x.y. and Mac OS X 10.x
- Packaging: blister

Laser Sensor | 1600 dpi Sensitivity | 1,5 m Cable Length | FOR WIN 7 Operating Systems | FOR WIN 2000 XP VISTA Operating Systems | FOR MAC OS 10 + Operating Systems | FOR LINUX 2.6.x.y. Operating Systems

B-MSOU NET

ctn qty. 4 EDP-No. 27129

bazoo NETO, USB Design Mouse

The bazoo NETO is the best mouse for all users searching for a medium-sized mouse shape. Placed between typical desktop and notebook sizes this optical 5 button mouse offers a nice combination of attractive design and best functionality!

- Optical sensor with 800 dpi resolution
- USB plug
- 5 buttons (incl. scroll wheel)
- Comfortable scroll wheel
- Shiny anthrazite surface with small green decoration elements
- Side buttons for browsing through websites or explorer windows
- For Windows 2000, XP, Vista and Win 7
- Also for Linux 2.6.x.y and MacOS X
- Packaging: blister

Optical Sensor | 800 dpi Sensitivity | 1,5 m Cable Length | FOR WIN 7 Operating Systems | FOR WIN 2000 XP VISTA Operating Systems | FOR MAC OS 10 + Operating Systems | FOR LINUX 2.6.x.y. Operating Systems

B-MSOU NET W

ctn qty. 4 EDP-No. 27130

bazoo NETO, USB Design Mouse

The bazoo NETO is the best mouse for all users searching for a medium-sized mouse shape. Placed between typical desktop and notebook sizes this optical 5 button mouse offers a nice combination of attractive design and best functionality!

- Optical sensor with 800 dpi resolution
- USB plug
- 5 buttons (incl. scroll wheel)
- Comfortable scroll wheel
- Shiny anthrazite surface with small green decoration elements
- Side buttons for browsing through websites or explorer windows
- For Windows 2000, XP, Vista and Win 7
- Also for Linux 2.6.x.y and MacOS X

Thanks to its design in "Apple white", the WHITE NETO excellently matches the bazoo iBoard (IT 27149)!

Optical Sensor | 800 dpi Sensitivity | 1,5 m Cable Length | FOR WIN 7 Operating Systems | FOR WIN 2000 XP VISTA Operating Systems | FOR MAC OS 10 + Operating Systems | FOR LINUX 2.6.x.y. Operating Systems

Mice

NBK MSOU 10
ctn qty. 5 EDP-No. 23241

Optical Notebook Mouse

Ergonomic 5-button notebook mouse

- USB connection
- 800 dpi resolution
- 5 buttons with scroll wheel (programmable, software available for downloading)
- Special coating of lateral surfaces for optimum grip
- Automatic cable reeler for space saving mouse transport
- For Windows 2000, XP, Vista and Win7
- For MacOS 9.x or later
- For Linux kernel 2.6.x.y and later
- Packaging: blister (in retail display carton)

Optical Sensor | Sensitivity | Reeler | Operating Systems | Operating Systems | Operating Systems | Operating Systems

B-MSOU LUG
ctn qty. 6 EDP-No. 27128

bazoo LUGUS, Optical Notebook Mouse

Small laptop mouse with retractable USB cable and special surface coating for comfortable working on the move.

„Similar to illustration"

- USB port
- Retractable cable
- 800 dpi resolution
- 3 keys (including progammable scroll wheel)
- Elegant black with coated surface
- For Windows 2000, XP, Vista and Win7
- For MacOS 9.x and higher
- For Linux Kernel 2.6.x.y. and higher
- Supplied in practical 4-colour sales display (in multiples of 6)
- Packaging: Blister (in retail display carton)

Optical Sensor | Sensitivity | Reeler | Operating Systems | Operating Systems | Operating Systems | Operating Systems

NBK MSOC 30 RDC
ctn qty. 6 EDP-No. 22554*

Optical Mini Hot Rod Display

The Optical Notebook Hot Rod – a homage to the chrome-decorated cars of the 1950ies and 1960ies. In red, silver and black it ideally complements every notebook and every design desk.

- USB or PS/2 connection possible (adapter enclosed)
- 800 dpi resolution
- Programmable scroll wheel
- 3 colours (red, black, silver) per display
- For Windows 2000, XP, Vista and Win7
- For MacOS 9.x or later
- For Linux kernel 2.6.x.y and later
- Packaging: blister (in retail display carton)

Optical Sensor | Sensitivity | Cable Length | Operating Systems | Operating Systems | Operating Systems | Operating Systems

*With the change to the bazoo packaging, this has a new article number

Input Devices – Mice

Mice

B-MSOU MAR BK ctn qty. 6 EDP-No. 27120
bazoo MARA, Optical Notebook Mouse, black

B-MSOU MAR WH ctn qty. 6 EDP-No. 27121
bazoo MARA, Optical Notebook Mouse, white

B-MSOU MAR RD ctn qty. 6 EDP-No. 27122
bazoo MARA, Optical Notebook Mouse, red

B-MSOU MAR BL ctn qty. 6 EDP-No. 27123
bazoo MARA, Optical Notebook Mouse, blue

The bazoo MARA USB mouse is equally suited for right-handed and left-handed persons. With the USB connection, you can plug it to almost any computer and (mini) notebook – a mouse for all occasions!
The four available colours offer each user a model of his own liking.

- USB connection
- 1,000 dpi resolution
- 3 buttons (incl. scroll wheel)
- Four attractive colours (black, white, red, blue) with silver highlights
- For Windows 2000, XP, Vista and Win7
- For MacOS X or later
- For Linux 2.6.x.y
- Packaging: blister

vivanco

MSOC Display ctn qty. 18 EDP-No. 19931*
Optical Soft Touch Mouse Display

The special coating of the Optical Soft Touch Mouse allows for comfortable playing or working – and the USB-PS/2 combo plug ensures freedom of connection.

- Connection to USB and PS/2 ports
- 800 dpi resolution
- Programmable click & scroll wheel
- Colour distribution: 12 off black, 3 off blue, 3 off white
- For Windows 2000, XP, Vista and Win7
- Packaging: blister (in retail display carton)

*With the change to the bazoo packaging, this has a new article number

Mice

B-MSOU 10 ctn qty. 6 EDP-No. 28762
bazoo MARA O, Optical Mouse SUC-EDP-No. 22859

Attractive optical entry-level mouse

- USB connection
- 800 dpi resolution
- 3 buttons with scroll wheel
- For Windows 2000, XP, Vista and Win7
- For MacOS 9.x or later
- For Linux kernel 2.6.x.y and later
- Packaging: Blister

TURTLE ctn qty. 20 EDP-No. 26216
Macally Laser Notebook Mouse TURTLE

Laser notebook mouse with retractable USB cable

- 800 dpi laser sensor resolution
- Ergonomic design for both left and right hand use
- Compartment in mouse bottom to retract and store the USB cable
- 3 buttons incl. scroll wheel
- Cable length approx. 90 cm

System requirements:
- MacOS X 10.1.5 or later
- Windows 2000 (SP4), XP, Vista or Windows 7

OPTIMO ctn qty. 20 EDP-No. 27869 new
Wireless 2.4 GHz notebook mouse with USB receiver compartment

- Adjustable sensitivity (800 / 1,600 dpi)
- Ergonomic design for both right and left hand use
- Compartment for receiver and batteries below the lid
- 3 buttons incl. scroll wheel
- Incl. battery

bazoo

www.bazoo.eu

PC Audio

Subwoofer Systems

B-SP 2.2 MER

ctn qty. 2 EDP-No. 25720

bazoo MERLIN 2.2 Subwoofer System

The Merlin 2.2 Speaker System is exactly the right speaker set for people who love massive bass and powerful sound! With double bass speakers and 830 Watts (p.m.p.o.), The new 2.2 bass technology ensures perfect bass response. Separate controllers for low and high frequencies allow optimum customization for every preference.

- 44 W RMS / 830 W p.m.p.o. music power
- Separate control of bass and treble
- New 2.2 technology for extra bass power
- Piano finish front and chrome-like knobs
- Blue power LED bar
- 2 red bass LED bars
- Frequency range 45 – 18.000 Hz
- Magnetically shielded
- Satellites with RCA connection
- Incl. 3.5 mm audio cable
  for easy connection of different audio sources
- Dimensions Subwoofer: 280 x 180 x 250 mm
- Dimensions Satellites: 99 x 182 x 140 mm
- Packaging: cardboard box

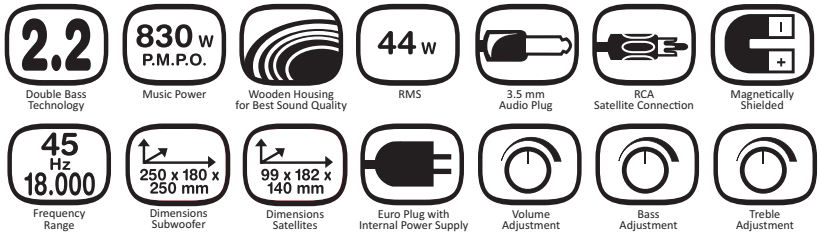

B-SP 2.1 MER TCH

ctn qty. 2 EDP-No. 27169

bazoo MERLIN TOUCH 2.1 Speaker System

The MERLIN TOUCH 2.1 system does not only offer great sound quality but also a new control concept: the adjustment of volume, bass and treble is done by an innovative sensor field on the front of the subwoofer! This allows a new and sleek design since we can leave out any switches or knobs on the front side of the subwoofer.
To offer another convenient way of controlling the system we added an infrared remote control with which all system functions can be controlled. The 2-way satellites in addition offer a well-balanced sound quality!

- New and innovative control concept with sensor control
- Glossy subwoofer front without any protruding control elements
- 40 W RMS / 850 W p.m.p.o. music power
- Separate adjustment of bass and treble
- Additional infrared remote control
- Frequency range 50 – 18.000 Hz
- Magnetically shielded
- 2-way satellites with RCA connectors
- Incl. 3.5 mm audio cable
  for easy connection of different audio sources
- Dimensions Subwoofer: approx. 220 x 220 x 365 mm
- Dimensions Satellites:approx. 100 x 220 x 160 mm
- Internal power supply with 2-pin europlug
- Packaging: cardboard box

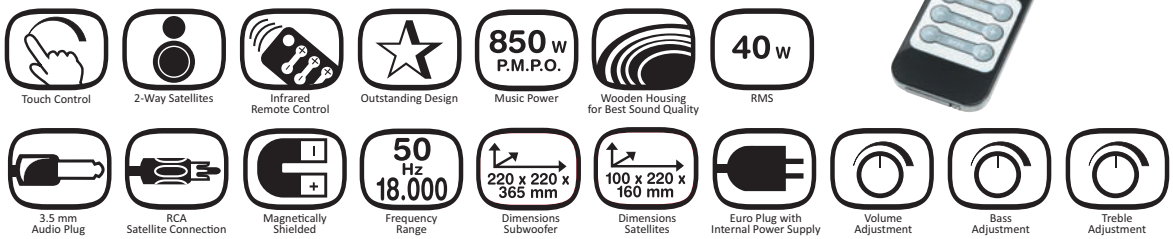

PC Audio

Subwoofer Systems

new **B-SP 2.1 NET W** ctn qty. 4 EDP-No. 27166

bazoo NETO W 2.1 Stereo Subwoofer System

The NETO 2.1W sound system optically and harmonically blends in the writing desk area thanks to its modern design and the blue satellite illumination. The apple-white color of the housings gives an even more sleek look to the whole system and pleasantly differs from standard black housings of other systems. The cable remote control permits a confortable volume regulation. The main volume can be adjusted at the subwoofer's backside, same as the bass level.

- Stereo subwoofer system
- Subwoofer housing made of MDF
- Blue illumination effects
- Balanced sound for all kinds of music

Technical description
- 12 W music power
- Frequency range 40 – 20.000 Hz
- Cable remote control for volume adjustment
- Dimensions subwoofer: 176 x 194 x 257 mm
- Dimensions satellites: 95 x 197 x 60 mm
- Connects to PC or MP3 player by 3.5 mm plugs
- Internal power supply with 2-pin euro plug
- Packaging: cardboard box

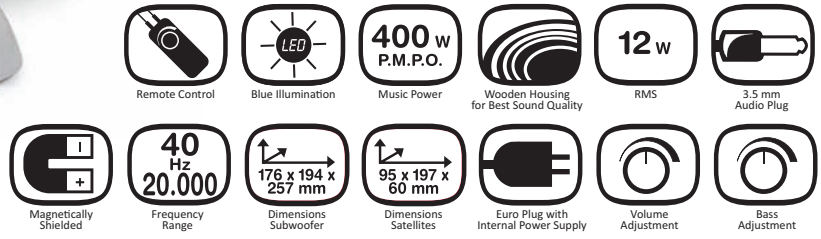

B-SP 2.1 MAR ctn qty. 2 EDP-No. 21344

bazoo MARA 250, 2.1 Speaker System SUC-EDP-No. 27162

Powerful 2.1 subwoofer sound system with a real music output of 25 W RMS. With its 2-way satellites and the huge 5.25" subwoofer, the Thor 2.1 250P system ensures rich sound playback for games, videos, MP3 and more!

Technical description
- Total music output: 25 W RMS
- Frequency range 30 Hz – 20 kHz
- Impedance 4 Ω (subwoofer) / 6 Ω (satellites)
- 5.25" loudspeaker (subwoofer) / 1"+ 3" loudspeakers (satellites)
- Cable remote control for convenient volume adjustment
- Subwoofer and satellites with high-quality MDF cases
- Internal 230 V / 50 Hz power supply
- Magnetically shielded
- Dimensions Subwoofer approx. 212 x 221 x 239 mm
- Dimensions Satellites approx. 119 x 154 x 122 mm
- Packaging: cardboard box

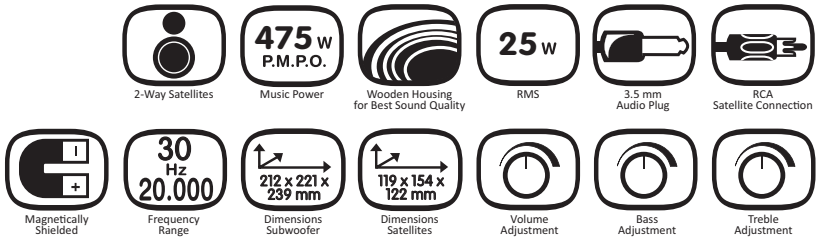

Subwoofer Systems

PRO B-SP 2.1 ctn qty. 6 EDP-No. 27159 new

bazoo MARA 2.1P, 2.1 Speaker System

The MARA 2.1P sound system offers a nice and warm sound thanks to its wooden subwoofer. Users can adjust the bass level with the controller on the back of the subwoofer.

- 2.1 sound system with wooden (MDF) subwoofer and design satellites
- Volume and bass control elements
- Magnetically shielded
- Subwoofer dimensions: 190 x 153 x 220 mm
- Satellite dimensions: 125 x 80 x 93 mm

Technical description
- 10 W RMS power
- Frequency range 40 – 20.000 Hz
- Internal power supply with 2-pin europlug
- Can be connected to any sound sources with 3.5 mm socket
- Packaging: cardboard box

Stereo Speakers

B-SP MOB LUG II ctn qty. 20 EDP-No. 27163 new

bazoo LUGUS MOBILE II, Notebook Speakers

The bazoo LUGUS MOBILE II can be easily connected and powered via USB. Transfer from the audio source is via a 3.5 mm jack plug, so that almost any stereo source can be used (MP3 player, iPod, iPhone etc.). The striking design makes it an eyecatcher on any desk, while ensuring precise direction of sound to the listener.

Technical description
- 2.0 stereo loudspeaker system
- Power supply by USB
- Audio input via 3.5 mm jack
- Magnetically shielded
- Compact and sound-optimised design
- 3 W RMS power
- Packaging: cardboard box



PC Audio

Stereo Speakers

B-SP MOB LUG ctn qty. 20 EDP-No. 27164

bazoo LUGUS MOBILE Notebook Speakers

The bazoo ODIN MOBILE II notebook speaker gets its power from the USB connection and can be plugged in to all sources with 3.5 mm stereo socket. You easily set the volume with the integrated, blue illuminated controller. Perfect sound is ensured by the direct orientation of the speaker to the listener, and the special surface coating gives the speaker system an agreeable look.

Technical description
- 2.0 stereo loudspeaker system with special surface coating
- Integrated volume control with dim blue illumination
- Power supply by USB
- Audio input via 3.5 mm jack
- Magnetically shielded
- 3 W RMS
- Compact design
- Packaging: cardboard box

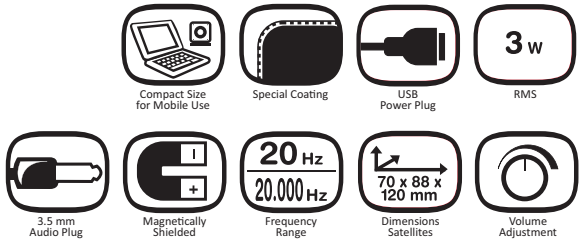

new **B-SP 100 MAR** ctn qty. 12 EDP-No. 27161

bazoo MARA 100 Stereo Speakers

The bazoo MARA 100 speaker system is best for using it with desktop or notebook computers. It upgrades the sound output significantly and makes it enjoyable to listen to music. The system has got a volume control and a built-in headphone socket so that the user can listen to the music with a headphone if he wants to - without having to disconnect the speaker system before.

Technical description
- Stereo speaker system with 6 W RMS
- Built-in power supply with 2-pin europlug
- Frequency range 120 – 18000 Hz
- Volume control
- On/off switch on satellite front side
- Headphone socket on satellite front side
- Blue power LED
- Audio connection by 3.5 mm plug

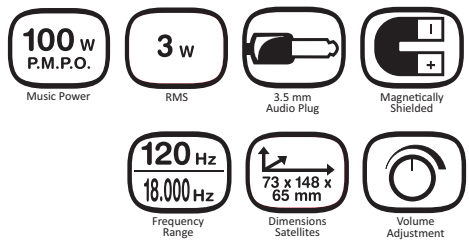

Stereo Speakers

B-SP 50 MAR ctn qty. 12 EDP-No. 27160 new

bazoo MARA 50 Stereo Speakers

The bazoo MARA 50 speaker system is best for using it with a desktop or notebook/netbook computer since the power is supplied by USB.
No additional power socket is needed to drive this system.

Technical description
- Stereo speaker system
- 2 W RMS music power
- USB power supply
- Can be connected to any sound source with 3.5 mm socket
- Frequency range 120 – 18000Hz
- Magnetically shielded
- Volume control
- Beadphone socket
- On/off switch
- Packaging: cardboard box



Wireless Headsets

B-HM BT ctn qty. 5 EDP-No. 27177

bazoo MERLIN BT Bluetooth Headset

The latest Bluetooth 2.1 technology, multipoint functions, integrated Li-Ion battery and sumptuous, fully adjustable headband -only a few selected technical details of the bazoo BLUETOOTH HEADSET! In addition to technology, the headset impresses with elegant design and outstanding sound quality, whether from a notebook and PC or mobile phone. If a phone call interrupts music or chat, the BLUETOOTH HEADSET automatically switches to hands-free phone mode -- and then back (multipoint)!

- Headset with Bluetooth 2.1 standard
- Supports A2DP, AVRCP, HFP and HSP profiles
- High quality speakers for perfect sound quality
- Adjustable headband
- Volume and track control integrated in right earpad (AVRCP)
- Multi-function key to answer/end calls, for muting the microphone, to reject a call and to play/pause music playback
- The hidden microphone underlines the elegant and slim design
- Up to 9 hours talking time and up to 240 hours standby time
- Incl. USB charging cable
- Supports A2DP, AVRCP, HFP and HSP Profiles
- Packaging: blister

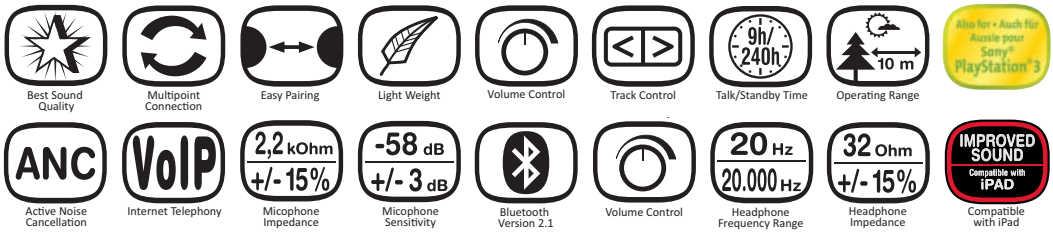

reddot design award
winner 2009

PLUS X AWARD
achieved for:
Design

bazoo
www.bazoo.eu

Headsets and Microphones

new **B-HM NET VIBE** ctn qty. 5 EDP-No. 27181

bazoo NETO VIBE, USB Stereo Vibration Headset

Thanks to its USB plug ,the bazoo NETO Vibe can be connected to any modern computer.
Switchable vibration effects increase the experience of the sound when playing games or listening to music, and support the balanced sound of the headset.

- Switchable vibration effects
- 40 mm loudspeaker
- Volume control with microphone muting switch
- Cable length approx. 2 m
- Headphone impedance 32 Ohm
- USB power supply
- Packaging: blister

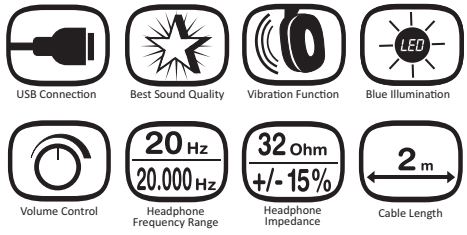

new **B-HM NET WH USB** ctn qty. 5 EDP-No. 27182

bazoo NETO W USB, USB Stereo Headset

Thanks to its USB plug, the bazoo NETOW USB can be connected to any modern computer.
The detachable microphone and balanced sound make this headset an ideal headphone for listening to music.

- Detachable microphone for comfortable listening
- 40 mm loudspeaker
- Volume control with microphone muting switch
- Cable length approx. 2 m
- Headphone impedance 32 Ohm
- USB power supply
- Packaging: blister



Headsets and Microphones

B-HM USB

ctn qty. 5 EDP-No. 23693 new

bazoo NETO USB Stereo Headset

The bazoo NETO USB headset is impressive because of its outstanding sound and its wearing comfort. Extra-soft fabric pads ensure that there is no discomfort even when used for an extended time. The integrated remote control allows fast control of the volume and muting of headphone/microphone.

- USB stereo headset
- Very good sound playback, best for gaming and chatting
- Adjustable microphone arm for optimal positioning
- Connection cable with fabric coating
- Integrated cable remote control for volume adjustmend and mute functions
- Auto-adjust headband for best wearing comfort
- Packaging: blister

Technical description
- Frequency range 20 – 20000 Hz
- Headphone impedance 32 Ohm (+/-15%)
- Microphone impedance 2,2 kOhm (+/- 15%)
- Microphone sensitivity -58 dB (+/-3 dB)
- Microphone with ANC techology (noise cancelling)+
- For Windows 2000, XP, Vista, and Windows 7
- No driver needed

B-HM ST

ctn qty. 10 EDP-No. 23692

bazoo NETO ST Headset

The bazoo ST Headset offers outstanding sound quality for all occasions and is perfectly suited for listening to music and gaming or simply for VoIP applications.

- bazoo family design with attractive metallic highlights
- 30 mm loudspeaker
- Volume control
- Cable length approx. 2 m
- Headphone impedance: 33 Ohm
- 3.5 mm plugs
- Packaging: blister

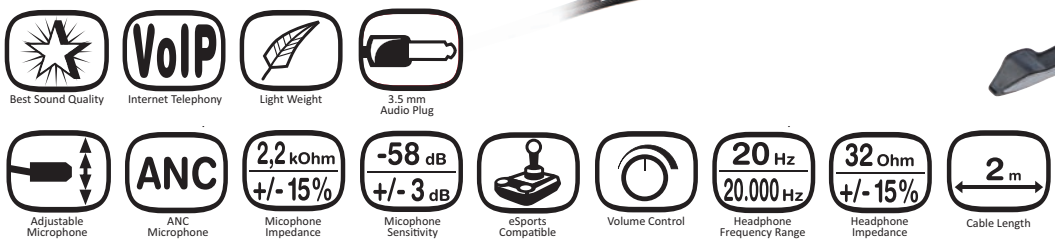

bazoo
www.bazoo.eu

Headsets and Microphones

B - HM NB

ctn qty. 10 EDP-No. 23691

bazoo NETO NB Headset

The bazoo NETO NB stereo headset is comfortable to wear; it is suitable for VoIP, listening to music or for gaming. The neckband design ensures perfect fit in all situations.

- Convenient behind-the-head neckband design
- bazoo family design with attractive metallic highlights
- 30 mm loudspeaker
- Volume control
- Cable length approx. 2 m
- Headphone impedance: 33 Ohm
- 3.5 mm plugs
- Packaging: blister



new B-HM NET WH

ctn qty. 5 EDP-No. 27178

bazoo NETO R, Stereo Headset, white

new B-HM NET RD

ctn qty. 5 EDP-No. 27179

bazoo NETO R, Stereo Headset, red

The bazoo NETO R combines an attractive retro design and modern technology to provide a universal headset for chatting (VoIP), playing games and listening to music.
The volume can be easily adjusted thanks to the integrated remote control.

- Highly fashionable retro design
- 40 mm loudspeaker
- Volume control
- Cable length approx. 1,8 m
- Headphone impedance 32 Ohm
- 3.5 mm plugs
- Packaging: blister

Headsets and Microphones

B- HM NB COL

ctn qty. 18 EDP-No. 27175

bazoo MARA COLOR Neckband Headsets

The bazoo neckband headsets come in six attractive colour combinations; their blister packaging allows them to be offered on the rear wall/gondola display or in dump bins.
The practical neckband design represents the latest trend and convinces due to its modern design and low weight!

- Six colours (3 pieces each/ctn qty.):
  black / black
  white / white
  white / red
  white / green
  white / orange
  white / violett
- Stereo headset
- 30 mm loudspeaker
- Headphone impedance: 37 Ohm
- Volume control
- Flexible microphone with matching colour highlights
- 3.5 mm plugs
- Packaging: blister



B-HM BASIC

ctn qty. 10 EDP-No. 27176 new

bazoo MARA BASIC, Stereo Headset

The MARA BASIC Stereo Headset is a comfortable headphone/microphone combination to be used for chatting or making phone calls via the Internet (VoIP) or for listening to music from the PC.
It is connected to any standard soundcard by 3.5 mm plugs.
Thanks to the integrated volume control the user can choose the volume level directly without accessing the system settings of his computer.

- Stereo headset
- 2x 3.5 mm plugs
- Adjustable headband
- Flexible microphone
- Light weight
- Built-in volume control
- Packaging: blister



PC Audio

Headsets and Microphones

B-HM MONO

ctn qty. 10 EDP-No. 23690

bazoo NETO M Mono Headset

The bazoo NETO M mono headset is also part of the new family design of the bazoo headset series. The small and lightweight headset can be worn on the left or right ear. It is ideally suited for chatting and VoIP.

- Mono headset for left or right ear
- bazoo family design with attractive metallic highlights
- 15 mm loudspeaker
- Cable length approx. 2 m
- Headphone impedance: 33 Ohm
- 3.5 mm plugs
- Packaging: blister

NBK MF MOB

ctn qty. 5 EDP-No. 22540*

Notebook Microphone

Compact microphone for voice applications with the notebook (e.g. internet telephony).

- Plug & Play – simply hook to the microphone input
- 3.5 mm plug
- Packaging: blister

Interfaces

SOUND 6C PCI-M

ctn qty. 10 EDP-No. 23449*

6-channel PCI sound card for real surround sound.
Comes with Magix Music Maker SE

- First class 3D sound experience thanks to 6-channel 16-bit Digital Audio Converter (DAC)
  16-bit full duplex CODEC with support for "Voice over IP" Internet telephony systems
- Supports Microsoft®v DirectSound 3D™
- C3DX Positional Audio for 4-channel speaker mode plus centre/subwoofer in 6-channel speaker mode
- Compatible with SB and SB Pro
- Downloadable "Wavetable Synthesizer" supports DirectMusic™
- Comes with Magix Music Maker SE audio editing software
- Includes more than 800 MB of audio and video effect files
- Ports: Loudspeaker, Microphone, Line In, 2x Game* and MIDI*

* Vista does not support these ports

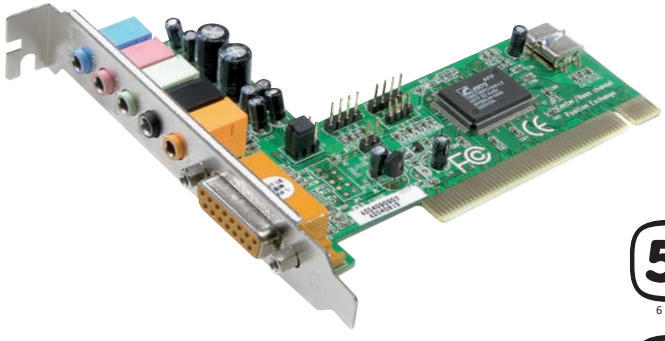

System requirements:
- 1 free PCI Slot
- Prozessor >= 500 MHz or faster
- 300 MB free disk space
- DirectX 9.1 or higher
- CD ROM drive
- Microsoft® Windows® 2000, XP, Vista or Windows 7

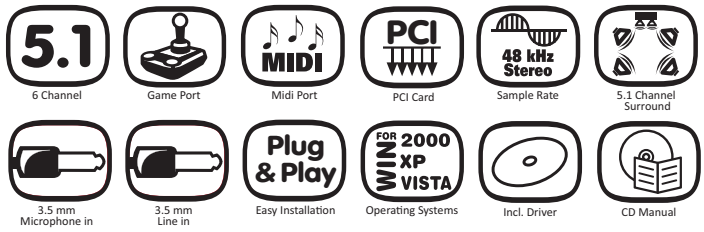

*With the change to the bazoo packaging, this has a new article number

Interfaces

SOUND 4C PCI

ctn qty. 10 EDP-No. 25713*

4-channel PCI sound card for real surround sound.

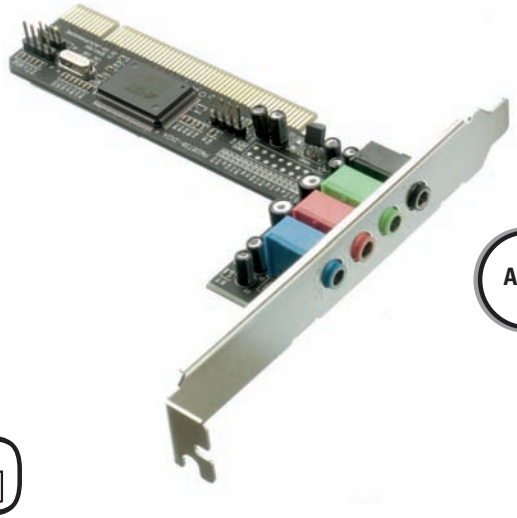

- First class 3D sound experience thanks to 4-channel, 16-bit Digital Audio Converter (DAC) 16-bit full duplex CODEC with support for "Voice over IP" Internet telephony systems
- Supports Microsoft® DirectSound 3D™
- C3DX Positional Audio for 4-channel loudspeaker mode
- Compatible with SB and SB Pro
- Downloadable "Wavetable Synthesizer" supports DirectMusic™
- Includes software
- Ports: Loudspeaker, Microphone, Line In

System requirements:
- 1 free PCI slot
- Processor >= 500 MHz or better
- 300 MB free disk space
- DirectX 9.1 or later
- CD-ROM drive
- Microsoft® Windows® 2000, XP, Vista and Windows 7

NBK USB SOUND

ctn qty. 5 EDP-No. 23474

USB 7.1 audio adapter

The USB sound adapter means the computer can easily be upgraded with a virtual surround sound card. Thanks to the stereo headset which is included in the scope of delivery, comfortable communication via the internet (VoIP) is also possible.

- Virtual surround sound card upgrade for a laptop of PC
- Simple installation on a free USB port
- Stereo headset including reeler cable
- Microsoft® Windows® 2000, XP, Vista and Windows 7
- Packaging: blister

*With the change to the bazoo packaging, this has a new article number

bazoo
www.bazoo.eu

Webcams

new **B-1,3 CAM NB** ctn qty. 5 EDP-No. 27196

bazoo NANO XS, mega-pixel webcam with microphone, driver-free

The extremely small camera is particularly suitable for laptops for chatting, stills or for monitoring rooms.

- Ready for operation immediately without driver installation thanks to USB2.0 UVC interface technology
- 1.3 mega pixel CMOS sensor
- Resolution: 1280 x 1024 physical pixels
- The face-tracking function automatically points the camera image to the face and keeps the users face in the middle of the image
- Horizontally and vertically adjustable
- Easy zoom function using software
- Integrated microphone, perfectly suitable for chatting
- USB 2.0 controller for top speed data transfer
- For stills, online chat and monitoring
- Compatible with all common messenger programmes
- Plug & Play: Install software, plug in camera – done!
- Resolutions:1280 x 1024 pixels, 640 x 480 pixels
- Max. 30fps at a resolution of 640 x 480, 15fps at 1280 x 1024
- Distance to motif: 30 cm to infinite distance
- Fixed focus lens
- Automatic white, brightness and contrast alignment
- USB docking station for optimum camera positioning on the table
- An aluminium box protects the camera during transportation

PLUS X AWARD achieved for: Ease of Use

System requirements:
- Prozessor >= 800 MHz
- Active USB 2.0 Port
- CD ROM drive
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® XP, Vista, Win 7
- Macintosh® OS 10.4.9

FACE TRACKING – Follows Users Movement
1.3 Megapixel – True Resolution
Built in Microphone
Turnable 90° For Easy Use
FOR WIN 7 – Operating Systems
FOR WIN VISTA – Operating Systems
FOR WIN XP – Operating Systems
FOR MAC OS 10.4.9+ – Operating Systems

new **B-VGA CAM NANO** ctn qty. 5 EDP-No. 27195

bazoo NANO, VGA webcam with microphone

This extremely small camera is particularly suitable for laptops for chatting, for stills or for monitoring rooms.

- 300,000 pixels CMOS sensor
- Resolution: 640 x 480 physical pixels
- Horizontally and vertically adjustable
- Integrated microphone, perfectly suitable for chatting
- USB 2.0 controller for top speed data transfer
- For stills, online chat and monitoring
- Compatible with all common messenger programmes
- Plug & Play: Install software, plug in camera – done!
- Resolutions: 640 x 480 pixels (physical) to 1280 x 960 pixels (interpolated)
- Max. 30fps at a resolution of 640 x 480
- Distance to motif: 30 cm to infinite distance
- Fixed focus lens
- Automatic white, brightness and contrast alignment
- USB docking station for optimum camera positioning on the table

System requirements:
- Prozessor >= 800 MHz
- Active USB 2.0 Port
- CD ROM drive
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® XP, Vista, Win 7

VGA 640x480 – True Resolution
Built in Microphone
Turnable 90° For Easy Use
FOR WIN 7 – Operating Systems
FOR WIN VISTA – Operating Systems
FOR WIN XP – Operating Systems

Webcams

VOIP SET VGA 2

ctn qty. 5 EDP-No. 26922* new

VGA Webcam and Stereo Headset

SUC-EDP-No. 28769

Perfect combination for voice over IP, chatting or video conferencing via internet. The built in clip allows fixation at a monitor or placement on the table or other plain surfaces. The combination works with all standard VoIP applications such as e.g. Skype.

Webcam:
- VGA resolution (640 x 480 Pixel)
- Max. resolution (via software interpolation) 1,600 x 1,200 Pixel
- Max. 30 frames/sec. @ 352 x 280 Pixel
- Focus 30mm - infinite
- Manual focus
- Facetracking by software

Headset:
- Stereo
- Frequence range 30 – 16,000 Hz
- Sensitivity 84 dB
- Impedance 32 Ohm

Microfon:
- Frequence range 100 – 100,000 Hz
- Sensitivity (1 kHz) -40 dB
- Impedance 2,2 kOhm
- VP Eyes Software included

System requirements:
- Prozessor >= 500 MHz
- Active USB 2.0 or USB 1.1 Port
- CD ROM drive
- Microsoft® Windows® 2000, XP, Vista, Windows 7

PRO CAM

ctn qty. 5 EDP-No. 23478*

Universal Webcam with Facetracking

- Face tracking function: Selectable by software
- Digital-Zoom
- Resolution: 352 x 288 Pixel, Interpolated by software: up to 1280 x 960 Pixel
- Frame rate: Max. 30 pictures/s
- Exposure control: Automatic and manual
- White balance: Automatic and manual
- Focus: f/2.4 mm
- Red function LED
- Focus range: 5 cm to infinity
- Snapshot: By software (TWAIN-Interface)
- Compatible with most popular chat-software e.g. Skype, Microsoft MSN Messenger, NetMeeting, Yahoo! Messenger
- Video-Options: Resolution, frame rate, picture quality, video format
- Picture options: Brightness, saturation, contrast, sharpness, gamma
- Camera pan-/tilt angle: Up / down 60°, left/ right 360°
- USB cable legth: 1.5 m
- Included software: VP-EYES 6.0

System requirements:
- Prozessor >= 500 MHz
- Active USB 2.0 or USB 1.1 Port
- CD ROM drive
- Microsoft® Windows® 2000, XP, Vista, Windows 7



*With the change to the bazoo packaging, this has a new article number

Video / Power

Webcams

macally™

ICECAMII ctn qty. 20 EDP-No. 26217

Macally Webcam "ICECAM II"

USB 2.0 webcam with microphone

- UVC standard compatible webcam (no driver required)
- Adjustable focus lens: 640 x 480 VGA resolution
- Up to 30 frames/sec (Depends on computer hardware, application and internet speed)
- Flexible base/mount clip
- 1.5 m cable with USB plug
- Power/status LED indicator
- Microphone

System requirements:
- USB port
- Mac OS X v10.4.11 or later
- Microsoft Windows XP SP2 / Vista

AC/DC – Netbook Power Supplies

vivanco

new **NBK POWER AC65** ctn qty. 5 EDP-No. 28118*

Universal switching power supply for Notebooks and Netbooks

- Can be used as a replacement for a lost or broken original PSU or as a second PSU for home/office use
- Can be used for modern Mini-Notebooks (Netbooks)
- Reverse voltage protection
- Over-current protection
- Short circuit protection
- Over-voltage protection
- Over-power protection
- Easy voltage adjustment
- 9 tips for different Notebook brands
- Adjustable output voltages: 9.5V / 12V / 14V / 16V / 18.5V / 19V / 20V

Technical Discription:
- Input voltage 100 – 240 VAC~ 50 – 60 Hz
- Max. output power 65 W
- Max. output current 3.5 A (9.5 - 18 V) or 3.25 A (19/20 V)
- Works with many Notebook/Netbook brands, e.g.:
  ASUS, Benq, Compaq, Dell, Fujitsu-Siemens, HP, IBM, LG, Lenovo, Samsung, Sony, Toshiba, and more (more detailed list can be found on vivanco.com)



*With the change to the bazoo packaging, this has a new article number

AC/DC – Netbook/Notebook Power Supplies

NBK POWER AC72

ctn qty. 5 EDP-No. 28119* new

Universal switching power supply for Notebooks and Netbooks

- Can be used as a replacement for a lost or broken original PSU or as a second PSU for home/office use
- Can be used for modern Mini-Notebooks (Netbooks)
- Reverse voltage protection
- Over-current protection
- Short circuit protection
- Over-voltage protection
- Over-power protection
- 12 tips for different Notebook brands
- Adjustable output voltages: 9.5V / 12V / 16V / 18.5V / 19V / 20V / 24V

Technical Discription:
- Input voltage 100 – 240 VAC~ 50 – 60 Hz
- Max. output power 72W
- Max. output current 3.5 A (9.5 – 20 V) or 3 A (24 V)
- Works with many Notebook/Netbook brands, e.g.:
  ASUS, Benq, Compaq, Dell, Fujitsu-Siemens, HP, IBM, LG, Lenovo, Samsung, Sony, Toshiba, and more (more detailed list can be found on vivanco.com)





NBK POWER AC90II

ctn qty. 5 EDP-No. 28120* new

Universal switching power supply for Notebooks

- Can be used as a replacement for a lost or broken original PSU or as a second PSU for home/office use
- Reverse voltage protection
- Over-current protection
- Short circuit protection
- Over-voltage protection
- Over-power protection
- Easy voltage adjustment
- 6 tips for different Notebook brands
- Also works with Netbooks
- Works with many Notebook/Netbook brands, e.g.:
  ASUS, Benq, Compaq, Dell, Fujitsu-Siemens, HP, IBM, LG, Lenovo, Samsung, Sony, Toshiba, and more (more detailed list can be found on vivanco.com)

Technical Discription:
- Input voltage 100 – 240 VAC~ 50 – 60 Hz
- Max. output power 90 W
- Max. output current 4A (15 – 22 V) or 3,75 A (24 V)
- Adjustable output voltages: 15V / 16V / 18V / 19V / 20V / 22V / 24V



*With the change to the bazoo packaging, this has a new article number

AC/DC – Notebook Power Supplies

new **NBK POWER AC90III** ctn qty. 5 EDP-No. 28121*

Universal Notebook Power Supply

- Can be used as a replacement for a lost or broken original PSU or as a second PSU for home/office use
- Reverse voltage protection
- Over-current protection
- Short circuit protection
- Over-voltage protection
- Over-power protection
- 5 tips for different Notebook brands
- Works with many Notebook/Netbook brands, e.g.: Acer, ASUS, Benq, Compaq, Dell, Fujitsu, Hitachi, HP, IBM, LG, Lenovo, NEC, Samsung, Sharp, Sony, Toshiba, and more

Technical description
- Input voltage 100 – 240 VAC~ 50 – 60 Hz
- Max. output power 90 W
- Max. output current 4,74 A (16 V / 19 V)
- Adjustable output voltages (by resistor): 16V / 19V



DC/DC – Notebook Power Supplies

new **NBK POWER DC120** ctn qty. 5 EDP-No. 28123*

Car/air power supply for Notebooks and Netbooks

- Best for travelling
- Reverse voltage protection
- Over-current protection
- Short circuit protection
- Over-heating protection
- Easy voltage adjustment
- 12 tips for different popular notebook brands
- Can be used for car or airplane
- Works with many Notebook/Netbook brands, e.g.: ASUS, Benq, Compaq, Dell, Fujitsu-Siemens, HP, IBM, LG, Lenovo, Samsung, Sony, Toshiba, and more

Technical description
- Input voltage 12 V / 12 A max.
- Max. output power 120 W
- Max. output current 6 A (15 – 20 V) or 5 A (22/24 V)
- Adjustable output voltages: 15V / 16V / 18V / 19V / 20V / 22V / 24V

*With the change to the bazoo packaging, this has a new article number

DC/DC – Notebook Power Supplies

NBK POWER DC72 ctn qty. 5 EDP-No. 28122* new

Car/air power supply for Notebooks

- Best for travelling
- Reverse voltage protection
- Over-current protection
- Short circuit protection
- Over-heating protection
- Easy voltage adjustment
- 6 tips for different popular notebook brands e.g.: ASUS, Benq, Compaq, Dell, Fujitsu-Siemens, HP, IBM, LG, Lenovo, Samsung, Sony, Toshiba, and more
- Can be used for car or airplane

Technical description
- Input voltage 12 V / 8 A max.
- Max. output power 72 W
- Max. output current 4 A (15 – 18 V) or 3 A (19 – 24 V)
- Adjustable output voltages: 15V / 16V / 18V / 19V / 20V / 22V / 24V

Accessories

NBK POWER INV ctn qty. 5 EDP-No. 26278* new

Car Power DC/AC Inverter with USB Charging Function

- Compact cylindrical voltage converter for connecting AC devices in cars
- Fits into bottle holder
- Charging function for charging of USB chargeable devices
- E Mark: CE, (E8) 10R-02 07191

Technical description
- Input: 12 – 13.8 V=; max. 13 A
- Max. Output Power/Current: 300 W (briefly) / 150 W
- Output Voltage: 220 – 240 V 50 Hz, modified sine-wave
- Output Socket: Schuko
- USB: 5 V = (USB), max. 500 mA
- Output Socket: USB socket type A

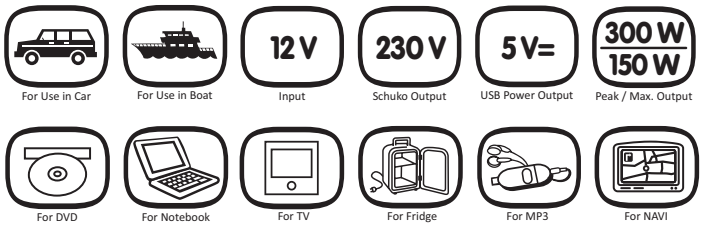

*With the change to the bazoo packaging, this has a new article number

Accessories

vivanco

new **NBK USB CHARGE** ctn qty. 5 EDP-No. 26284*

Mini vehicle adapter with USB connector

- Very small and compact charging adapter for the 12 V cigarette lighter socket in cars
- 5 V / 1 A output (suitable for iPods and iPhones)
- 12 – 13.8 input voltage
- LED operating indicator

vivanco

NBK TRAVEL KIT ctn qty. 50 EDP-No. 25710*

Traveller's connection set

Universal travel plug set for safe use with earth connection plugs (e.g. laptop power units etc.)

- Including 7 adapters for more than 150 countries throughout the world
- Children security
- Including transport bag
- Suitable for Schuko and European plugs

The travel plug is not a voltage and frequency converter!

*With the change to the bazoo packaging, this has a new article number

Wireless LAN

The terms “WIFI” or “wireless LAN” refer to the technology and products needed to integrate computers, PDAs, smartphones, multimedia servers or games consoles into a local area network WITHOUT CABLES. Often it is not possible to install network cables in buildings, e.g. rented flats (see system example I).

WIFI is the solution to this problem: computers and WIFI compatible devices can be arranged throughout buildings fully flexibly. The devices are even connected to each other, with network printers, memory devices and the internet through walls. When using notebooks or PDA, freedom is unlimited and there are no longer any cables to limit mobility (see system example II).

System example I

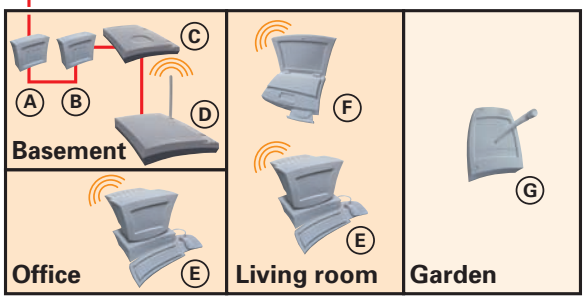

Internet in the whole house:
Online shopping
Online banking
Media datenbank

System example II

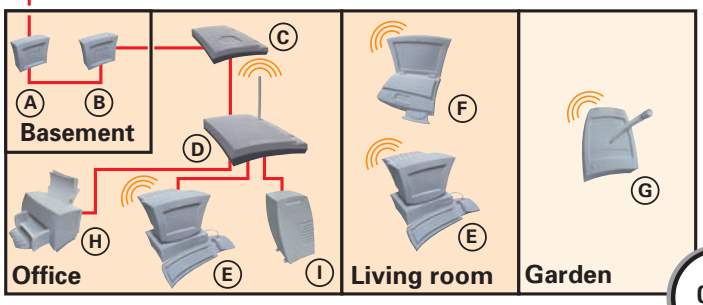

Ⓐ : Domestic telephone line
Ⓑ : Splitter
Ⓒ : DSL modem
Ⓓ : WLAN router
Ⓔ : Desktop PC with WLAN capability
Ⓕ : Notebook
Ⓖ : Tablet PC/Smartphone
Ⓩ : Printer with PrintServer
Ⓘ : NAS = Network attached storage

Speed of WIFI networks:

All WIFI technology is based on the IEEE 802.11 standard.
There are currently 3 subordinated standards which defined the basic speeds for this 2.4 GHz radio technology.

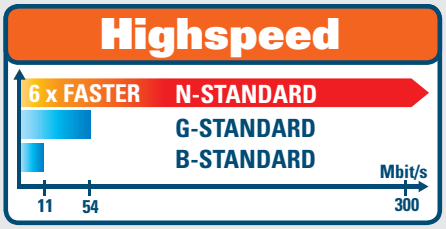

Wireless Network
N-STANDARD
up to 300 Mbit/s

Networks based on IEEE802.11n are necessary for the transfer of large volumes of data, e.g. for video transfers or backups.

Wireless Network
G-STANDARD
up to 54 Mbit/s

IEEE 802.11g based networks are sufficient for normal applications such as internet, e-mail or transmitting audio streams.

Wireless Network
B-STANDARD
up to 11 Mbit/s

IEEE 802.11b based networks are sufficient for occasional internet surfing with no major download requirement.

Connectivity

Wireless LAN

new **WLAN USB-300** ctn qty. 5 EDP-No. 26262*

Wireless LAN USB Adapter, 300 MBit/s

Wireless Network
N-STANDARD
up to 300 Mbit/s

This compact USB 2.0 to WIFI-n adapter allows wireless communication between computers and other WIFI devices. E.g. Wireless access to the internet. This adapter not only allows a network to be set up, but also provides access to the Internet via hotspots in public locations. Easy to operate software for configuration, monitoring and diagnosis purposes are enclosed.

- WIFI-n standard (IEEE 802.11n) for up to 6-times faster data transfer
- Compatible with former WIFI networks according to 802.11b and 802.11g standard
- Encryption: 64/128-bit WEP and WPA (TKIP withIEEE802.1x), WPA2, AES for data security
- Easy configuration with WPS via mouse click from the enclosed software
- Range: up to 100 m in buildings, up to 300 m out of doors (depending on ambient conditions)
- MIMO-construction with multiple internal antennas for stable RF connection
- 1T2R-technology for downloads up to 300MBit/s / uploads up to 150MBit/s
- LED indicator for link status
- Dimensions: 77 x 26 x 12 mm
- Packaging: Giftbox

System requirements:
- Computer with USB support (USB 2.0 required for maximum datarate)
- Microsoft® Windows® 2000, XP, Vista, Win 7
- Mac OS 10.x

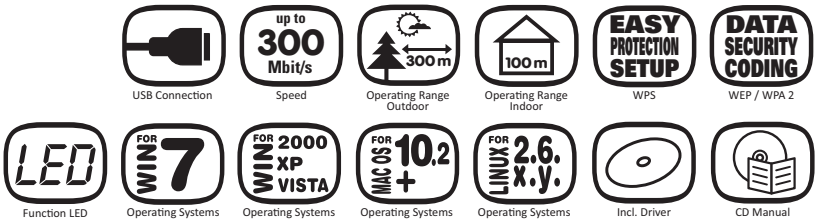

new **WLAN USB-150** ctn qty. 5 EDP-No. 26923

Wireless LAN USB Adapter, 150 MBit/s

Wireless Network
N-STANDARD
up to 150 Mbit/s

This miniaturised USB2.0 to WIFI-n adapter allows wireless communication between a desktop or notebook PC and other Wireless LAN devices. This adapter not only allows a network to be set up, but also provides access to the Internet via hotspots in public locations. Easy to operate software for configuration, monitoring and diagnosis purposes are enclosed. Due to its extremely small housing it can remain plugged in to the USB port during transport.

- IEEE 802.11b/g/n standard for data transfer rates up to 150 MBit/s
- Compatible with former networks according to 802.11b, 802.11g and 802.11n standard devices
- Encryption: 64/128-bit WEP and WPA (TKIP withIEEE802.1x), WPA2, AES for data security
- Easy configuration with WPS via mouse click from the enclosed software
- Range: up to 100 m in buildings, up to 300 m out of doors (depending on ambient conditions)
- Dimensions: 25 x 14 x 6 mm
- Packaging: blister

System requirements:
- Computer with USB support (USB 2.0 required for maximum datarate)
- Microsoft® Windows® 2000, XP, Vista, Win 7
- Mac OS 10.x
- Linux: minimum Kernel version 2.6.x.y

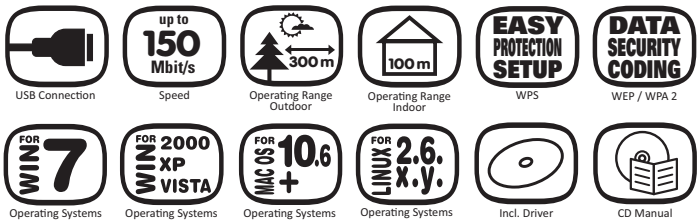

*With the change to the bazoo packaging, this has a new article number

Wireless LAN

WLAN USB 54-N ctn qty. 5 EDP-No. 23413*

Wireless LAN USB adapter. 54 Mbps

This extremely compact USB 2.0 to Wireless LAN adapter allows wireless communication between a desktop or notebook PC and other Wireless LAN devices. This adapter not only allows to set up a network but also provides access to the Internet via hotspots in public locations. Easy to operate applications for configuration. monitoring and diagnosis purposes are enclosed.

- IEEE 802.11b/g standard
- Compatible with 802.11b and 802.11g standard devices
- 64-/128-bit WEP and WPA encryption for data security
- Range: up to 100 m in buildings. up to 300 m out of doors (depends on ambient conditions)
- LED indicator for Link Status
- Dimensions: 77 x 26 x 12 mm
- Packaging: cardboard box

System requirements:
- Computer with USB support (USB 2.0 is required for max. data rates)
- Microsoft® Windows® 98SE, 2000, ME, XP or Vista

Network

NET 100 GX PCI-N ctn qty. 10 EDP-No. 23412*

PCI -> 10/100 Mbps Ethernet Card

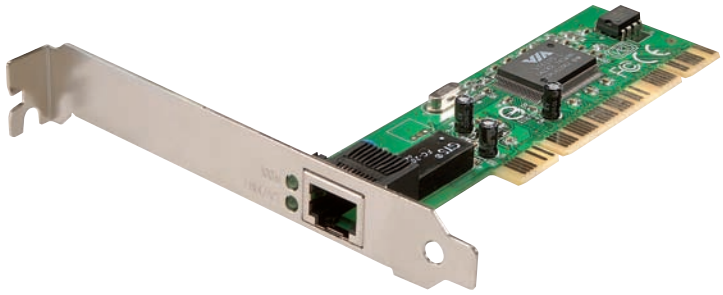

This 10/100 Fast Ethernet PCI card lets you link your PC to a network or replaces defective or legacy 10 Mbps adapters.

- For all networks compliant with the Fast Ethernet (100 Mbps) or Ethernet (max. 10 Mbps) standards
- IEEE 802.3. 10BASE-T & IEEE 802.3u 100Base-TX compatible
- Full duplex (20/200/2000 Mbps)
- RJ45 UTP (up to 10 Mbps only) or STP (100 Mbps) connection
- Supports PCI 2.2 Wake-On-Lan power management
- LEDs on the bracket indicate the network status
- Easy installation even for beginners due to P&P
- Package: cardboard box

System requirements:
- Computer with PCI slot Rev. 2.2 or compatible
- Microsoft® Windows® 98 SE, 2000, ME, XP, Vista

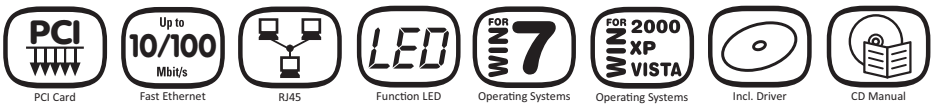

*With the change to the bazoo packaging, this has a new article number

Connectivity

Network

NET 1000 PCI-N

ctn qty. 5 EDP-No. 23406*

PCI -> 10/100/1000 Mbps Ethernet Card

This 10/100/1000 Mbps Gigabit Ethernet PCI card offers cutting-edge technology for wired networks. It is ideal if you wish to boost data transfer speed, e.g. for video conferencing or other applications with large data volumes.

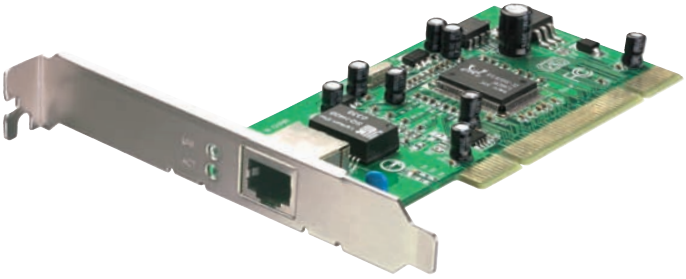

- IEEE 802.3. 802.3u & 802.3ab standard
- Fully compatible with existing 10/100 Mbps networks
- RJ45 port with automatic detection of 10 Mbps / 100 Mbps Fast /1000 Mbps Gigabit Ethernet
- RJ45 port supports auto-uplink (MDI-II / MDI-X) for all three speeds
- Full duplex (20/200/2000 Mbps)
- Supports IEEE 802.1Q VLAN
- Supports PCI 2.2 Wake-On-Lan power management
- LEDs on the bracket indicate the network status
- Package: blister

System requirements:
- Compatible with PCI 2.1 and 2.2 specifications
- Microsoft® Windows® 2000, ME, XP, Vista or Win 7

NET 100 SW5-N

ctn qty. 5 EDP-No. 23407*

10/100Mbps Ethernet switch with 5 ports

Fast Ethernet Switch for establishing a star topology network of up to 5 network members such as PCs, print servers or NAS.

- For all 10/100 Mbps networks
- Standards: IEEE 802.3 (10Base-T), 802.3u (100Base-TX) and 802.3x (full duplex flow control)
- 5 RJ45 ports with auto-uplink
- Automatic detection of 100 Mbps or 10 Mbps data rates
- Supports full duplex (20/200 Mbps) and half duplex (10/100 Mbps) modes
- Network status indication by LEDs
- Dimensions: 125 x 70 x 30 mm
- With magnetic feet for fastening on the PC case, for example
- Packaging: blister

System requirements:
- Existing Ethernet network with 10/100 Mbps

*With the change to the bazoo packaging, this has a new article number

USB 3.0 - The new standard

USB is by far the most common connection for IT devices. It was originally developed in order to simplify the wide range of connections to PCs and to enable installation of various accessories such as mice, keyboards, webcams etc. USB has now become the standard connection for almost all digital devices such as netbooks, notebooks, Smartphones and all-in-one PCs.

With the new "SuperSpeed" USB 3.0 version, this connection has once again been considerably improved. As USB 3.0 has been officially adopted as the global standard, perfect functionality between the relevant devices is now ensured.

Essential features of USB 3.0:

1. **Speed is the most important feature:**
   5GBit/s means a data transfer rate which is about 10x higher than with USB 2.0!
   Users of external hard drives will notice a considerable difference.

This is illustrated by a comparison between USB 3.0 and previous types of connection

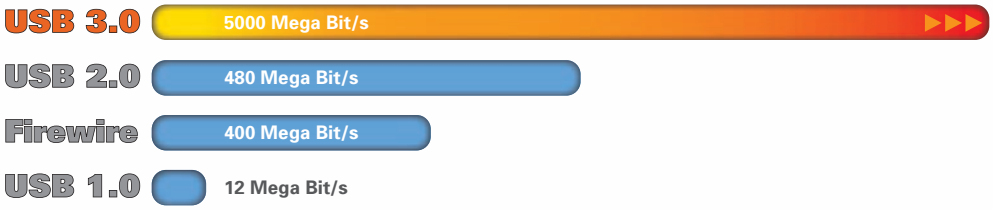

In order to achieve the maximum transfer rate of 5 GBit/s, all components in the connection chain (boards -> cables -> devices) must be certified for USB 3.0
Vivanco has the necessary range of accessories.

Thanks to optimisation of communication between devices (transfer protocol) even the connection of USB 2.0 devices (e.g. USB memory sticks) to USB 3.0 ports can result in a speed increase of up to 8%.

2. **Compatibility:**
   USB 3.0 devices are compatible with USB 2.0 and USB 1.1, however they then only provide the specified data transfer rates.

3. **Energy efficiency:**
   USB 3.0 supports various power saving modes, which in particular increases the operating times of battery-powered devices.

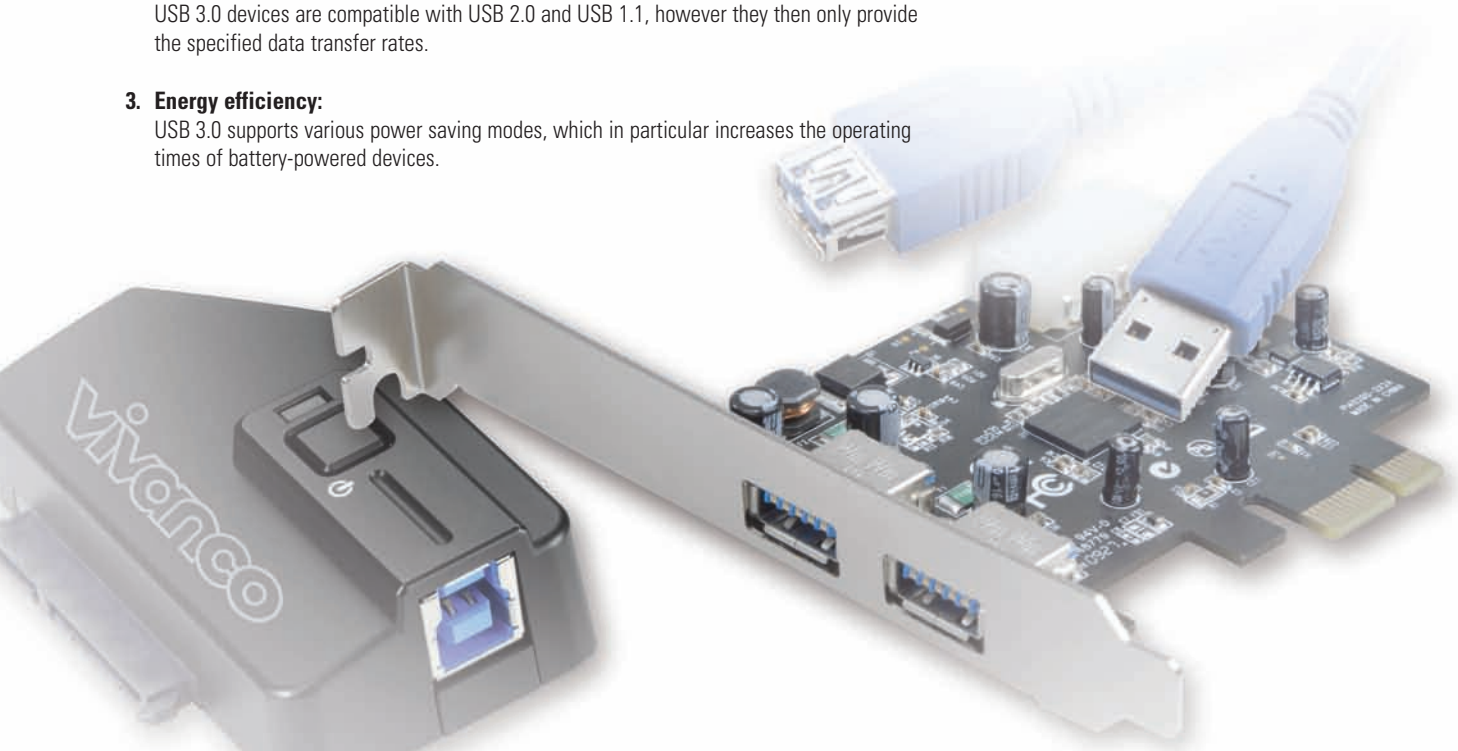

Connectivity

USB 3.0

new **USB3 2P PCIE** ctn qty. 5 EDP-No. 28130*

USB 3.0 Card for PC's with 2 USB ports

This interface card is used to tune PC's without USB 3.0 connector. The new generation of USB devices allows 10-times faster data transfer between computers and connected USB 3.0 devices.
Note: All components must be USB 3.0 certified to benefit by SuperSpeed data transfer (Interface, cable, device). Fitting connections you can find on page 63.

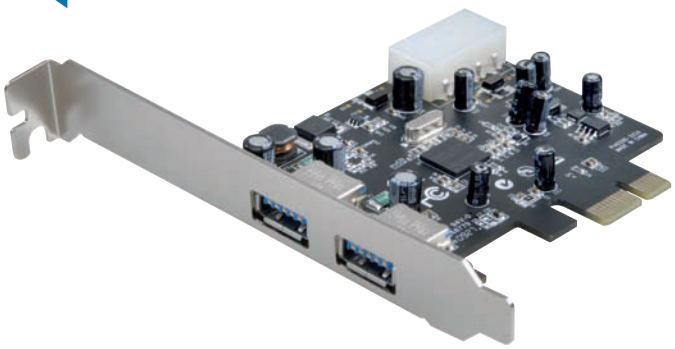

Users of USB 2.0 devices will also benefit by USB 3.0 interfaces due to optimized data processing. Datarates of USB 2.0 devices (e.g. memory sticks) may increase by ~8%.

- 2 x USB 3.0 SuperSpeed ports
- Supports data transfer rates of up to 5 GBit/s (approx. 10x faster than USB 2.0)
- Compatible with USB 2.0 and USB 1.1
- Suitable for all devices with "SuperSpeed" (5 GBit/s), "HighSpeed" (480 MBit/s) and "FullSpeed" (12 MBit/s)
- PCIe connector for PC
- Power connector to connect with internal PC-power supply
- Packaging: blister

System requirements:
- Windows® XP / Vista / 7 (Each 32 and 64 bit) or higher
- Free PCI Express slot (Recommended PCI Express 2.0)

new **USB3 2P PCCE** ctn qty. 5 EDP-No. 28131*

Express Card -> USB 3.0 card with 2 USB ports

This interface card is used to tune notebooks or netbooks without USB 3.0 connector.
The new generation of USB devices allows 10-times faster data transfer between computers and connected USB 3.0 devices.
Note: All components must be USB 3.0 certified to benefit by SuperSpeed data transfer (Interface, cable, device) Fitting connections you can find on page 63.

USB 3.0 interfaces due to optimized data processing. Datarates of USB 2.0 devices (e.g. memory sticks) may increase by ~8%.

- 2 x USB 3.0 SuperSpeed ports
- Supports data transfer rates of up to 5 GBit/s (approx. 10x faster than USB 2.0)
- Compatible with USB 2.0 and USB 1.1
- Suitable for all devices with "SuperSpeed" (5 GBit/s), "HighSpeed" (480 MBit/s) and "FullSpeed" (12 MBit/s)
- Express Card Anschluss für Notebooks/Netbooks
- Power adapter 2A included
- Packaging: blister

System requirements:
- Windows® XP / Vista / 7 (Each 32 and 64 bit) or higher
- Free ExpressCard port 34 mm

*With the change to the bazoo packaging, this has a new article number

USB 3.0

USB3 SATA

ctn qty. 5 EDP-No. 28132* new

USB 3.0 SATA Harddisk Adapter

SuperSpeed USB 3.0 up to 5 Gbit/s

The adapter is used to connect serial ATA harddisks with PC's, notebooks or netbooks using USB 3.0 connection. The new generation of USB devices allows up to 10-times faster datatransfer compared to USB 2.0. Requirement for maximum datarate of up to 5GBit/s: Adapter must be connected to USB 3.0 interface.
In case this interface is missing it can be added by Vivanco items 28130 or 28131.
Easiest usage due to plug&play. No driver installation necessary. The harddisk will be integrated automatically in the system.

- Supports data transfer rates of up to 5 GBit/s (approx. 10x faster than USB 2.0)
- Supports High Speed USB 2.0 (480 MBit/s) - compatible with USB 1.1
- Enables access to SATA drives via USB
- Supports 49 Bit LBA
- Supports SATA II 1.5 GBit/s or 3.0 GBit/s operation
- Compatible with serial ATA specification 1.0 and 2.0
- Supports Ultra DMA and Multi-Word DMA 0-2
- Plug & Play – Hot Swapping
- Includes external switched mains unit for the power supply of the hard drive, 5 V / 2 A and 12 V / 2 A
- Includes all the necessary USB 3.0, SATA connecting cables
- Package: cardboard box

System requirements:
- Free USB 3.0 port
- Windows® XP / Vista / Win 7 (each 32 and 64 bit) or higher
- *MAC OS X and Linux minimum Kernel version 2.6.x.y

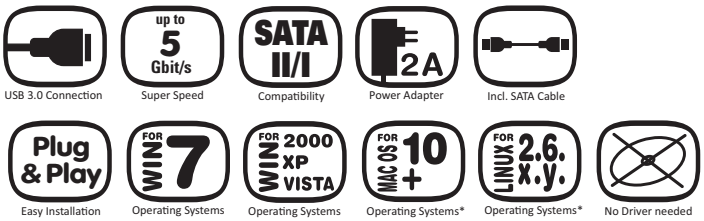

Hard drive not included

USB3 HUB 4A

ctn qty. 5 EDP-No. 28360 new

USB 3.0 Hub with 4 ports

SuperSpeed USB 3.0 up to 5 Gbit/s

SuperSpeed USB 3.0 hub with the latest technology for connection of up to four USB devices.
Includes USB 3.0 connection cable and European switched power adapter.
Prerequisite for maximum data transfer rate of up to 5GBit/s: Connection of the adapter to a USB 3.0 port. If this is not available, the port can be upgraded with Vivanco products 28130 and 28131.

„Similar to illustration"

Features:
- Elegant design, with 4 USB ports
- 5 GBit/s (approx. 10x faster than USB 2.0)
- Meets USB specification USB 3.0 Full downward compatibility to USB 2.0 and USB 1.1
- Suitable for all devices with "SuperSpeed" (5GBit/s), "HighSpeed" (480 MBit/s) and "FullSpeed" (12 MBit/s)
- Including function LEDs
- Including switched power adapter 5 V 2.5 A
- Packaging: blister

System requirements:
- Computer with USB support
- Windows® XP, Vista or Win 7

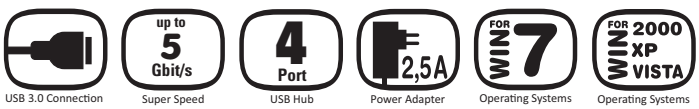

Connectivity

USB 2.0 Adapters

USB SER-N

ctn qty. 5 EDP-No. 23425*

USB -> seriell adapter

This USB to series adapter provides a compatible serial interface to connect PCs or notebooks via the USB port.

- USB to D-Sub 9 pin connector
- Supports all common RS-232 baud rates
- Fully UART-compatible
- Suitable for all popular serial devices
- Cable length: 1.5 m
- Compatible with USB 1.1 / 1.0
- Package: blister

System requirements:
- Computer compatible with USB 1.1 or higher
- Microsoft® Windows® 98SE, 2000, ME, XP, Vista or Win 7

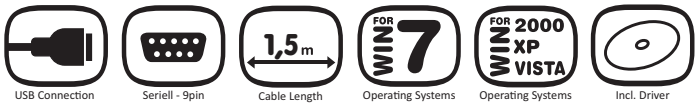

USB PS/2-N

ctn qty. 5 EDP-No. 23426*

USB -> 2x PS/2 adapter

Provides two completly compatible PS/2 connections on PCs or notebooks

- USB to PS/2 port converter
- For simultaneous operation of PS/2 keyboard and PS/2 mouse
- PS/2 keyboard and PS/2 mouse connect to one adapter
- Compatible with USB 1.1 / 1.0
- Supports Hot Plug & Play
- Supports multimedia functions of common keyboards
- Package: blister

System requirements:
- Computer with USB support (USB 1.1 or higher)
- Microsoft® Windows® 98SE, 2000, ME, XP, Vista or Win 7

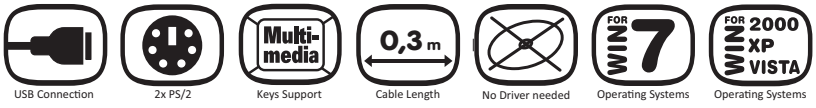

USB PAR-N

ctn qty. 5 EDP-No. 23427*

USB parallel adapter, USB to centronics

Connects printer with Centronics port to USB port

- USB type A connector to Centronics 36 pin connector
- Supports standard PC parallel port applications
- Cable length: 1.8 m
- Compatible with USB 1.1 / 1.0
- Package: blister

System requirements:
- Computer with USB support (USB 1.1 or higher)
- Microsoft® Windows® 98SE, 2000, ME, XP, Vista or Win 7

*With the change to the bazoo packaging, this has a new article number

USB 2.0 Adapters

USB2 NET-N

ctn qty. 5 EDP-No. 23482*

USB 2.0 -> 10/100 network adapter

This USB to Fast Ethernet adapter converts an USB port on a PC or notebook into a high-speed Ethernet port. Due to the USB high-speed technology Ethernet bandwidth of 100 Mbps can be supported.

- USB type A plug to RJ45 socket for connection to networks via Ethernet cables
- Full-speed USB standard, compatible with USB 1.1
- 10/100 Mbps Fast Ethernet controller
- Compatible with IEEE 802.3u 100 BASE-T, TX, and T4
- Supports full and half duplex modes
- Cable length: 1.8 m
- Package: blister

System requirements:
- Computer with USB support (USB required for 100 Mbps)
- Microsoft® Windows® 98SE, 2000, ME, XP, or Vista
- Nintendo® Wii®

USB2 LINK PCMAC

ctn qty. 5 EDP-No. 26273*

USB 2.0 link cable PC / MAC

USB 2.0 link cable for easy PC <-> PC, PC <-> MAC or MAC <-> MAC data exchange.
Software already integrated in the cable, making an installation of drivers or software unnecessary.
Simply plug the cable to a USB port, wait for the application to launch; then copy, move or rename files.

- Runs with PC and MAC – also for PC-MAC combinations
- Ready for use at any time since the software is integrated in the cable
- Software launches automatically as soon as you plug the cable to the PC
- No need to install drivers or software
- Supports High Speed USB 2.0 (480 MBit/s) – compatible with USB 1.1
- Ideal for synchronising or restoring data
- LED status display for both connections
- Intuitive software
- Plug & Play
- Package: blister

System requirements:
- Free USB 2.0 port
- Windows® 2000/ XP/ Vista/ Win 7
- MAC OS 10.3 or higher

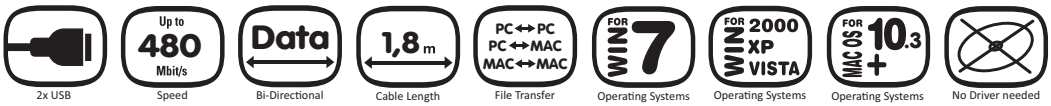

*With the change to the bazoo packaging, this has a new article number

Connectivity

USB 2.0 Adapters

USB2 ESATA

ctn qty. 5 EDP-No. 26272*

USB 2.0 -> eSATA adapter

USB-Adapter to connect external hard drives with SATA- (Serial ATA) -interface. This product is required for computers which do not have built in SATA interface. E.g. notebooks due to limited space or older PCs. This device is convenient to use without opening the housing of the computer.

- Supports eSATA I und eSATA II (150 MByte/s und 300 MByte/s) or (1,5 GBit/s und 3,0 GBit/s)
- 0.1 m eSATA cable included
- USB 2.0 for maximum data transfer rate
- Compatible to USB 1.1 (Not max. read/write - speed supported)
- No drivers needed
- Package: blister

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000, XP, Vista, Win7 or MAC OS 9.x+

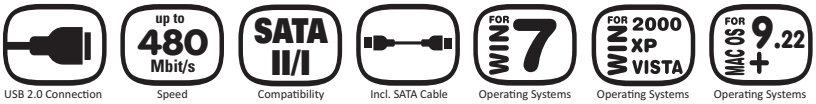

USB2 EXT-N

ctn qty. 5 EDP-No. 23424*

Active USB 2.0 extension

Active USB 2.0 Extension, extends USB ports by 5 m

- Signal booster integrated in extension
- Maintains the USB 2.0 signal quality and ensures compliance with USB specifications
- Allows cable extensions of up to 24 m
- Supports low-speed, high-speed and full-speed devices
- Cable length: 5 m
- Package: blister

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 98SE, 2000, ME, XP, Vista, Win 7 or MAC OS 10.1+

USB2 SATA/IDE

ctn qty. 5 EDP-No. 23492*

USB 2.0 to SATA / IDE adapter incl. power adapter

Connect quickly and convenient all 2.5"/ 3.5" SATA and IDE/PATA hard disk drives (HDDs) to your notebook or desktop PC via USB 2.0 interface.

- Supports high speed USB 2.0 - 480 Mbps - compatible to USB 1.1 and 1.0
- Allows an access to all 40 pin (3.5") and 44 pin (2.5") IDE and all SATA HDDs
- Compatible to Serial ATA specifikation 1.0
- Supports Ultra DMA 0-6 and multi word DMA 0-2
- Supports Plug & Play
- Connect all IDE optical drives as CD or DVD writer
- Supports "hot swapping"
- Incl. external power adapter 5V 2A - 12V / 2A
- Incl. USB 2.0, SATA and molex to SATA cable
- Package: cardboard box

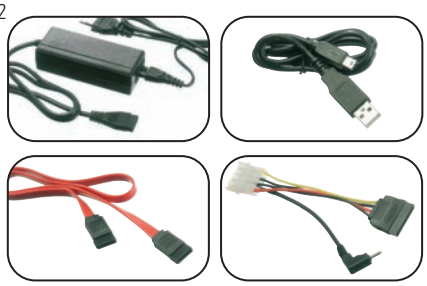

System requirements:
- Free USB 2.0 port
- Windows® 2000, XP, Vista or Win 7



*With the change to the bazoo packaging, this has a new article number

USB 2.0 Hubs

Environmental protection by way of energy saving becomes more and more important. Everybody is using terms like Green IT, standby current, energy efficiency or carbon dioxide emission. But everyday life is totally different. Does it annoy you when USB devices continue running although you turned off your computer? Everyday situations like the following contradict the idea of environmental friendliness:

- Hard disks continue running
- Keyboard and mice remain powered

The bazoo Green Hub series helps you save money while simultaneously protecting the environment. The switch integrated in the hub isolates all connected USB devices from the USB power supply if desired.

B-USB 2HUB 4EP

ctn qty. 6 EDP-No. 27188

bazoo GREEN HUB, passive USB design hub with 4 USB ports and switch for complete isolation of all connected USB devices from the USB port.
Comes with USB 2.0 cable.

- USB 2.0 supports data rates of up to 480 Mbps
- Equivalent to USB specifications Rev. 2.0, fully downwards compatible to USB 1.x
- Clever arrangement of all necessary connection combinations to prevent ports from being obstructed by large USB devices:
  - 3 ports on the top of the hub
  - 1 port on the side of the hub
- Rubber feet prevent slipping on the table
- 1.8 m USB 2.0 connection lead
- Packaging: blister in sales display

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux

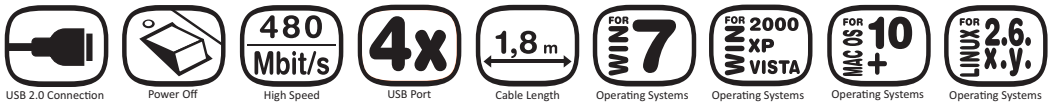

B-USB 2HUB 4EA

ctn qty. 6 EDP-No. 27189

bazoo GREEN HUB, active USB design hub with 4 USB ports and switch for complete isolation of all connected USB devices from the USB port.
Comes with USB 2.0 cable and 2 A switching power adapter.

- USB 2.0 supports data rates of up to 480 Mbps
- Equivalent to USB specifications Rev. 2.0, fully downwards compatible to USB 1.x
- Clever arrangement of all necessary connection combinations to prevent ports from being obstructed by large USB devices:
  - 3 ports on the top of the hub
  - 1 port on the side of the hub
- Rubber feet prevent slipping on the table
- 1.8 m USB 2.0 connection lead
- 1.8 m USB 2.0 connection lead
- 2 A switching power adapter for worldwide operation, independent of mains voltage and frequency
- Packaging: blister in sales display

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux

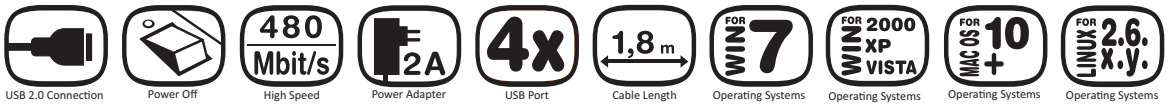

USB 2.0 Hubs

B-USB 2HUB 7EA

ctn qty. 6 EDP-No. 27190

bazoo GREEN HUB, active USB design hub with 7 USB ports and switch for complete isolation of all connected USB devices from the USB port.

Comes with USB 2.0 cable and 2.5 A switching power adapter.

- USB 2.0 supports data rates of up to 480 Mbps
- Equivalent to USB specifications Rev. 2.0, fully downwards compatible to USB 1.x
- Clever arrangement of all necessary connection combinations to prevent ports from being obstructed by large USB devices:
  - 4 ports on the top of the hub
  - 3 ports on the side of the hub
- Rubber feet prevent slipping on the table
- 1.8 m USB 2.0 connection lead
- 2.5 A switching power adapter for worldwide operation, independent of mains voltage and frequency
- Packaging: blister in sales display

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux

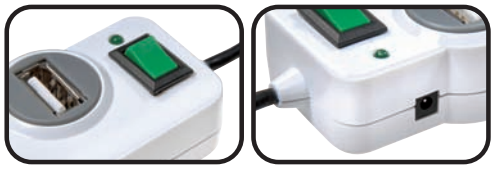

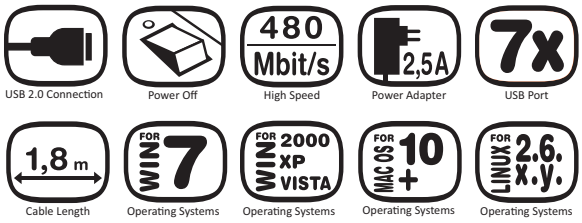

B_USB 2HUB 7QA

ctn qty. 6 EDP-No. 23227

bazoo 7 port USB hub, active QUAD

The bazoo QUAD - Hub is highlighted by its shape, colour and design, which makes it different from mainstre am products. The unique bazoo USB-plug-design with integrated Power Indication Light additionally grades up the product.

- USB 2.0 is compatible with data rates of up to 480 Mbps
- Equivalent to USB specifications Rev. 2.0, fully downwards compatible to USB 1.x
- Includes switching power adapter 5 V, 2.5 A / input voltage 100 V – 240 V for all mains power types
- Cleverly arranged ports for all the required combinations of connections to prevent ports from being blocked by large USB devices:
  - 3 frontside ports
  - 2 ports on top of the hub
  - 2 ports on the backside
- Piano lacquer finish
- Rubber feet prevent slipping on the table
- blue function LED
- 1.8 m USB bazoo removable connection cable
- PIL (Power Indication Light) integrated in plug
- Exclusive bazoo plug connector design
- Plug connector with special coating which is pleasant to the touch
- Packaging: blister in sales display

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux

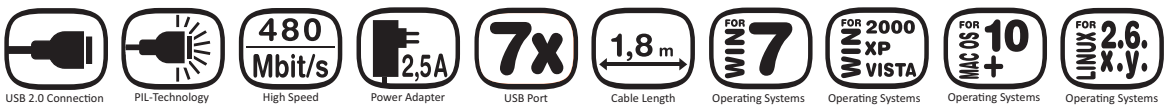

USB 2.0 Hubs

USB2 HUB 7A

ctn qty. 5 EDP-No. 26904* new

USB 2.0 Hub with 7 USB ports, incl. power adapter

Compact 7-port USB 2.0 hub for connecting up to seven USB 2.0 or USB 1.1 devices. With USB 2.0 cable and power adapter.

- Elegant design with 3 USB ports at the front and 2 USB ports at the rear and 2 ports on the top- Supports data rates of up to 480 Mbps
- Meets USB specification Rev. 2.0, fully downward compatible with USB 1.X
- Suitable for all low-speed (1.5 Mbps), full-speed (12 Mbps) and high-speed (480 Mbps) USB devices
- With switching power adapter 5 V, 3.0 A for devices with high power consumption such as USB hard disks
- Wide range of input power 110V - 230V, 50/60Hz for worldwide usage
- Packaging: Stacking blister

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux

USB HUB 4A

ctn qty. 10 EDP-No. 26905* new

USB 2.0 Hub with 4 ports, incl. power adapter

4-port USB-2.0 hub, for connection of up to four USB 2.0 or USB 1.1 devices, including USB cable and mains unit

- 480 MBit/s, 40 x faster than USB 1.1
- Supports data transfer rates: 480 MBit/s, 12 MBit/s and 1.5 MBit/s
- Fully downward compatible with USB 1.1
- Active exchange: peripherals can be connected and disconnected at any time
- Including high-power 5V 2A switching power adapter to operate devices with high current consumption, e.g. USB hard drives
- Package: cardboard box

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux

*With the change to the bazoo packaging, this has a new article number

USB 2.0 Hubs

new **B-USB 2HUB 4 FLP** ctn qty. 5 EDP-No. 27191

bazoo LUGUS FL, USB design hub

The bazoo LUGUS FL USB Hub is the perfect solution for users of mobile computers. It is flat, small, but suitable for big USB devices without blocking any of the ports -> A real 4-port hub!

- USB 2.0 for data rates up to 480 MBit/s
- Equivalent to USB specifications Rev. 2.0, fully downwards compatible to USB 1.x
- Cleverly arranged ports for all the required combinations of connections to prevent ports from being blocked by large USB devices:
  - 3 ports on the front of the hub, of which one can be tilted by 90°
  - 1 port on the side of the hub
- Blue function LED on top
- With special rubber coated surface for better touch
- Rubber feet prevent slipping on the table
- 0.5 m connection cable
- Packaging: blister in sales display

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux



USB2 HUB 4P-A ctn qty. 5 EDP-No. 23446*

USB 2.0 hub with 4 USB ports

USB 2.0 hub with two ports allowing 180° rotation
USB 2.0 hub for up to 4 USB devices. For use with a PC or a notebook

- For USB devices with low power requirement (self-powered mode), e.g. USB mice and devices with their own power adapter
- USB 2.0 chipset
- Compatible with USB 1.0 / 1.1
- Two ports that can be rotate by 180° to prevent the ports from being blocked by bulky USB devices
- Power supply socket for optional power supply
- 1.8 m USB lead
  Dimensions: 105 x 20 x 20 mm
- Function LED
- Packaging: blister

System requirements:
- Computer with USB support (preferably USB 2.0)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux



*With the change to the bazoo packaging, this has a new article number

USB 2.0 Hubs

PRO USB2 HUB 4PN ctn qty. 10 EDP-No. 23225*

Passive USB 2.0 HUB with 4 ports

USB 2.0 hub for connection of up to 4 USB devices for use with a notebook or desktop PC

- For USB devices with low power requirement (self-powered mode), e.g. USB mice and devices with their own power supply
- Compatible with USB 1.0 / 1.1
- Practical recess for storing the connector in the device
- Size only: 95 x 30 x 14.5 mm
- Packaging: blister

System requirements:
- Computer with USB support (preferably USB 2.0)
- USB Port, Microsoft® Windows® 98SE, ME, 2000, XP or Vista, MAC OS 9.x+ and Linux

USB 2.0 Card Readers

RW UNI 6S ctn qty. 5 EDP-No. 28363* new

Universal Card Reader

Universal card reader for reading and writing of most common [1] memory cards. Thanks to the fast USB 2.0 (interface supports up to 480 Mbps) maximum reading and writing speeds are achieved. No adapter is required for most [1] memory cards.

- 6 universal card slots
- Even for high capacity cards
- Special surface coating for optimum grip
- Incl. USB connention cable

System requirements:
- Computer with USB support (USB 2.0 is required for maximum data transfer rates)
- Microsoft® Windows® 2000, XP, Vista or Win 7, MAC OS 10.x+ or Linux minimum Kernel 2.6.x.y,

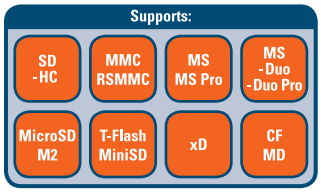

[1] Supports following cards:

CF-Slot:
CF I / CF I Pro / CF I Pro II / CF I Elite Pro / CF I Ultra II / CF I Ultra X / CF I Extreme / CF I Extreme III / CF I Extreme IV / CF I 40X HS/WA / CF I 80 WA / CF I 133 WA / Shoot&store CF / CF II / CF II Micro Drive / CF II Magicstor / CF II Ultimate / CF-Digital Film / CF-Premium Memory / CF Industrial

xD-Slot:
XD / XD M / XD H / XD-Digital Film / XD-Premium Memory / XD Picture Card / Shoot&store

MS-Slot:
MS / MS PRO / MS MG / MS PRO MG HIGH SPEED / MS PRO MG Extreme III / MS Duo / MS PRO Duo MG Ultra II / MS PRO Duo MG HIGH SPEED / MS PRO MG / MS Duo MG / MS PRO DUO MG / MS SELECT FUNCTION / MS PRO DUO / MS ROM / Shoot&store MS / Gaming PRO DUO / MS PRO DUO MG Mobile Ultra II

SD-Slot:
SD / SD HIGH Capacity (Class 2) / SD HIGH Speed (Class 4) / SD Ultra / SD Elite Pro / SD Ultra II / SD Ultra II Plus / SD Extreme / SD Extreme III / SD Ultimate / SD HIGH Capacity (Class 6) / Shoot&store SD / Gaming SD / SD 40X / SD 60X / SD 80X / SD 133X / SD 150X / MMC / MMC 4.0 / MMC Mobile / MMC PLUS 200X / RS-MMC** / RS-MMC 4.0** / DV RS-MMC** / MMC PLUS / Mini-SD** / Mini SD 80X** / Mini-SDHC 16GB** / Ultra II Mobile Mini-SD / Mini SD 80X** / SD HIGH Speed (Class 8)

Micro-SD-Slot:
Micro-SD (Transflash) / Micro-SD 80X / Ultra II Mobile Micro SD / MMC MICRO / Micro SDHC / MMC Micro

M2-Slot:
MS Micro (M2) / M2 Ultimate version

** Adapter needed

*With the change to the bazoo packaging, this has a new article number

Connectivity

USB 2.0 Cardreaders

new **RW UNI 6S PH** ctn qty. 5 EDP-No. 28364*

Universal Photo Card Reader

vivanco

Universal card reader for reading and writing of most common [1] memory cards.
Thanks to the fast USB 2.0 (interface supports up to 480 Mbps) maximum reading and writing speeds are achieved. No adapter is required for most [1] memory cards.

- 6 universal card slots
- Even for high capacity cards
- Incl. USB connention cable

System requirements:
- Computer with USB support (USB 2.0 is required for maximum data transfer rates)
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10 or Linux



[1] Supports following cards:

CF-Slot:
CF I / CF I Pro / CF I Pro II / CF I Elite Pro / CF I Ultra II / CF I Ultra X / CF I Extreme / CF I Extreme III / CF I Extreme IV / CF I 40X HS/WA / CF I 80 WA / CF I 133 WA / Shoot&store CF / CF II / CF II Micro Drive / CF II Magicstor / CF II Ultimate / CF-Digital Film / CF-Premium Memory / CF Industrial

xD-Slot:
XD / XD M / XD H / XD-Digital Film / XD-Premium Memory / XD Picture Card / Shoot&store

MS-Slot:
MS / MS PRO / MS MG / MS PRO MG HIGH SPEED / MS PRO MG Extreme III / MS Duo / MS PRO Duo MG Ultra II / MS PRO Duo MG HIGH SPEED / MS PRO MG / MS Duo MG / MS PRO DUO MG / MS SELECT FUNCTION / MS PRO DUO / MS ROM / Shoot&store MS / Gaming PRO DUO / MS PRO DUO MG Mobile Ultra II

SD-Slot:
SD / SD HIGH Capacity (Class 2) / SD HIGH Speed (Class 4) / SD Ultra / SD Elite Pro / SD Ultra II / SD Ultra II Plus / SD Extreme / SD Extreme III / SD Ultimate / SD HIGH Capacity (Class 6) / Shoot&store SD / Gaming SD / SD 40X / SD 60X / SD 80X / SD 133X / SD 150X / MMC / MMC 4.0 / MMC Mobile / MMC PLUS 200X / RS-MMC** / RS-MMC 4.0** / DV RS-MMC** / MMC PLUS / Mini-SD** / Mini SD 80X** / Mini-SDHC 16GB** / Ultra II Mobile Mini-SD / Mini SD 80X** / SD HIGH Speed (Class 8)

Micro-SD-Slot:
Micro-SD (Transflash) / Micro-SD 80X / Ultra II Mobile Micro SD / MMC MICRO / Micro SDHC / MMC Micro

M2-Slot:
MS Micro (M2) / M2 Ultimate version

** Adapter needed

new **RW UNI 4S** ctn qty. 5 EDP-No. 28365*

Mobile Universal Card Reader

vivanco

Universal card reader for reading and writing of most common 1) memory cards.
Thanks to the fast USB 2.0 (interface supports up to 480 Mbps) maximum reading and writing speeds are achieved. No adapter is required for most 1) memory cards.

- 4 universal card slots
- Compact design, ideal for on the move
- Pluggable, integrated USB connector with flexible connecting cable



[1] Supports following cards:

SD-Slot:
SD / SD HIGH Capacity (Class 2) / SD HIGH Speed (Class 4) / SD Ultra / SD Elite Pro / SD Ultra II / SD Ultra II Plus / SD Extreme / SD Extreme III / SD Ultimate / SD HIGH Capacity (Class 6) / Shoot&store SD / Gaming SD / SD 40X / SD 60X / SD 80X / SD 133X / SD 150X / MMC / MMC 4.0 / MMC Mobile / MMC PLUS 200X / RS-MMC** / RS-MMC 4.0** / DV RS-MMC** / MMC PLUS / Mini-SD / Mini SD 80X / Mini-SDHC 16GB / Ultra II Mobile Mini-SDMMC II / Mini SD 80X** / SD HIGH Speed (Class 8)

Micro-SD-Slot:
Micro-SD (Transflash) / Micro-SD 80X / Ultra II Mobile Micro SD / MMC MICRO / Inand 8GB/32GB / Micro SDHC / MMC Micro

MS-Slot:
MS / MS PRO / MS MG / MS PRO MG HIGH SPEED / MS PRO MG Extreme III / MS Duo / MS PRO Duo MG Ultra II / MS PRO Duo MG HIGH SPEED / MS PRO MG / MS Duo MG / MS PRO DUO MG / MS SELECT FUNCTION / MS PRO DUO / MS ROM / Shoot&store MS / Gaming PRO DUO / MS PRO DUO MG Mobile Ultra II

M2-Slot:
MS Micro (M2) / M2 Ultimate version

** Adapter needed

*With the change to the bazoo packaging, this has a new article number

USB 2.0 Cardreaders

RW UNI 5S SIM ctn qty. 5 EDP-No. 28366 new

Mobile Universal SIM Card Reader

SIM card reader for reading and writing many common [2] memory cards.
The enclosed software enables editing of data (e.g. contact data, SMS etc.) from SIM mobile phone cards, for copying the data from one SIM to another or to back up the data on a computer.
Thanks to the fast USB 2.0 (supports up to 480 Mbps) maximum reading and writing speeds are achieved. No adapter is required for most [2] memory cards.

- 5 universal card inserts
- SIM card slot for mobile phone cards
- Compact design, ideal for on the move
- Pluggable, integrated USB connector with flexible connecting cable



[2] Supports following cards:

SD-Slot:
SD / SD HIGH Capacity (Class 2) / SD HIGH Speed (Class 4) / SD Ultra / SD Elite Pro / SD Ultra II / SD Ultra II Plus / SD Extreme / SD Extreme III / SD Ultimate / SD HIGH Capacity (Class 6) / Shoot&store SD / Gaming SD / SD 40X / SD 60X / SD 80X / SD 133X / SD 150X / MMC / MMC 4.0 / MMC Mobile / MMC PLUS 200X / RS-MMC** / RS-MMC 4.0** / DV RS-MMC** / MMC PLUS / Mini-SD / Mini SD 80X / Mini-SDHC 16GB / Ultra II Mobile Mini-SDMMC II / Mini SD 80X** / SD HIGH Speed (Class 8)

Micro-SD-Slot:
Micro-SD (Transflash) / Micro-SD 80X / Ultra II Mobile Micro SD / MMC MICRO / Inand 8GB/32GB / Micro SDHC / MMC Micro

MS-Slot:
MS / MS PRO / MS MG / MS PRO MG HIGH SPEED / MS PRO MG Extreme III / MS Duo / MS PRO Duo MG Ultra II / MS PRO Duo MG HIGH SPEED / MS PRO MG / MS Duo MG / MS PRO DUO MG / MS SELECT FUNCTION / MS PRO DUO / MS ROM / Shoot&store MS / Gaming PRO DUO / MS PRO DUO MG Mobile Ultra II

M2-Slot:
MS Micro (M2) / M2 Ultimate version

SIM-Slot:
SIM cards after about 22008. The relevant provider can provide details about compatibility.
** Adapter needed

USB 2.0 Interface

IO 4+1 USB2 ctn qty. 5 EDP-No. 23418*

PCI -> USB 2.0 card 4+1 port

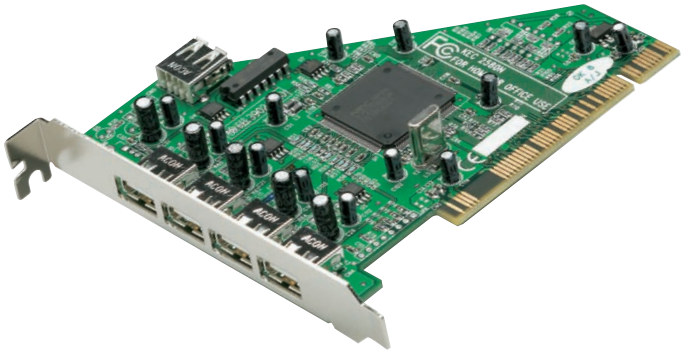

The high-speed USB controller card provides a USB 2.0 standard interface. This USB controller supports all USB devices and high-speed USB data rates.

- Supports maximum data rates of 480 Mbps (40 times faster than USB 1.1)
- Meets USB specification Rev. 2.0
- Downward compatible with USB 1.1
- 4 external and 1 internal downstream (type A) ports
- Supports Plug & Play standard
- Package: blister
- Suitable for all low-speed (1.5 Mbps), full-speed (12 Mbps) and high-speed (480 Mbps) USB devices

System requirements:
- Computer with PCI slot rev. 2.2 or kompatibel
- Microsoft® Windows® 2000, XP, Vista or Win 7

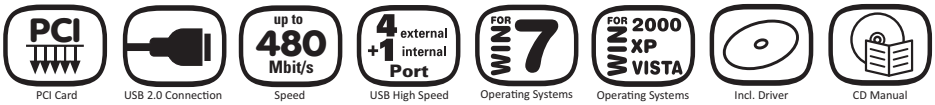

*With the change to the bazoo packaging, this has a new article number

Connectivity

Bluetooth®

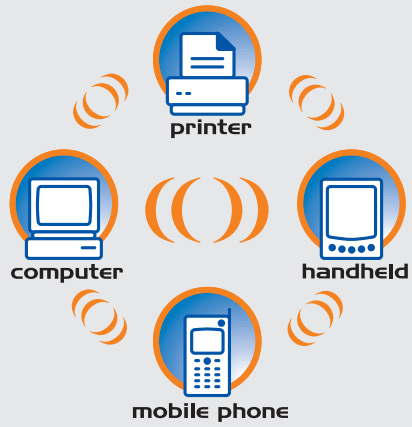

What is Bluetooth® V 3.0 EDR?

Bluetooth® V 3.0 Enhanced Data Rate is the latest version of the Bluetooth® standard.

The most important new features:

- **Low power consumption**
  -> Longer operation time for mobile devices
- **Simple connection via Near Field Communication**
  -> High ease of use, simple operation

The 3.0 standard is fully compatible with older devices with versions 1.1, 1.2, 2.0 and 2.1.

Bluetooth®

New / Neu / Nouveau
Version v3.0 + EDR
Compatible with Bluetooth® v2.x EDR, v1.x

new **BT3.0 USB C1 EDR** ctn qty. 5 EDP-No. 28358

USB Bluetooth® v3.0 + HS Adapter Class 1

Provides a connection from a computer to the wireless Bluetooth® world. The extremely compact Vivanco USB dongle is the ultimate solution for a quick and easy wireless link between PCs and Bluetooth®-compatible devices such as mobile phones, printers, headphones etc.

Features:
- Latest Bluetooth® Version V3.0 with HS (HighSpeed data rate)
- Full downward compatibility with V1.1, v1.2, v2.0 + EDR, v2.1 + EDR
- True Bluetooth® Class 1 product with a range of up to 100 m
- Worldwide standardized 2.4 GHz radio standard
- High data security through encryption and authentication
- Wireless access to networks / Internet without cable via Bluetooth® mobile phones
- Incl. convenient Broadcom® Management Software for managing the Bluetooth® PAN (Personal Area Network) and communication between the Bluetooth® compatible devices
- Includes quick guide and extensive manual on CD
- Packaging: blister

System requirements:
- Computer with USB support
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10.2 and higher

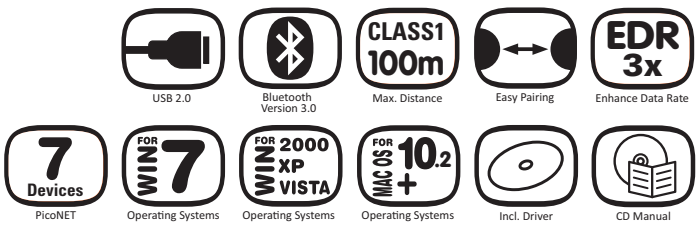

Bluetooth®

BT3.0 USB C2 EDR

ctn qty. 5 EDP-No. 28357 new

USB Bluetooth® v3.0 Adapter Class 2

Provides a connection from a computer to the wireless Bluetooth® world. The extremely compact Vivanco USB dongle is the ultimate solution for a quick and easy wireless link between PCs and Bluetooth®-compatible devices such as mobile phones, printers, headphones etc.

Features:
- Latest Bluetooth® Version V3.0 with HS (HighSpeed data rate)
- Full downward compatibility with V1.1, v1.2, v2.0 + EDR, v2.1 + EDR
- True Bluetooth® Class 2 product with a range of up to 20 m
- Worldwide standardized 2.4 GHz radio standard
- High data security through encryption and authentication
- Wireless access to networks / Internet without cable via Bluetooth® mobile phones
- Incl. convenient Broadcom® Management Software for managing the Bluetooth® PAN (Personal Area Network) and communication between the Bluetooth® compatible devices
- Includes quick guide and extensive manual on CD
- Packaging: blister

New / Neu / Nouveau
Version v3.0 + EDR
Compatible with Bluetooth® v2.x EDR, v1.x

System requirements:
- Computer with USB support
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10.2 and higher

Connectivity

BT2.1 USB C1 EDR

ctn qty. 5 EDP-No. 25711*

USB Bluetooth Dongle V2.1 EDR Class 1

Provides a high speed connection from a computer to the wireless Bluetooth® world. The Vivanco USB Dongle V2.1 is the ultimate solution if you want to link easily and quickly your PC with Bluetooth®-compatible devices such as PDAs, mobile phones, printers, etc.

- Newest Bluetooth® Version V2.1 with EDR (Enhanced Data Rate)
- Data transmission rates of up to 3 Mbps (3 times faster than BT 1.X), 2.4 GHz
- Real Bluetooth® Class 1 product with a range of up to 100 m
- The included Bluetooth® software by TOSHIBA offers best support for all current BT profiles
- High data security through encryption and authentification
- Simple and quick pairing thanks NFC technology (Near Field Communication)

New / Neu / Nouveau
Version v2.1 + EDR
Compatible with Bluetooth® v2.0+EDR, v1.2, v1.1

Highlights of new Bluetooth® Version 2.1:
- Easiest and automatical pairing of devices (compatible BT V2.1 devices only need to be in a near field)
- Less power cosumption by factor 5 (best for notebook user!)
- Fully compatible to BT V1.1 and V2.0
- Packaging: blister incl quick start guide and manual on CD
- Shipment in retail display carton (refer to photo) when taking packaging unit of 5

System requirements:
- Computer with USB 1.1/2.0 support
- Microsoft® Windows® 2000, XP, Vista, MAC OS 10.2+

*With the change to the bazoo packaging, this has a new article number

Connectivity

Bluetooth®

vivanco

Bluetooth®

New / Neu / Nouveau
Version v2.1 + EDR
Compatible with Bluetooth® v2.0+EDR, v1.2, v1.1

PRO BT2.1 USB C2 ctn qty. 5 EDP-No. 26916*

USB Bluetooth® Dongle V2.1 EDR Class 2

The extremely compact Vivanco USB dongle is the ultimate product for a quick and easy wireless link between PCs and Bluetooth® compatible devices such as PDAs, mobile phones and printers etc. Due to its compact design it can remain in the USB port of the notebook during transport.

- Latest Bluetooth® Version V 2.1 with EDR (Enhanced Data Rate)
- Full downward compatibility with V 1.1, V 1.2, V 2.0 + EDR
- True Bluetooth® Class 2 product with a range of up to 20 m
- Weltweit einheitlicher 2,4 GHz Funkstandard
- Hohe Datensicherheit durch Verschlüsselung und Authentifizierung
- Worldwide standardized 2.4 GHz radio standard
- High data security through encryption and authentication
- Wireless access to networks / Internet without cable via Bluetooth® mobile phones or Access Points
- Includes quick guide and extensive manual on CD
- Packaging: blister

System requirements:
- Computer with USB support
- Microsoft® Windows® 2000. XP, Vista, Win 7, Macintosh® OS 10.2 and higher

BT2.1 USB C2 EDR ctn qty. 5 EDP-No. 25712*

USB Bluetooth® V 2.1 Adapter Class 2

Including Toshiba Bluetooth software to extend the range of functions
Supports stereo music transmission and remote control functions

Others

vivanco

HEAT PASTE ctn qty. 5 EDP-No. 23451*

Thermal Compound , 3 g

Vivanco's HEATPASTE thermal paste is produced using an outstanding nano technology-based manufacturing technique and thus ideally suited for balancing out any unevenness between CPUs and heat sinks. The nano grease can also be used on graphic cards for better thermal conductivity between the GPU (graphic processor unit) and the heat sink.

- High thermal conductivity
- Ideally suited for use on CPUs and GPUs
- Thermal Conductivity 4.5 W/m-K
- Thermal Impedance 0.205° C - in 2/W
- Operation Temperture -50 ~ 240° C
- Net weight: 3 g
- With spatula for spreading the thermal paste
- Silicone Compounds 50 %
- Carbon Compounds 30 %
- Metal Oxide Compounds 20 %

*With the change to the bazoo packaging, this has a new article number

Security

NBK Lock ctn qty. 5 EDP-No. 23240*

Notebook security lock

In spite of its low weight extremely safe chain lock for securing valuable notebooks or beamers at the work place or when travelling.

- Sling loop around a table-leg, for example, and secure the lock insert on the unit
- No universal key but code system
- Weight only approx. 120 g

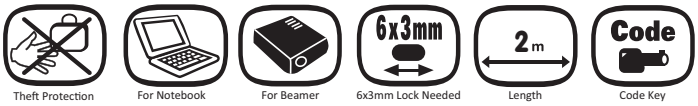

NBK LOCK CODE ctn qty. 5 EDP-No. 26277 new

Notebook Code Lock

Despite its light weight a highly secure chain lock for securing valuable notebooks or video projectors at work or on the road. The sling is e.g. wrapped around the table leg and the lock secured to the device ("Kensington Lock").
The 4-digit code allows 10.000 combinations to choose from and therefore offers the same security level as e.g. PIN numbers of banking cards. The light weight of only 190g makes this lock a good companion for travelling.

- Steel cable with a length of approx. 1.8 m
- Thickness approx. 4 mm
- 4-digit safety code, can be adjusted by the user
- For all device locks with 6x 3 mm size ("Kensington Lock")

Peripherals

NBK SNAKE2 ctn qty. 5 EDP-No. 23249*

Handy workplace illumination for notebooks

- Provides spot illumination without disturbing anyone, ideal in darkened trains and airplanes
- Operates off the USB port
- Low power consumption due to LED technology
- Highly flexible swan neck for optimum focusing
- Weight: approx. 60 g
- Package: blister package

System requirements:
- USB port for power supply

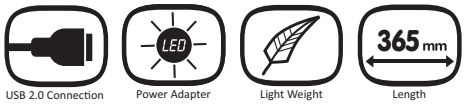

Computer Connections

The wide and profound range of perfectly matching high quality accessory products is characterised by an outstanding product and service expertise. Contemporaneously, Vivanco is not just offering highly innovative products, but also a complete range of concerted products. Quality plays the key role. High quality is guaranteed by perfect quality development.
A detailed information system on the Internet and a professional telephone hotline is available should any questions arise when using a Vivanco product. Because of the coordinated range, Vivanco does not just offer products but rather a complete concept. Ideal solutions for intelligent presentations can be selected from the full range which can be placed strategically and clearly at the POS.

Overview computer cables

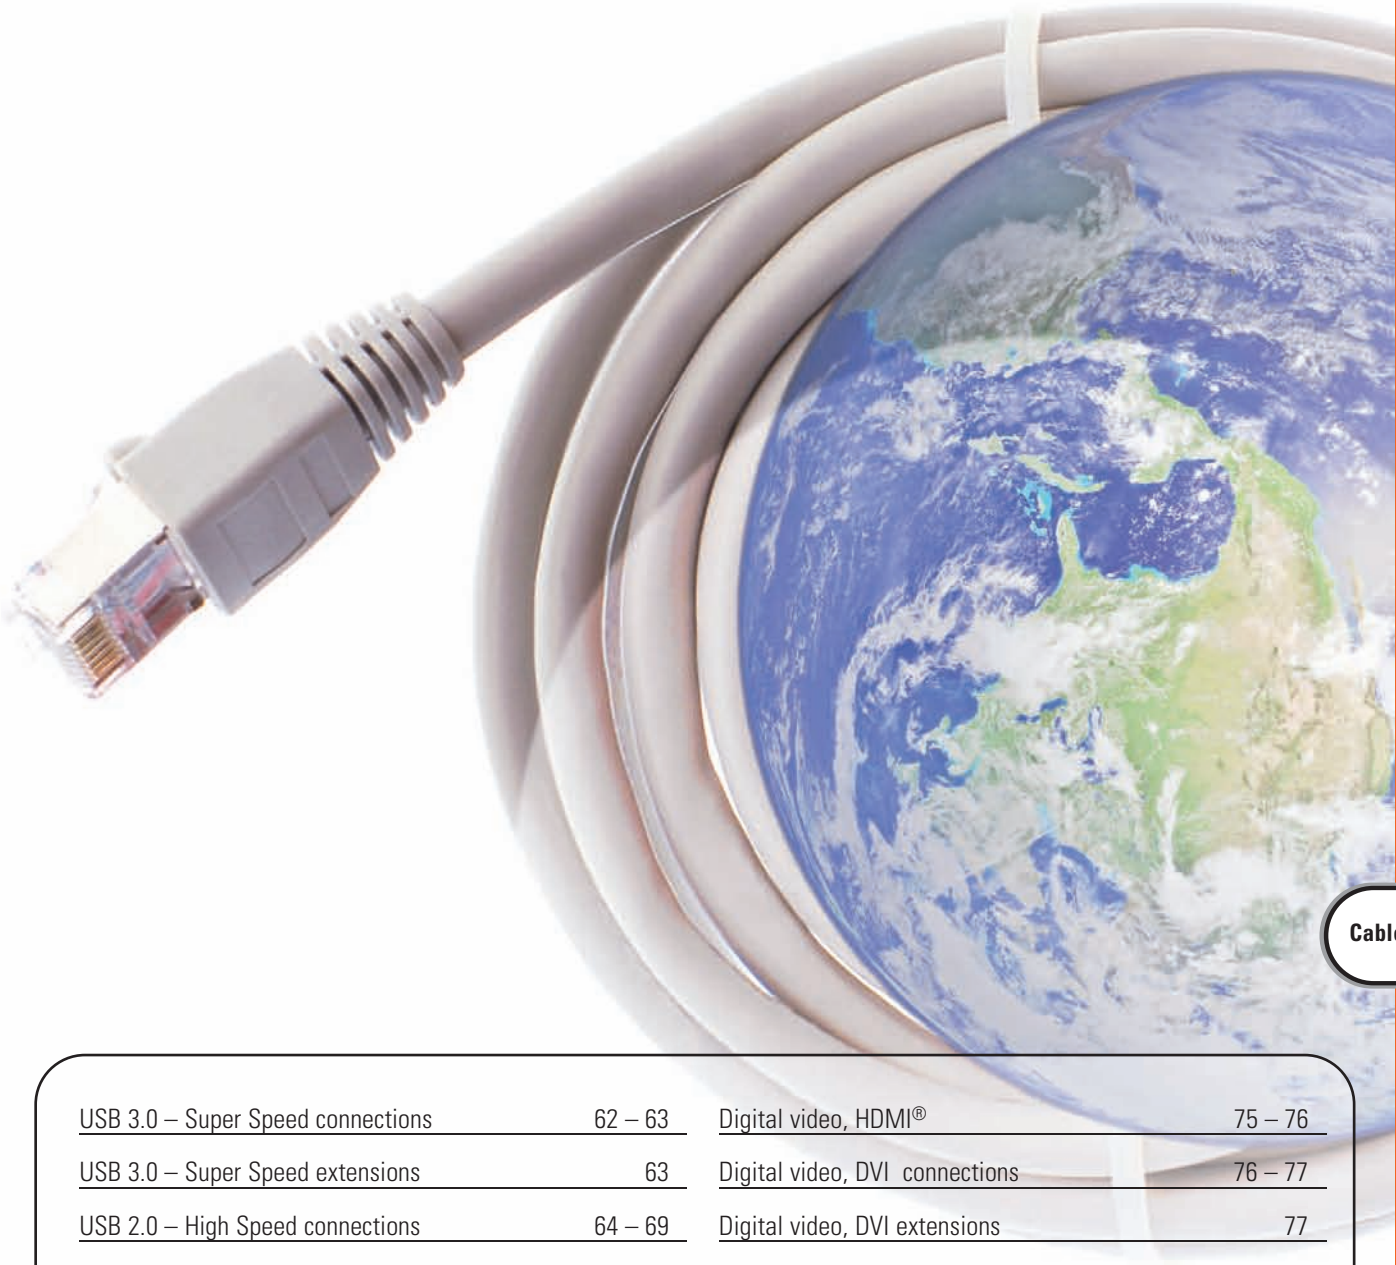

USB 3.0 – Super Speed connections	62 – 63	Digital video, HDMI®	75 – 76
USB 3.0 – Super Speed extensions	63	Digital video, DVI connections	76 – 77
USB 2.0 – High Speed connections	64 – 69	Digital video, DVI extensions	77
USB 2.0 – High Speed extensions	69	Digital video, DisplayPort	77
USB cables – "On-the-go"	70	Monitor connections and extensions	78 – 79
USB adapters	71	Monitor adapters	79
IEEE 1394 cables	72 – 73	PC audio / video	80 – 81
Cat 6 network cables	73	PC internal	81 – 83
Cat 6 crossover network cables	73	Online	83
Cat 5e network cables	74	Keyboard / mouse	83
Cat 5e crossover network cables	74	Universal cables and adapters	84
Network adapters / installation	75	Power	85

USB 3.0 – SuperSpeed connections

Under the name "Super Speed" the new USB Version 3.0 has now become established as the successor to the previously widespread USB 2.0 standard. The essential advantages of the new USB standard include a high data transfer rate and an optimised power supply.
In contrast to the USB 2.0 standard ("High Speed") with transfer rates of 480 Mbit/sec, as "Super Speed", USB 3.0 has a transfer rate of 5 Gbit/sec in full duplex mode and therefore a tenfold increase in transfer rate compared with USB 2.0.

As with conventional USB cables, the power supply to peripheral devices can be made via the USB cable. However, the maximum current has been increased from 500 mA to 900 mA.
Because of the additional pair of conductors in the USB 3.0 cable, the plugs are also different to conventional USB plugs.

The Type A plugs have the same structure, but a wider contact level with five adjacent contacts behind the contact level of the 2.0 plug. These contacts are only activated if the A plug is plugged in as far as the stop.

With the type B plug, the difference can be seen from the outside. This has an upper section above the USB 2.0 plug. This upper section accommodates the five additional contacts for USB 3.0.

The most common USB 3.0 plug types

USB 3.0 type A



USB 3.0 type B



USB 3.0 type micro-B



USB 3.0 type A socket

USB 3.0 connections type A <-> Typ B

CC U8 18 3	1.8 m	ctn qty. 5	EDP-No. 45270	new
CC U8 30 3	3.0 m	ctn qty. 5	EDP-No. 45271	new
CC U8 50 3	5.0 m	ctn qty. 5	EDP-No. 45272	new

High quality certified USB 3.0 connection cable
USB 3.0 type A plug <-> USB 3.0 type B plug

- To connect PCs / laptops with USB 3.0 peripheral devices e.g. printers, scanners etc.
- Approved according to USB 3.0 standard
- SuperSpeed, up to 5 Gbit/sec transfer rate (tenfold increase in data transfer rate compared with USB 2.0 !!!)
- Enables a power supply of max. 900 mA.
- High quality shielding

USB 3.0 connections type A <-> type micro B

CC U8 18 MC 3	1.8 m	ctn qty. 5	EDP-No. 45278	new

High quality certified USB 3.0 connection cable
USB 3.0 type A plug <-> USB 3.0 type micro B plug

- To connect PCs / laptops with USB 3.0 micro B type interfaces
- Approved according to USB 3.0 standard
- SuperSpeed, up to 5 Gbit/sec transfer rate (tenfold increase in data transfer rate compared with USB 2.0 !!!)
- Enables a power supply of max. 900 mA.
- High quality shielding

USB 3.0 extensions

CE U8 20 3	2.0 m	ctn qty. 5	EDP-No. 45275	new
CE U8 30 3	3.0 m	ctn qty. 5	EDP-No. 45276	new

High quality certified USB 3.0 extension cable
USB 3.0 type A plug <-> USB 3.0 type A socket

- For the extension of existing cable or for the comfortable connection of terminal equipment with USB 3.0 type A interfaces.
- Approved according to USB 3.0 standard
- SuperSpeed, up to 5 Gbit/sec transfer rate (tenfold increase in data transfer rate compared with USB 2.0 !!!)
- Enables a power supply of max. 900 mA.
- High quality shielding

Computer Connections

USB 2.0 – HighSpeed connections

Vivanco supplies the USB 2.0 standard in the USB range for data transfer rates of up to 480 Mbs. All cables and adapters are downwards compatible with USB 1.1. Printers, scanners, webcams, HUBs, mice, keyboards and other newerdevices , such as USB sticks or USB dongles, can be connected simply and easily during operation, known as hot plugging, USB is being used increasingly to replace older serial and parallel connections.

The plugs of a USB cable were designed in such a way that they cannot be confused or connected with the poles reversed.

The USB cable contains 4 wires. Two wires transfer the data. The other two wires supply the connected device with 5 volts. According to the USB specification devices of up to 500 mA can be supplied via USB. Devices with power consumption of up to 2.5 W, e.g. simple HUBs and external mini hard drives can therefore be supplied via the bus.

The most common USB 2.0 plug types



USB type A



USB type B

USB type mini B



USB type A socket

USB type micro A



USB type B socket

USB type micro B

USB 2.0 connections for digital camera

The USB 2.0 cables for connecting digital cameras to the computer or notebook are characterised by authenticity. The cables are available with ferrite core, just like original cables, and thus ensure an interference-free signal.

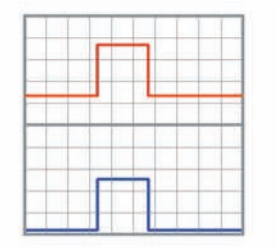

Digital signal flow with ferrite core

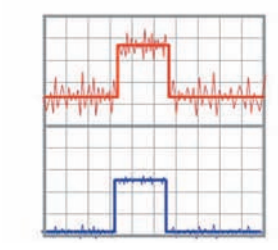

Digital signal flow without ferrite core

CC U 15 D2 1.5 m ctn qty. 5 EDP-No. 45241

High-grade USB 2.0 connection cable for digital cameras
USB type A plug <-> USB mini B plug (5-pin)

- For connecting PCs / laptops to a digital camera or camcorder, for instance
- A special feature is the ferrite core to prevent interference
- Suitable for Sony, Olympus, Canon....
- High speed data transfer rate of up to 480 Mbs

CC U 15 D3 1.5 m ctn qty. 5 EDP-No. 45242

High-grade USB 2.0 connection cable for digital cameras
USB type A plug <-> USB mini B plug (8-pin)

- For connecting PCs / laptops to a digital camera or camcorder, for instance
- A special feature is the ferrite core to prevent interference
- Suitable for Canon, Nikon, Pentax....
- High speed data transfer rate of up to 480 Mbs

CC U 15 D4 1.5 m ctn qty. 5 EDP-No. 45243

High-grade USB 2.0 connection cable for digital cameras
USB type A plug <-> USB mini B plug (8-pin)

- For connecting PCs / laptops to a digital camera or camcorder, for instance
- A special feature is the ferrite core to prevent interference
- Suitable for Nikon, Pentax, Panasonic....
- High speed data transfer rate of up to 480 Mbs

USB 2.0 connections type A <-> type B

The USB range is characterised by the clear price and quality scheme.
The Vivanco range has the right cable for every need.

CC U7 18	1.8 m	ctn qty. 5	EDP-No. 45200
CC U7 30	3.0 m	ctn qty. 5	EDP-No. 45201
CC U7 50	5.0 m	ctn qty. 5	EDP-No. 45202

High-grade USB 2.0 certified connection cable
USB type A plug <-> USB type B plug

- For connecting PCs / laptops to periphery devices, e.g. printers, scanners etc.
- A special feature is the ferrite core to prevent interference
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference
- High speed data transfer rate of up to 480 Mbs

CC U6 18	1.8 m	ctn qty. 5	EDP-No. 45210
CC U6 30	3.0 m	ctn qty. 5	EDP-No. 45211
CC U6 50	5.0 m	ctn qty. 5	EDP-No. 45212

High-grade USB 2.0 certified connection cable
USB type A plug <-> USB type B plug

- For connecting PCs / laptops to periphery devices, e.g. printers, scanners etc.
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference
- High speed data transfer rate of up to 480 Mbs

CC U5 18	1.8 m	ctn qty. 5	EDP-No. 45221
CC U5 30	3.0 m	ctn qty. 5	EDP-No. 45230

USB 2.0 compatible connection cable
USB type A plug <-> USB type B plug

- For connecting PCs / laptops to periphery devices, e.g. printers, scanners etc.
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

CC U4 18	1.8 m	ctn qty. 5	EDP-No. 45206
CC U4 30	3.0 m	ctn qty. 5	EDP-No. 45223

USB 2.0 compatible connection cable
USB type A plug <-> USB type B plug

- For connecting PCs / laptops to periphery devices, e.g. printers, scanners etc.
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

USB 2.0 connections type A <-> type mini B

CC U7 18 M 1.8 m ctn qty. 5 EDP-No. 45203
CC U7 30 M 3.0 m ctn qty. 5 EDP-No. 45204

High-grade USB 2.0 certified connection cable
USB type A plug <-> USB type mini B plug

- For connecting the PC / laptop to periphery devices, e.g. HUBs, digital cameras, MP3 players, with a mini USB connection
- A special feature is the ferrite core to prevent interference
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference
- High speed data transfer rate of up to 480 Mbs

CC U6 18 M 1.8 m ctn qty. 5 EDP-No. 45213
CC U6 30 M 3.0 m ctn qty. 5 EDP-No. 45214

High-grade USB 2.0 certified connection cable
USB type A plug <-> USB type mini B plug

- For connecting the PC / laptop to periphery devices, e.g. HUBs, digital cameras, MP3 players, with a mini USB connection
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference
- High speed data transfer rate of up to 480 Mbs

CC U5 18 M 1.8 m ctn qty. 5 EDP-No. 45231

USB 2.0 certified connection cable
USB type A plug <-> USB type mini B plug

- For connecting the PC / laptop to periphery devices, e.g. HUBs, digital cameras, MP3 players, with a mini USB connection
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

CC U4 18 M 1.8 m ctn qty. 5 EDP-No. 45224

USB 2.0 certified connection cable
USB type A plug <-> USB type mini B plug

- For connecting the PC / laptop to periphery devices, e.g. HUBs, digital cameras, MP3 players, with a mini USB connection
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

USB 2.0 connections type A <-> type mini B

CC U 12 R 1.2 m ctn qty. 5 EDP-No. 45260

USB 2.0 reel

USB type A plug <-> USB type mini B plug

- For connecting the PC / laptop to periphery devices, e.g. HUBs, digital cameras, MP3 players, with a mini USB connection
- Rolls itself up with a gentle pull on both ends of the cable
- Smallest design especially for mobile use
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

USB 2.0 connections type A <-> type micro B

CC U6 18 MC1 1.8 m ctn qty. 5 EDP-No. 45217

High-grade USB 2.0 certified connection cable

USB type A plug <-> USB type micro B plug

- For connecting the PC / laptop to periphery devices, e.g. mobile telephones, PDAs, digital cameras with a mini USB connection.
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference.
- High speed data transfer rate up to 480 Mbs

CC U6 18 MC2 1.8 m ctn qty. 5 EDP-No. 45218

USB 2.0 certified connection cable

USB type micro A plug <-> USB type micro B plug

- For connecting two periphery devices e.g. mobile telephones, PDAs, digital cameras with a micro USB connection.
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference.
- High speed data transfer rate up to 480 Mbs

USB 2.0 extensions

CE U7 20 2.0 m ctn qty. 5 EDP-No. 45205
CE U7 30 3.0 m ctn qty. 5 EDP-No. 45220

High-grade USB 2.0 certified extension cable
USB type A plug <-> USB type A socket

- For the extension of existing cable or for the comfortable connection of terminal equipment with USB type A interfaces
- A special feature is the ferrite core to prevent interference
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference
- High speed data transfer rate of up to 480 Mbs

CE U6 20 2.0 m ctn qty. 5 EDP-No. 45215
CE U6 30 3.0 m ctn qty. 5 EDP-No. 45216

High-grade USB 2.0 certified extension cable
USB type A plug <-> USB type A socket

- For the extension of existing cable or for the comfortable connection of terminal equipment with USB type A interfaces
- Certified in line with the USB 2.0 standard
- With gold contacts, for data transfer with the lowest possible levels of interference
- High speed data transfer rate of up to 480 Mbs

CE U5 08 0.75 m ctn qty. 5 EDP-No. 45222
CE U5 18 1.8 m ctn qty. 5 EDP-No. 45232

USB 2.0 compatible extension cable
USB type A plug <-> USB type A socket

- For the extension of existing cable or for the comfortable connection of terminal equipment with USB type A interfaces
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

CE U 15 1 1.5 m ctn qty. 5 EDP-No. 45261

High-grade USB 2.0 compatible extension station
USB type A plug <-> USB type A socket

- For the extension of existing cable or for the comfortable connection of terminal equipment with USB type A interfaces
- A special feature is the self-adhesive Velcro tape on the underside which makes it easy to connect and disconnect USB devices with just one hand
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

USB cables – USB “on-the-go”

USB “on-the-go” (OTG) facilitates direct communication between different OTG-compatible devices, e.g. various digital cameras, USB sticks and printers. A computer or laptop, which usually assumes the host function, is not required. With USB OTG one of the terminal devices assumes a limited host function and data can be exchanged between the devices. USB “on-the-go” therefore provides useful support, especially in the area of mobile applications. Pictures can easily be printed out on a corresponding printer directly from the digital camera or transferred to a USB storage medium to restore memory capacity on the digital camera. Another option is the direct exchange of music data between MP3 players.

In some cases there may be instances of incompatibility between devices from different manufacturers.

CC U 18 01 1.8 m ctn qty. 5 EDP-No. 45250
USB 2.0 “on-the-go” cable
USB type mini A plug <-> USB type mini B plug

- For directly connecting two “on-the-go” compatible devices, e.g. digital cameras, MP3 players, PDA, mobile telephones
- Data transfer without a PC
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

CC U 18 02 1.8 m ctn qty. 5 EDP-No. 45251
USB 2.0 “on-the-go” cable
USB type mini A plug <-> USB type B plug

- For directly connecting two “on-the-go” compatible devices, e.g. digital cameras, MP3 players, PDA, mobile telephones
- Data transfer without a PC
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

CC U 18 03 1.8 m ctn qty. 5 EDP-No. 45252
USB 2.0 “on-the-go” cable
USB type mini A plug <-> USB type A socket

- For directly connecting two “on-the-go” compatible devices, e.g. digital cameras, MP3 players, PDA, mobile telephones
- Data transfer without a PC
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

USB adapters

CA U 1 ctn qty. 5 EDP-No. 45262

High-grade USB 2.0 compatible adapter
USB type A socket <-> USB type A socket

- Compact adapter for linking two USB cables
- Fully shielded adapter housing
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

CA U 2 ctn qty. 5 EDP-No. 45263

USB 2.0 compatible compact adapter
USB type A socket <-> USB type B socket

- Compact adapter for linking two USB cables
- Fully shielded adapter housing
- Compatible with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs

CA U P1 ctn qty. 5 EDP-No. 45264

High-grade USB 2.0 compatible adapter
USB type A socket <-> PS/2 plug

- Adapter for keyboards and mice with USB connection, that also support the PS/2 interface

CA U P2 ctn qty. 5 EDP-No. 45265

USB-PS/2 active-adapter
USB type A plug <-> 2x PS/2 socket

- Active adapter for connection of mouse and keyboard
- Supports all keys on multimedia keyboards
- Suitable for WIN 98 or higher

CC U 18 S 1.8 m ctn qty. 5 EDP-No. 45280

USB 2.0 certified connection cable set
USB type A plug <-> USB B plug / USB A socket / USB mini B plug

- For connecting the PC / laptop to periphery devices, with USB B connection / USB mini B connection or for extension existing cables
- Certified in line with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs
- Set contains:
  - 1x USB 2.0 certified connection cable USB A plug <-> USB B plug
  - 1x adapter USB B socket <-> USB A socket
  - 1x adapter USB B socket <-> USB mini B plug

CC U 10 Y 1.0 m ctn qty. 5 EDP-No. 45290 new

USB Y connection cable
2x USB type A plug <-> USB type mini B plug

- To connect external hard drives with USB mini B connections
- 2x USB A plug for power supply
  (both plugs must be connected to the same PC / laptop)
- High speed data transfer rate up to 480 Mbs

IEEE 1394 cables

CC A 20 FS 2.0 m ctn qty. 5 EDP-No. 45400

IEEE 1394 cable set
1 x cable 6 pin plug <-> 6 pin plug
2 x compact adapter 6 pin socket <-> 4 pin plug

- Enables devices with any type of 1934 plug to be connected

CC A 20 F1 2.0 m ctn qty. 5 EDP-No. 45401

IEEE 1394 cable
4 pin plug <-> 4 pin plug

- High quality shielding
- Digital audio/video connection cable for connection of a DV camcorder to a video Recorder etc.

CC A 20 F2 2.0 m ctn qty. 5 EDP-No. 45402

IEEE 1394 cable
6 pin plug <-> 6 pin plug

- High quality shielding
- Digital audio/video connection cable for connection of a DV camcorder to a video Recorder etc.

CC A 20 F3 2.0 m ctn qty. 5 EDP-No. 45403

IEEE 1394 cable
6 pin plug <-> 4 pin plug

- For connection of DV camcorders, video recorders etc. with 4 pin IEEE 1394 connection to a PC or notebook with a 6 pin connection

IEEE 1394b cables

new **CC A 20 F4** 2.0 m ctn qty. 5 EDP-No. 45428

IEEE 1394b connection cable, white
9 pin IEEE 1394b plug <-> 4 pin IEEE 1394a plug

- Connecting cable from 9 pin IEEE 1394b (FireWire 800) standard to 4 pin IEEE 1394a (FireWire 400)
- High quality shielding
- Digital AV connection cable for DV camcorders, video recorders, etc.
- Data rate 400 Mbit/s

IEEE 1394b cables

CC A 20 F5 2.0 m ctn qty. 5 EDP-No. 45429 new

IEEE 1394b connection cable, white
9 pin IEEE 1394b plug <-> 6 pin IEEE 1394a plug

- Connecting cable from 9 pin IEEE 1394b (FireWire 800) standard to 6 pin IEEE 1394a (FireWire 400)
- High quality shielding
- Digital AV connection cable for DV camcorders, video recorders, etc.
- Data rate 400 Mbit/s

Cat 6 network cables

CC N6 20 6	2.0 m	ctn qty. 5	EDP-No. 45300
CC N6 30 6	3.0 m	ctn qty. 5	EDP-No. 45301
CC N6 50 6	5.0 m	ctn qty. 5	EDP-No. 45302
CC N6 100 6	10.0 m	ctn qty. 5	EDP-No. 45303

CAT 6e network cable, transparent
RJ45 plug <-> RJ45 plug

- Category 6 network cable
- Double-shielded cable construction, SFTP
- 1:1 connected
- Plug fully shielded
- With gold contacts, for data tranfer with the lowest possible levels of interference
- Suitable for gigabit networks

CC N5 20 6	2.0 m	ctn qty. 5	EDP-No. 45310
CC N5 30 6	3.0 m	ctn qty. 5	EDP-No. 45311
CC N5 50 6	5.0 m	ctn qty. 5	EDP-No. 45312
CC N5 100 6	10.0 m	ctn qty. 5	EDP-No. 45313

CAT 6e network cable, white
RJ45 plug <-> RJ45 plug

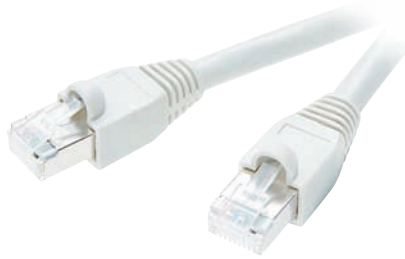

- Category 6 network cable
- Double-shielded cable construction, SFTP
- 1:1 connected
- Plug fully shielded
- Suitable for gigabit networks

Cat 6 crossover network cables

CC N6 20 6X	2.0 m	ctn qty. 5	EDP-No. 45304
CC N6 50 6X	5.0 m	ctn qty. 5	EDP-No. 45305
CC N6 100 6X	10.0 m	ctn qty. 5	EDP-No. 45306

CAT 6e network cable, transparent
RJ45 plug <-> RJ45 plug

- Category 6 network cable
- Double-shielded cable construction, SFTP
- Crossover connected
- Plug fully shielded
- With gold contacts, for data tranfer with the lowest possible levels of interference
- Suitable for gigabit networks

Cat 5e network cables

CC N4 05 5	0.5 m	ctn qty. 5	EDP-No. 45330
CC N4 20 5	2.0 m	ctn qty. 5	EDP-No. 45331
CC N4 30 5	3.0 m	ctn qty. 5	EDP-No. 45332
CC N4 50 5	5.0 m	ctn qty. 5	EDP-No. 45333
CC N4 100 5	10.0 m	ctn qty. 5	EDP-No. 45334
CC N4 150 5	15.0 m	ctn qty. 5	EDP-No. 45335
CC N4 200 5	20.0 m	ctn qty. 5	EDP-No. 45336

CAT 5e network cable, white
RJ45 plug <-> RJ45 plug

- Twisted pair network cable / SFTP
- 1:1 connected
- For linking PC to Hub
- Plug fully shielded
- Suitable for gigabit networks

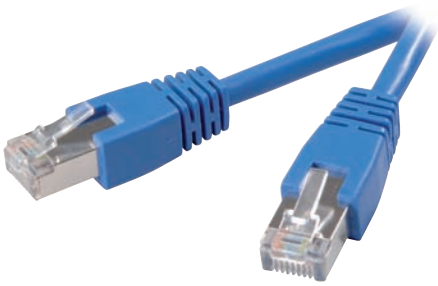

CC N4 20 5B	2.0 m	ctn qty. 5	EDP-No. 45320
CC N4 30 5B	3.0 m	ctn qty. 5	EDP-No. 45321
CC N4 50 5B	5.0 m	ctn qty. 5	EDP-No. 45322
CC N4 100 5B	10.0 m	ctn qty. 5	EDP-No. 45323
CC N4 150 5B	15.0 m	ctn qty. 5	EDP-No. 45324

CAT 5e network cable, blue
RJ45 plug <-> RJ45 plug

- Twisted pair network cable / SFTP
- 1:1 connected
- For linking PC to Hub
- Plug fully shielded
- Suitable for gigabit networks

Cat 5e crossover network cables

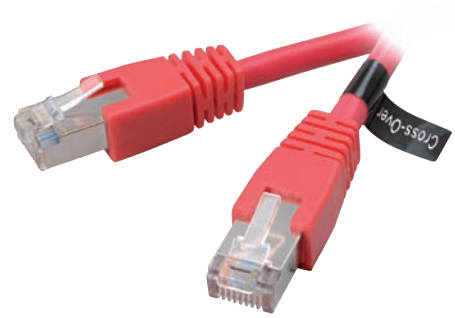

CC N4 20 5X	2.0 m	ctn qty. 5	EDP-No. 45337
CC N4 50 5X	5.0 m	ctn qty. 5	EDP-No. 45338
CC N4 100 5X	10.0 m	ctn qty. 5	EDP-No. 45339

CAT 5e crossover network cable, red
RJ45 plug <-> RJ45 plug

- Twisted pair network cable / SFTP
- Crossover connected
- For linking PC's
- Plug fully shielded
- Suitable for gigabit networks

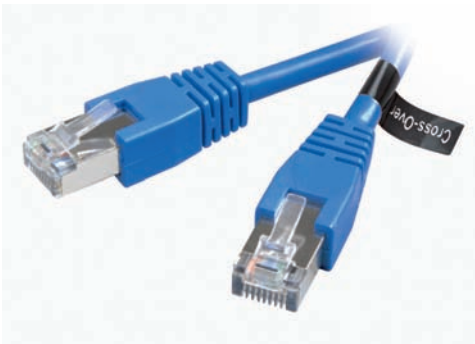

CC N4 20 5XB	2.0 m	ctn qty. 5	EDP-No. 45325
CC N4 50 5XB	5.0 m	ctn qty. 5	EDP-No. 45326
CC N4 100 5XB	10.0 m	ctn qty. 5	EDP-No. 45327

CAT 5e crossover network cable, blue
RJ45 plug <-> RJ45 plug

- Twisted pair network cable / SFTP
- Crossover connected
- For linking PC's
- Plug fully shielded
- Suitable for gigabit networks

Network adapters

CA N 5X 1 piece ctn qty. 5 EDP-No. 45340
CAT 5 network crossover adapter
RJ45 socket <-> RJ45 socket

- Short adapter to convert a 1:1 network cable into a crossover cable
- Incl. 0.15 m network cable RJ45 plug <-> RJ45 plug

CA N 5 1 piece ctn qty. 5 EDP-No. 45341
CAT 5e network 1:1 adapter
RJ45 socket <-> RJ45 socket

- Short adapter for linking two network cables
- Fully shielded by metal housing

Network installation

CA N 5P 2 pieces ctn qty. 5 EDP-No. 45342
CAT 5e network plug
RJ45 plug

- Cable input guide for round cables
- Shielded version
- Including snap protection caps
- Suitable for gigabit networks

Digital Video HDMI®

HDMI® (High Definition Multimedia Interface), the first fully digital interface. HDMI® was developed as a joint project with the film industry and several consumer electronics manufacturers. All picture and sound data in a single cable; HDMI® transfer both digital video data (image data) and digital audio data. And all that in one cable with a 19 pin mini plug. HDMI® is downward compatible with DVI-D (Digital Visual Interface). Before the introduction of HDMI®, this standard was the only widely available digital interface for video data.

CC M 15 HH14 1.5 m ctn qty. 5 EDP-No. 45380 new
CC M 30 HH14 3.0 m ctn qty. 5 EDP-No. 45381 new
HIGH SPEED HDMI® cable with Ethernet
HDMI® connector <-> HDMI® connector

- HDMI® Ethernet Channel (HEC) with up to100 Mb/s
- Supports Audio Return Channel (ARC)
- 3D – Supports 3D resolutions via HDMI® up to 1080 p (Dual Stream)
- 4K – For highest resolutions from 4096 x 2160 p @ 24 Hz
- Transfer rate > 10 Gbps
- Gold plated contacts
- Downwards compatible to DVI

HDMI® HIGH SPEED with ETHERNET

3D

1080p+ FULL HDTV

Computer Connections

Digital Video — HDMI®

CC M 20 HH13 2.0 m ctn qty. 5 EDP-No. 45424
CC M 50 HH13 5.0 m ctn qty. 5 EDP-No. 45425
High Speed HDMI® cable
HDMI® plug <-> HDMI® plug

- 3D – Supports 3D resolutions via HDMI® up to 1080p (Dual Stream)
- 4K – For highest resolutions from 4096 x 2160p @ 24 Hz
- Supports Audio Return Channel (ARC)
- Transfer rate >10 Gbps
- Gold plated contacts
- Downwards compatible to DVI

HDMI® HIGH SPEED
3D
1080p+ FULL HDTV

CC M 20 HH 2.0 m ctn qty. 5 EDP-No. 45420
CC M 50 HH 5.0 m ctn qty. 5 EDP-No. 45421
Standard HDMI® cable
HDMI® plug <-> HDMI® plug

- For connection of high resolution video equipment (HDTV)
- Supports Audio Return Channel (ARC)
- Transfer rate up to 5Gbps
- For video resolutions up to 720p / 1080i
- Downwards compatible to DVI

HDMI® STANDARD
AUDIO RETURN CHANNEL
720p/1080i HD Ready

CC M 20 HD 2.0 m ctn qty. 5 EDP-No. 45422
CC M 50 HD 5.0 m ctn qty. 5 EDP-No. 45423
HDMI® video cable
HDMI® plug <-> DVI-D plug

- HDMI®/DVI cable for the connection of high resolution video equipment
- Transfer rate up to 5Gbps
- Best possible transfer characteristics from high-quality, double shielded cable construction

Digital vide — DVI connections

CC M 18 DDID 1.8 m ctn qty. 5 EDP-No. 45430
CC M 50 DDID 5.0 m ctn qty. 5 EDP-No. 45431
DVI-I dual-link connection cable
DVI-I plug <-> DVI-I plug

- Monitor DVI integrated dual-link connection cables for the connection of a monitor with DVI digital/analog bus to a graphics card with similar connection
- Digital and analog video transfer
- Data transfer rate up to 9.9 Gbit (digital)
- Double shielded cable
- Fully shielded plug

Digital video DVI connections

CC M 18 DDDD 1.8 m ctn qty. 5 EDP-No. 45432
CC M 50 DDDD 5.0 m ctn qty. 5 EDP-No. 45433
DVI-D dual-link connection cable
DVI-D plug <-> DVI-D plug

- Monitor DVI digital dual-link connection cables for the connection of a monitor with DVI digital bus to a graphics card with similar connection
- Data transfer rate up to 9.9 Gbit
- Double shielded cable
- Fully shielded plug

CC M 18 DDDS 1.8 m ctn qty. 5 EDP-No. 45434
DVI-D single-link connection cable
DVI-D plug <-> DVI-D plug

- Monitor DVI digital single-link connection cable for connection of a monitor with DVI digital bus to a graphics card with similar connection
- Data transfer rate up to 4.95 Gbit
- Double shielded cable
- Fully shielded plug

CC M 18 DVI 1.8 m ctn qty. 5 EDP-No. 45435
DVI-I VGA connection cable
DVI-I plug <-> 15 pin HD plug

- Adapter cable for the connection of VGA monitor to the DVI-I connection with analog signal
- SVGA resolution
- Double shielded cable
- Fully shielded plug

Digital video DVI extensions

CE M 18 DDID 1.8 m ctn qty. 5 EDP-No. 45436
DVI-I dual-link extension cable
DVI-I plug <-> DVI-I socket

- DVI integrated dual-link extension cable to enhance DVI digital and integrated cables
- Digital and analog video transfer
- Double shielded cable
- Fully shielded plug

Digital video DisplayPort

CC M 18 DP 1.8 m ctn qty. 5 EDP-No. 45438
DisplayPort Audio/Video cable
DisplayPort plug <-> DisplayPort plug

- DisplayPort cable for connecting high-res monitors and other video devices
- Data transfer rate up to 10.8 Gbit
- Bidirectional auxiliary channel, 1 Mbit/s
- Supports the HDCP and DPCP copy protection protocols
- Downward compatible with VGA, DVI and HDMI®

Computer Connections

Monitor connections

CC M2 18 VV	1.8 m	ctn qty. 5	EDP-No. 45440
CC M2 50 VV	5.0 m	ctn qty. 5	EDP-No. 45441
CC M2 75 VV	7.5 m	ctn qty. 5	EDP-No. 45442
CC M2 100 VV	10.0 m	ctn qty. 5	EDP-No. 45443
CC M2 150 VV	15.0 m	ctn qty. 5	EDP-No. 45444

Monitor connection cable, high quality
15 pin HD plug <-> 15 pin HD plug

- Shielded cable
- With ferrite core to minimise interference
- Shielded 75 ohm video cable
- 1:1 VGA connection

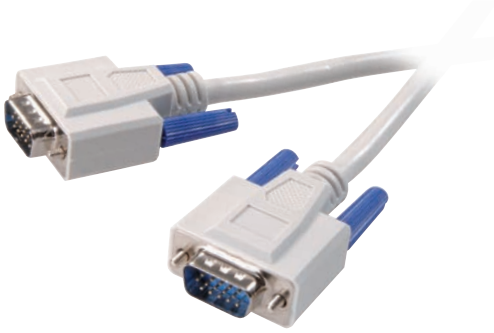

CC M1 18 VV	1.8 m	ctn qty. 5	EDP-No. 45445
CC M1 30 VV	3.0 m	ctn qty. 5	EDP-No. 45439

Monitor connection cable, standard
15 pin HD plug <-> 15 pin HD plug

- Shielded cable
- 1:1 VGA connection

CC M 20 VY	2.0 m	ctn qty. 5	EDP-No. 45446

RCA / VGA connection
3 x RCA plug -> VGA plug

- To connect DVD players with YUV output e.g. with a beamer
- Suitable for transferring video signals (75 ohm)
- It is essential that the standards of the signals on the source and target devices match

CC M 20 SV	2.0 m	ctn qty. 5	EDP-No. 45447
CC M 50 SV	5.0 m	ctn qty. 5	EDP-No. 45448

Monitor connection cable
SCART plug <-> 15 pin HD plug

- For direct connection of a video projector to a video recorder or tuner
- Shielded 75 ohm video cable

⚠ N. B.! The playback equipment must have a RGB signal to SCART connection and the display equipment must have the "Positive Scan" feature

Monitor extensions

CE M2 18 VV	1.8 m	ctn qty. 5	EDP-No. 45449
CE M2 50 VV	5.0 m	ctn qty. 5	EDP-No. 45450

Monitor connection extension cable, high-quality
15 pin HD plug -> 15 pin HD socket

- Shielded cable
- With ferrite core to minimise interference
- Shielded 75 ohm video cable
- 1:1 VGA extension

Monitor extensions

CE M1 18 VV 1.8 m ctn qty. 5 EDV-Nr. 45451
CE M1 30 VV 3.0 m ctn qty. 5 EDV-Nr. 45437 new
Monitor connection extension cable, standard
15 pin HD plug -> 15 pin HD socket

- Shielded cable
- 1:1 VGA extension

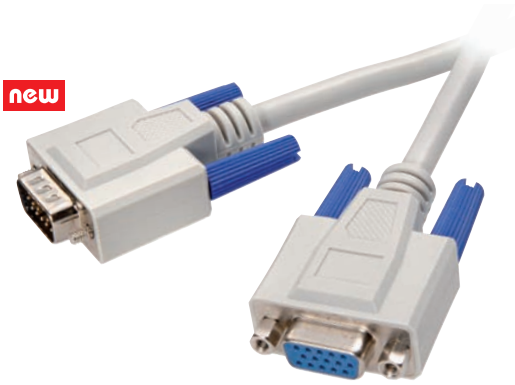

Monitor adapters

CA M 1 1 piece ctn qty. 5 EDP-No. 45452
DVI compact adapter
DVI-I plug <-> 15 pin HD socket

- Compact adapter for the connection of a VGA monitor to a graphics card with DVI connection
- Low leakage due to fully shielded housing

CA M 2 1 piece ctn qty. 5 EDP-No. 45453
DVI compact adapter
DVI-I socket <-> 15 pol. HD plug

- Compact adapter for connecting devices with a VGA output to devices with a DVI-I input
- Low leakage due to fully shielded housing

CA M 3 1 piece ctn qty. 5 EDV-Nr. 45454
DVI / HDMI® compact adapter
HDMI® plug <-> DVI-D socket

- Adapter for the connection of DVI-D cable to an HDMI® connection

CA M 6 1 piece ctn qty. 5 EDV-Nr. 45488 new
HDMI® / DVI compact adapter
DVI-D plug <-> HDMI® socket

- Adapter for the connection of HDMI® cable to a DVI connection

CA M 4 1 piece ctn qty. 5 EDP-No. 45455
Compact adapter
15 pin HD plug <-> 15 pin HD plug

- Adapter for the conversion of an extension cable into a connection cable

CA M 5 1 piece ctn qty. 5 EDP-No. 45456
Compact adapter
15 pin HD socket <-> 15 pin HD socket

- Adapter for the conversion of the connection cable into an extension cable

PC audio/video

CC A 50 1 5.0 m ctn qty. 5 EDP-No. 45404
CC A 100 1 10.0 m ctn qty. 5 EDP-No. 45405

Audio / Video connection cable
S video plug / 3.5 mm plug, stereo -> Scart plug

- Connection cable for the transfer of sound and picture signals from sound and video cards to a video recorder or TV equipment
- N.B.: TV or video equipment requires an S video capable Scart input!

CC A 20 2 2.0 m ctn qty. 5 EDP-No. 45406
CC A 50 2 5.0 m ctn qty. 5 EDP-No. 45407

Audio / Video connection cable
7 pin mini DIN plug -> RCA plug / RCA plug / S video plug

- Connection cable for the connection of a notebook or PC with 7 pin AV output to video equipment and a digital amplifier
- Output is divided into S video / composite / digital audio
- 75 ohm video cable

CC A 20 3 2.0 m ctn qty. 5 EDP-No. 45408

Audio / Video connection cable
4 pin 3.5 mm plug <-> 3 x RCA plug

- For use with equipment with combined 3.5 mm audio / video connection
- 75 ohm video cable

CC A 20 S 2.0 m ctn qty. 5 EDP-No. 45409
CC A 50 S 5.0 m ctn qty. 5 EDP-No. 45410
CC A 100 S 10.0 m ctn qty. 5 EDP-No. 45411

Audio / Video Multimedia Set
S video / RCA / 3.5 mm plug <-> Scart plug

- For transfer of audio and video data between PC and TV/video equipment
- Graphics outputs with RCA as well as S video connections are supported
- Signal direction set by selector switch
- Set consists of:
  Connection cable, 3 x RCA plug <-> 3 x RCA plug
  Connection cable, S video plug <-> S video plug
  Compact adapter, 2 x RCA socket <-> 3.5 mm plug, stereo
  Compact adapter, Scart plug (switchable) <-> 3 x RCA socket / S video socket

CE A 30 4 3.0 m ctn qty. 5 EDP-No. 45412

Audio extension cable
3.5 mm plug <-> 3.5 mm socket, stereo

- For the extension of all 3.5 mm audio connections

PC audio/video

CA A 1 0.2 m ctn qty. 5 EDP-No. 45413
Audio adapter
3.5 mm plug <-> 2 x 3.5 mm socket, stereo

- For the expansion of a 3.5 mm connection
- Use of this cable enables sound card output to be distributed to 2 outlets

CA A 2 0.15 m ctn qty. 5 EDP-No. 45414
Video adapter
S-Video plug -> RCA socket

- Adapter for the transfer of image Data from graphics cards with S video output to a device with video composite input
- For S video outputs with automatic or manual switching to FBAS (RCA) signal

CA A 3 1 piece ctn qty. 5 EDP-No. 45415
Audio compact adapter
2 x RCA socket <-> 3.5 mm plug, stereo

- Adapter for the connection of a stereo RCA cable to a socket

CC A 15 5 1.5 m ctn qty. 5 EDP-No. 45416
CC A 30 5 3.0 m ctn qty. 5 EDP-No. 45427
CC A 50 5 5.0 m ctn qty. 5 EDP-No. 45417
Audio connection cable
2 x RCA plug <-> 3.5 mm plug, stereo

- Cable for the connection of equipment with RCA and 3.5 mm connection

CA A 4 1 piece ctn qty. 5 EDP-No. 45418
Audio adapter
2 x RCA plug <-> 3.5 mm socket, stereo

- Adapter cable for the connection of a 3.5 mm cable to a RCA connection
- E.g. for active loud speaker

CC A 20 4 2.0 m ctn qty. 5 EDP-No. 45419
Audio connection cable
3.5 mm plug <-> 3.5 mm plug, stereo

- Cable for connection of active loud speaker etc. to PC

Computer Connections

PC internal

CC S 09 E 0.9 m ctn qty. 5 EDP-No. 45457
External serial ATA II connection cable
7-pin eSATA plug <-> 7-pin eSATA plug

- For connecting external hard drives or mass storage devices to eSATA Interface
- Data rate of up to 300 Mbyte/s
- Fully compatible with ATA serial I
- Serial ATA II makes it possible to "hot plug" a hard drive during operation

CC S 05 S ctn qty. 5 EDP-No. 45458
e SATA slot
Slot card with 2 external S-ATA ports

- This slot card is used to make use of existing S-ATA interfaces on the mainboard or controller from outside for external S-ATA devices.
- 2 external SATA connection ports
- Each with 30 cm SATA cable with L-type plug

CC S 05 I 0.5 m ctn qty. 5 EDP-No. 45460
CC S 09 I 0.9 m ctn qty. 5 EDP-No. 45461
Serial ATA connection cable
7 pin ATA plug <-> 7 pin ATA plug

- Data rate 166 Mbit/s
- Fully ATA serial compatible
- Serial ATA allows “hot plugging” of a hard drive during operation
- Thin cable against heat accumulation, for better system stability

CC I 12 I 1.2 m ctn qty. 5 EDP-No. 45462
E IDE hard disk cable
40 pin socket <-> 2 x 40 pin socket

- E IDE bus cable for up to 2 drives to an AT bus interface

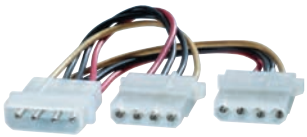

CC I 02 P 0.2 m ctn qty. 5 EDP-No. 45463
Power connection
5.25" plug <-> 2 x 5.25" socket

- Power distribution to 2 devices

PC internal

CC S 02 P 0.2 m ctn qty. 5 EDP-No. 45464
CC S 05 P 0.5 m ctn qty. 5 EDP-No. 45465
ATA power supply
5.25" plug <-> 15 pin ATA plug

- Adapter for connection serial ATA equipment to the power supply

CC I 02 G 0.25 m ctn qty. 5 EDP-No. 45489 new
PCI Express power connection cable
2x 5,25“ plug -> 6pin PCI Express socket

- For connecting PCI Express graphics cards to the computer´s power supply

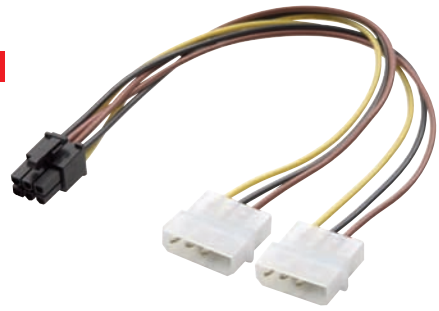

Online

CA T 1 1 piece ctn qty. 5 EDP-No. 45469
ISDN adapter
RJ45 socket <-> RJ45 socket

- For connection of two ISDN connection cables



Keyboard / mouse

CE K 20 P 2.0 m ctn qty. 5 EDP-No. 45470
Keyboard / mouse extension cable
PS/2 plug <-> PS/2 socket

- For the extension of all keyboards or mice with PS/2 connection

CA U P1 1 piece ctn qty. 5 EDP-No. 45264
USB Compact adapter
USB type A socket <-> PS2 plug

- Adapter for keyboards and mice with USB connection, that also support the PS2 interface

Computer Connections

Universal cables

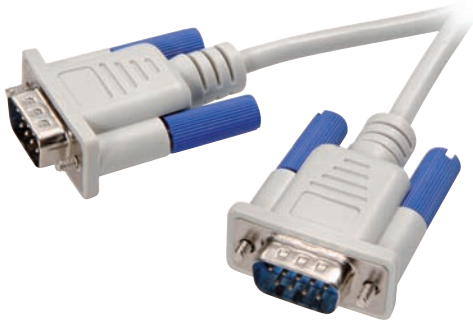

CC D 18 9 1.8 m ctn qty. 5 EDP-No. 45475
Universal connection cable
9 pin SUB-D plug <-> 9 pin SUB-D plug

- Universal connection for all devices with 9 pin SUB-D connection e.g. for modem to data to switch

CE D 18 9 1.8 m ctn qty. 5 EDP-No. 45476
CE D 50 9 5.0 m ctn qty. 5 EDP-No. 45478
Universal extension cable
9 pin SUB-D plug <-> 9 pin SUB-D socket

- For the extension of mouse / modem / joystick connection

CC D 30 N 3.0 m ctn qty. 5 EDP-No. 45479
Zero modem cable
9 pin SUB-D socket <-> 9 pin SUB-D socket

- Zero modem cable, crossed
- For the connection of a pair of PC's via the serial interface
- DFÜ or Laplink® connection

Universal adapters

CA D 1 1 piece ctn qty. 5 EDP-No. 45480
Universal compact adapter
9 pin SUB-D plug <-> 9 pin SUB-D plug

- For the connection of serial 9 pin cables

CA D 2 1 piece ctn qty. 5 EDP-No. 45481
Universal compact adapter
9 pin SUB-D socket <-> 9 pin SUB-D socket

- For the connection of serial 9 pin cables

Power

CC E 18 1.8 m ctn qty. 5 EDP-No. 45482
Power supply cable
3 pin earthed IEC plug

- Mains connection for PC, etc
- With earthing contact

CE E 18 1.8 m ctn qty. 5 EDP-No. 45483
Power supply extension cable
3 pin IEC socket <-> 3 pin IEC plug

- For extension of cooling device connection cables
- With earthing contact

CC E 18 N 1.8 m ctn qty. 5 EDP-No. 45484
Notebook mains adapter connection cable
Plug <-> IEC 320 5c plug

- Mains adapter power supplycable for notebooks, mobile power supply switching and other equipment
- With earthing contact

EPLS_6B_MS ctn qty. 12 EDP-No. 45490
Six socket master-slave multiple power outlet with surge protection

- Switchable master-slave function
- 1 x master and 5 slave socket
- Switching threshold can be freely set between 8 and 80 W
- Surge protection up to 30.000 A
- Incl. ground control
- 1.5 m cable
- Max. connection power: 3500 W / 16 A
- Children security
- Core thickness: 1.5 mm²

EPLS_6B_PNW ctn qty. 12 EDP-No. 45491
Six socket extension cable with switch and surge protection, also for RJ11 (telephone) and RJ45 (network)

- 6 x Schuko with switch
- Surge protection up to 30.000 A, also for RJ11 (telephone) and RJ45 (network)
- With Reset button to reset the overload protection function
- Incl. ground control
- 1.5 m cable
- Max. connection power: 3500 W / 16 A
- Children security
- Core thickness: 1.5 mm²

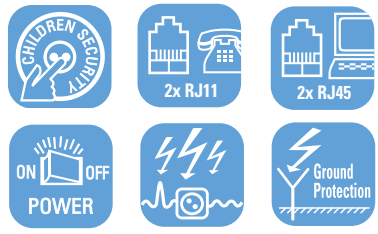

Cleaning & Protection

Archiving for DVD

DVD2 Box 5 ctn qty. 30 EDP-No. 19547
Double DVD Box, black

- Black DVD hardcover box
- Unbreakable material
- Shrink wrapped in sets of 5
- For 2 DVDs or CD-ROMs each
- Dimensions: 13,4 x 19 x 7 cm
- Only sold in full packaging units!

DVD2 SLIM BOX5 ctn qty. 30 EDP-No. 27928 new
Slim DVD Double Case, 5pcs Pack, black

- Slim DVD Double Cases
- 5pcs pack
- For 2 DVD or CD/CD-Rom each
- Dimensions: 13,5 x 19 x 3,5 cm
- Shrink wrapped

DVD Slim Box 10 ctn qty. 10 EDP-No. 22008
Black DVD Hardcover Box

- For 1 DVD incl. booklet
- Transparent foil attached outside to insert the DVD cover
- Additional brackets inside for the booklet
- Shrink wrapped in sets of 10
- Dimensions: 19,2 x 13,6 x 7 cm
- Only sold in full packaging units!

DVD Box 5 ctn qty. 10 EDP-No. 22009
for 1 DVD incl. Booklet

- Transparent foil attached outside to insert the DVD cover
- Standard version, 14 mm flat
- Additional brackets inside for the booklet
- Shrink wrapped in sets of 5
- Dimensions: 19,2 x 13,6 x 7 cm
- Only sold in full packaging units!

Cleaning & Protection

Archiving for CD / CD ROM

CD BOX ctn qty. 40 EDP-No. 12006

CD Jewel Case, Single, 5pcs Pack, black

- Black/transparent CD jewel cases
- Unbreakable material
- Protects the CD from damage
- Shrink wrapped in sets of 5
- For 1 CD/CD-ROM each
- Dimensions: 12,5 x 14x 5 cm

CD-DVD Case 10 ctn qty. 10 EDP-No. 27622

CD/DVD Jewel Cases, 10pcs Pack, black

- Black/transparent CD jewel cases
- Dimensions: 12,5 x 14,3 x 0,9 cm
- For 1 CD incl. booklet
- Shrink wrapped

CD Slim Case Set ctn qty. 10 EDP-No. 22007

CD Slim Cases

- Black/transparent CD jewel cases
- Unbreakable material
- Protects the CD from damage
- Shrink wrapped in sets of 10
- For one CD-ROM each with insert
- Dimensions: 12,5 x 14,5 x 5,2 cm
- Only sold in full packaging units!

Archiving – CD Slim Case Set

CD slim cases in bulk packs

- Unbreakable material
- Protects the CD from damage
- For one CD-ROM each with insert
- Black/transparent or coloured/transparent (5 assorted colours)

25 pack black/transparent slim cases ctn qty. 8 EDP-No. 21869

foil-wrapped

25 pack coloured/transparent slim cases ctn qty. 8 EDP-No. 21870

5 assorted colours (pink, purple, blue, green, orange), foil-wrapped

Archiving – Multi Jewel Cases

CD BOX II ctn qty. 40 EDP-No. 12121
Double CD Jewel Case

- Black/transparent CD jewel cases
- Unbreakable material
- Protects the CD from damage
- Shrink wrapped in sets of 5
- For 2 CD-ROMs each
- Dimensions: 12,5 x 14 x 5 cm

CD BOX Double ctn qty. 40 EDP-No. 12105
Double CD Jewel Case

- Transparent CD jewel cases
- Unbreakable material
- Protects the CD from damage
- Shrink wrapped in sets of 5
- For 2 CD-ROMs each
- Dimensions: 12,5 x 14 x 5 cm

Archiving – CD archiving covers

- Practical clear plastic cover for storing loose CDs without a cover
- For 1 CD each
- Made of transparent, heat-resistant PP material
- Package: in plastic box

CD PPE 25 ctn qty. 12 EDP-No. 22062
CD archive sleeves, transparent, 25 pieces

CD PPE 50 ctn qty. 8 EDP-No. 22063
CD archive sleeves, transparent, 50 pieces

Archiving for Blu-Ray

BR CASE 5 ctn qty. 20 EDP-No. 27629 new
Blu-Ray disc Jewel Case, 5 pieces

- Blu-Ray Disc Jewel Case, foil-wrapped in sets of 5
- Dimensions: 13,5 x 17 x 5 cm
- Colour: blue
- Only sold in full packaging units!

BR2 CASE 5 ctn qty. 20 EDP-No. 27630 new
Double Blu-Ray disc Jewel Case, 5 pieces

- Double Blu-Ray Disc Jewel Case, foil-wrapped in sets of 5
- Dimensions: 13,5 x 17 x 5 cm
- Colour: blue
- Only sold in full packaging units!

CD/DVD Organiser – CD Budget Line

	CDW 24 B **Organiser for 24 CDs or 12 CDs**	ctn qty. 16	EDP-No. 18911
new	**CDW 48 B** **Organiser for 48 CDs or 24 CDs**	ctn qty. 14	EDP-No. 27400
new	**CDW 96 B** **Organiser for 96 CDs or 48 CDs**	ctn qty. 10	EDP-No. 27401

- Material: water resistant nylon with silver grey highlights
- Inside: transparent sleeves of heat resistant PP
- Black fleece material protects CDs from scratches
- Ideal for travelling!
- Only available in complete carton units of 16 pcs.

CD/DVD Organiser – CD Sport Line

CD Sport 24 **CD organiser for 24 CDs**	ctn qty. 12	EDP-No. 23202
CD Sport 48 **CD organiser for 48 CDs**	ctn qty. 8	EDP-No. 23203
CD Sport 64 **CD organiser for 64 CDs**	ctn qty. 8	EDP-No. 23204
CD Sport 128 **CD organiser for 128 CDs**	ctn qty. 6	EDP-No. 23205

- Made of black and red robust nylon with silver piping
- Practical carrying handle made of elastic – also ideal when you are on the go
- Reinforced, transparent index areas for clear overview of CDs
- Especially protective fleece with anti-static effect for protecting CDs
- High-quality design

CD/DVD Organiser – CD Stripes Line

CDW Stripes 24 ctn qty. 72 EDP-No. 27065 new
CD organiser for 24 CDs
CDW Stripes 48 ctn qty. 32 EDP-No. 27066 new
CD organiser for 48 CDs

CD organiser range with timeless clean lines and trendy colour combinations

- Material: 600 D Polyester
- Colour: grey with blue stripes
- Lining: PP
- Silver zipper puller
- Black non-woven antistatic material
- Vivanco rubber logo

CD/DVD Organiser – CD Budget Line

PRO CDK 320 ctn qty. 6 EDP-No. 18932
CD organiser for 320 CDs

- Material: structured synthetic leather
- Practical carrying handle
- Interior: heat-resistant PP sleeves for clear storage
- Black anti-static fleece protects the CDs from scratches and soiling
- Removable shoulder strap
- High quality
- Available in full packaging units of 6 only

Hard Disc Case

HDC 2,5 ctn qty. 16 EDP-No. 26600 new
Hard Disc Case 2,5"

- Material outside: EVA
- Material inside: Fleece
- Double zipper
- Colour: black
- Inner dimension: approx. 13 x 8 x 2,5 cm
- Outer dimension: approx. 15,2 x 10,5 x 3 cm

HDC 3,5 ctn qty. 14 EDP-No. 26601 new
Hard Disc Case 3,5"

- Material outside: EVA
- Material inside: Fleece
- Double zipper
- Colour: black
- Inner dimension: approx. 23 x 15 x 5,7 cm
- Outer dimension: approx. 25 x 18 x 6,3 cm

PC Cleaning Systems

PC2 EDP-No. 26959

Cleaning system for PC monitor and keyboard

- Antistatic brush removes dust
- Alcohol free, drip resistant fluid safely loosens dirt and grime
- 150 ml of fluid gives approximately 100 applications
- 30 cm x 30 cm, Microfiber cloth for streak free cleaning, Washable- for extended usuage
- Dedicated Keyboard cleaning pen with 3 spare heads

PC3 EDP-No. 26960

Cleaning solution suitable for all PC monitors

- Alcohol free , drip resistant fluid safely loosens dirt and grime
- 150 ml of fluid gives approximately 100 applications

PC1 EDP-No. 26958

Air duster

- Air duster specially developed for keyboards, printers and disk drives
- Removes dust even in inaccessible areas
- Also for overhead application
- Non-inflammable, contains no CFC or HCFC
- Contents: 125 ml e
- Dimensions: ø 5,5 x height 18,5 cm

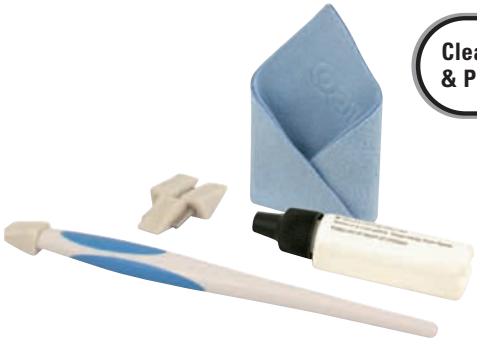

PC4 EDP-No. 26961

Keyboard cleaner

- Keyboard cleaning pen
- Surface cleaning fluid
- 3 spare cleaning heads

PC5 EDP-No. 26962

Microfiber cloth for PC monitors

- Microfiber cloth for PC monitors
- Washable – for extended usuage

Cleaning & Protection

PC Cleaning Systems

PC6 EDP-No. 26963

Laptop cleaning system

- Cleaning system suitable for laptops and mini notebooks
- Antistatic brush removes dust
- Alcohol free, drip resistant fluid safely loosens dirt and grime from screen
- 60 ml of fluid gives approximately 50 applications
- 30 cm x 30 cm, Microfiber cloth for streak free cleaning, washable – for extended usuage
- Convenient storage case

PC7 EDP-No. 26964

Laptop screen cleaning fluid

- Cleaning solution for all PC monitors
- Alcohol free, drip resistant fluid safely loosens dirt and grime
- 60 ml of fluid gives approximately 50 applications

PC8 EDP-No. 26965

Cleaning tissues for LCD, TFT and LED screens

- 100 moist cleaning tissues supplied in dispensing tub
- Practical, reclosable dispenser box
- Cleaning liquid is free of alcohol (not inflammable)
- Avoid scratches and smudge
- Safely removes dust and dirt
- Rapid drying and antistatic characteristics
- For LCD, TFT, LED, plasma, laptop, flat screens, PDA and all glass surfaces

PC9 EDP-No. 26966

PC CD/DVD lens cleaner

- 2 brush cleaning system
- Brush and cleaning fluid cleans laser optics in your CD/DVD drive

Others

CD IPN4 ctn qty. 12 EDP-No. 26953

Pen for writing on CDs (4 colours)

- CD marker with 4 colours for permanent writing on CD, DVD, Blu-Ray
- Indelible, water resistant special ink on waterbasis

Universal Sleeves for Mobil Phones

MP3 TU 1 ctn qty. 20 EDP-No. 27862
MP3 Pouch case for Apple iPod touch 2G / 3G
Size (B 6.7 x H 11.5 x T 2 cm)

MP3 TU 2 ctn qty. 20 EDP-No. 27863
MP3 Pouch case for Apple iPod touch 2G / 3G
Size (B 6.7 x H 11.5 x T 2 cm)

The cases for mobiles, MP3 players etc. are made from a unique material which feels like velvet or suede. This is a new specially developed nano-technology material which is much more hard wearing, durable and rugged in daily use. The soft cases almost invite touching, and therefore offer a special tactile experience.

- For iPod touch 2G and 3G, for mobile phones, MP3 players (e.g. Samsung), cameras or similar devices with the same dimensions

B-POUCH S ctn qty. 20 EDP-No. 25805
bazoo universal case "POUCHES"
Size S (B 6.5 x H 11 x T 2 cm)

B-POUCH M ctn qty. 20 EDP-No. 25806
bazoo universal case "POUCHES"
Size M (B 7.2 x H 11,5 x T 2 cm)

Cool universal bags with embossed flame patterns

The cases for mobiles, MP3 players etc. are made from a unique material which feels like velvet or suede. This is a new specially developed nano-technology material which is much more hard wearing, durable and rugged in daily use. The soft cases almost invite touching, and therefore offer a special tactile experience.
Thanks to their universal sizes, the cases are suitable for all small electronic devices such as mobile phones, MP3 players, iPods or digital cameras. As well as this, all Apple iPhone models fit into the M-size cases. The devices are protected by a velvet inner lining.

- Sorted by colour: black, red, orange, blue; attractive sales display contains 5 items each

Also available as individual items:

B-POUCH BL S ctn qty. 20 EDP-No. 25814
bazoo universal case "POUCHES"
black, Size S (B 6.5 x H 11 x T 2 cm)

B-POUCH BL M ctn qty. 20 EDP-No. 25815
bazoo universal case "POUCHES"
black, Size M (B 7.2 x H 11,5 x T 2 cm)

bazoo
www.bazoo.eu

Universal Sleeves for Mobil Phones

B-S POUCH ctn qty. 20 EDP-No. 26991
bazoo Universal case „POUCHES“
Size S (B 6.5 x H 11 x T 2 cm)

B-M POUCH ctn qty. 20 EDP-No. 26992
bazoo Universal case „POUCHES“
Size M (B 7.2 x H 11,5 x T 2 cm)

The cases for mobiles, MP3 players etc. are made from a unique material which feels like velvet or suede. This is a new specially developed nano-technology material which is much more hard wearing, durable and rugged in daily use. The soft cases almost invite touching, and therefore offer a special tactile experience.
Thanks to their universal sizes, the cases are suitable for all small electronic devices such as mobile phones, MP3 players, iPods or digital cameras.
As well as this, all Apple iPhone models fit into the M-size cases.
The devices are protected by a velvet inner lining.

- Trendy black and cool patterns, attractive sales display contains 5 items each

Mousepads

B-MP GP SHS

ctn qty. 30 EDP-No. 28279 new

bazoo High Speed Gaming Mousepad, SHIVA S

The new bazoo SHIVA S Gaming Mousepad allows fast reactions even in tight game situations. The anti-scratch SuperGlide surface makes extremely fast mouse movements possible - whenever the game situation needs it. Leading gaming mice show a top performance on the innovative high speed surface - no matter if they use laser, optical or BlueSense sensors! The rubbered bottom side guarantees a maximum grip on the desk's surface. The SHIVA S mousepad has an optimized gaming size of 355 x 260 mm and therefore is optimal for any game and gamer!

- Mousepad size: 355 x 260 mm
- Anti-slip rubbered bottom side (ExtraGrip)
- Anti-scratch SuperGlide surface for fast movements
- Works with all sensors
- Stable and hard material for highest grip and performance



B-MP GP SHP

ctn qty. 30 EDP-No. 28281 new

bazoo High Precision Gaming Mousepad, SHIVA P

The new bazoo SHIVA P Gaming Mousepad has been developed for games and gamers needing highest precision and control for their mouse movements.
The roughly textured SuperControl surface allows the pixel-perfect positioning of the mouse cursor of any leading gaming mouse - no matter if they use laser, optical or BlueSense sensors! The rubbered bottom side guarantees a maximum grip on the desk's surface. The SHIVA S mousepad has an optimized gaming size of 355 x 260 mm and therefore is optimal for any game and gamer!

- Mousepad size: 355 x 260 mm
- Anti-slip rubbered bottom side (ExtraGrip)
- Roughly textured SuperControl surface for high precision
- Works with all sensors
- Flexible and soft structure makes the pad a good companion for travelling

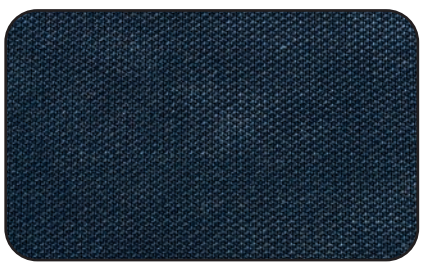

Mousepads

new **B-MP 3-IN-1 BK** ctn qty. 24 EDP-No. 28277

bazoo 3-IN-1 MULTIFUNCTION PAD

The new bazoo 3-IN-1 Multifunction Pads offer a new combination of useful features for Netbooks and Notebooks. Beside the mousepad function it can be used to dry clean the display or glossy surfaces of Netbooks. As third function it can be put between the keyboard and the display to protect this from scratches during transportation.

- Mousepad size: 258 x 160 mm
- Rubbered backing for use on any surface
- Innovative surface for universal use of all sensors
- Special material structure to protect the display from scratches
- Microfibers for thorough and careful cleaning
- Antimicrobial fiber technology - protects against micro organism without being harmful for the environment

new **B-MP MP RD** ctn qty. 50 EDP-No. 28269

bazoo METALPAD - Ultrathin Metallic-Mousepad

new **B-MP MP BL** ctn qty. 50 EDP-No. 28270

bazoo METALPAD - Ultrathin Metallic-Mousepad

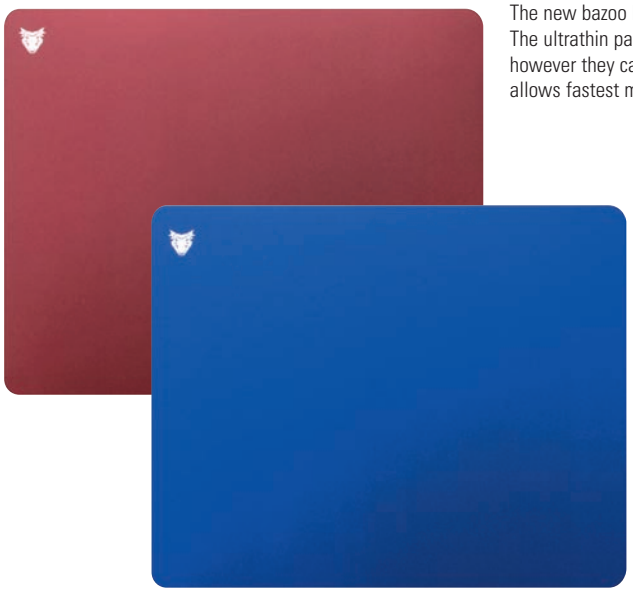

The new bazoo METALPAD mousepads combine modern motifs and surfaces and innovative materials. The ultrathin pads (only 0.4 mm thick!) stick to the desk's surface and cannot be moved accidentally - however they can be removed and replaced without any stains! The SuperGlide metallic surface allows fastest movements of the mouse and works with any mouse sensor.

- Mousepad size: 220 x 180 mm
- Ultrathin material, only 0.4 mm thick
- Antislip SuperGrip metallic bottom side
- Anti-scratch SuperGlide surface for fastest movements
- Works with all sensors and mice types



Mousepads

B-MP MP BZ ctn qty. 50 EDP-No. 28271 new
bazoo METALPAD
- Ultrathin Metallic-Motif-Mousepad, Motif A

B-MP MP CRN ctn qty. 50 EDP-No. 28272 new
bazoo METALPAD
- Ultrathin Metallic-Motif-Mousepad, Motif B

B-MP MP GUI ctn qty. 50 EDP-No. 28273 new
bazoo METALPAD
- Ultrathin Metallic-Motif-Mousepad, Motif C

B-MP MP POP ctn qty. 50 EDP-No. 28274 new
bazoo METALPAD
- Ultrathin Metallic-Motif-Mousepad, Motif D

B-MP MP MAT ctn qty. 50 EDP-No. 28275 new
bazoo METALPAD
- Ultrathin Metallic-Motif-Mousepad, Motif E

B-MP MP ROB ctn qty. 50 EDP-No. 28276 new
bazoo METALPAD
- Ultrathin Metallic-Motif-Mousepad, Motif F

The new bazoo METALPAD mousepads combine modern motifs and surfaces and innovative materials. The ultrathin pads (only 0.4 mm thick!) stick to the desk's surface and cannot be moved accidentally - however they can be removed and replaced without any stains! The SuperGlide metallic surface allows fastest movements of the mouse and works with any mouse sensor.

- Mousepad size: 220 x 180 mm
- Ultrathin material, only 0.4mm thick
- Antislip SuperGrip metallic bottom side
- Anti-scratch SuperGlide surface for fastest movements
- Works with all sensors and mice types

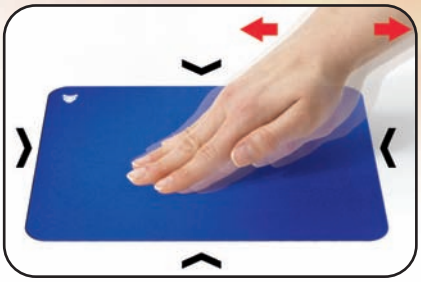



A

B

C

D

E

F

Lifestyle

Mousepads

new **B-MP PP NAT** ctn qty. 20 EDP-No. 28265

bazoo PICTUREPAD
Ultrathin Motif Mousepad

The new bazoo PICTUREPAD mousepads combine modern motifs and innovative materials.
The ultrathin pads (only 0.4 mm thick!) stick to the desk's surface and cannot be moved accidentally - however they can be removed and replaced without any stains! The carefully selected motifs and surfaces allow the use of the pads with any mouse and sensor type - no matter if the mouse uses a ball or a laser sensor!

- Mousepad size: 240 x 190 mm
- Ultrathin material, only 0.4 mm thick
- Antislip bottom
- Works with all sensors and mice types
- RDC allows flexible positioning in the shop

The motifs of this nature series show original pictures licensed by National Geographic:

- Penguins, Antarctica
- Amazonas, Brasil
- Yoho National Park British Columbia, Canada
- Queensland, Australia



Mousepads

B-MP PP HERO ctn qty. 20 EDP-No. 28266 new

bazoo PICTUREPAD
Ultrathin Motif Mousepad

The new bazoo PICTUREPAD mousepads combine modern motifs and innovative materials.
The ultrathin pads (only 0.4 mm thick!) stick to the desk's surface and cannot be moved accidentally - however they can be removed and replaced without any stains! The carefully selected motifs and surfaces allow the use of the pads with any mouse and sensor type - no matter if the mouse uses a ball or a laser sensor!

- Mousepad size: 240 x 190 mm
- Ultrathin material, only 0.4 mm thick
- Antislip bottom
- Works with all sensors and mice types
- RDC allows flexible positioning in the shop

The motifs of this hero series show typical license-free scenes and situations taken from superhero comics.
All motifs are bazoo exclusive motifs!



Lifestyle

Skins

new **B-SSK LEO 10** ctn qty. 30 EDP-No. 28290

bazoo SAFARISKIN Notebook Decoration Foil

This extravagant bazoo SAFARISKIN really creates attention and makes an individual Notebook! Thanks to the cutting marks on the backside this high quality metal foil can simply be cut to any size and therefore can be made to fit any notebook lid. The special bottom side allows the secure mount on the lid - but it can easily be peeled off and re-mounted again.
The anti-scratch surface offers additional protection of the lid of the notebook.

- Foil size is 305 x 240 mm (for 10" - 12" notebooks)
- Special self-adhesive backside, can be removed without stains
- Anti-scratch surface for extra protection
- Cutting marks on the backside for simple cutting

Skins

With the bazoo METALSKINS every Notebook/Netbook can be easily decorated and upgraded. Thanks to the cutting marks on the backside this high quality metal foil can simply be cut to any size and therefore can be made to fit any notebook lid. The special bottom side allows the secure mount on the lid - but it can easily be peeled off and re-mounted again. The anti-scratch surface offers additional protection of the lid of the notebook.

- Special self-adhesive backside, can be removed without stains
- Anti-scratch surface for extra protection
- Cutting marks on the backside for simple cutting

For 15" – 17" notebooks: Foil size is 415 x 315 mm

B-MSK CRN 15 ctn qty. 30 EDP-No. 28286 new
bazoo METALSKIN "Crown" Notebook Decoration Foil

B-MSK GUI 15 ctn qty. 30 EDP-No. 28287 new
bazoo METALSKIN "Guitar" Notebook Decoration Foil

B-MSK BZ 15 ctn qty. 30 EDP-No. 28288 new
bazoo METALSKIN "Dragon" Notebook Decoration Foil

B-MSK MAT 15 ctn qty. 30 EDP-No. 28289 new
bazoo METALSKIN "Blue Head" Notebook Decoration

For 10" – 12" notebooks: Foil size is 305 x 240 mm

B-MSK CRN 10 ctn qty. 30 EDP-No. 28282 new
bazoo METALSKIN "Crown" Notebook Decoration Foil

B-MSK GUI 10 ctn qty. 30 EDP-No. 28283 new
bazoo METALSKIN "Guitar" Notebook Decoration Foil

B-MSK BZ 10 ctn qty. 30 EDP-No. 28284 new
bazoo METALSKIN "Dragon" Notebook Decoration Foil

B-MSK MAT 10 ctn qty. 30 EDP-No. 28285 new
bazoo METALSKIN "Blue Head" Notebook Decoration

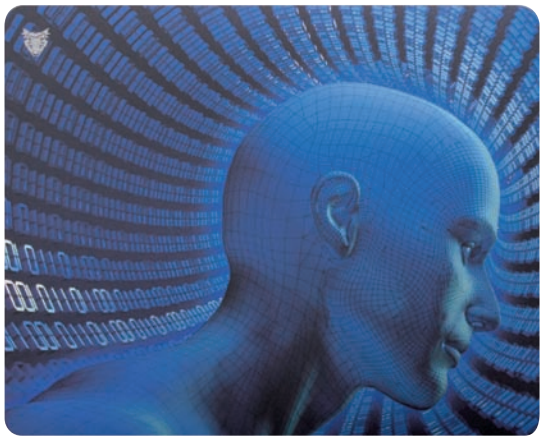

macally™

Macally for Mac®

BOOKSHELL2-R ctn qty. 10 EDP-No. 26246

Hard case protection cover for 13" aluminium MacBook®

- Two piece snap-on hard case cover
- Stylish leather look and feel
- Microsuede inner lining to prevent scratches
- Access to all ports, CD/DVD slot and Apple® remote
- Open rear for maximum ventilation
- Specially designed for your 13-inch aluminium MacBook
- Colour: red

BOOKSHELL2-B ctn qty. 10 EDP-No. 26247

Hard case protection cover for 13" aluminium MacBook®

- Two piece snap-on hard case cover
- Stylish leather look and feel
- Microsuede inner lining to prevent scratches
- Access to all ports, CD/DVD slot and Apple® remote
- Open rear for maximum ventilation
- Colour: black

BOOKSHELLPRO2 ctn qty. 10 EDP-No. 26250

Hard case protection cover for 15" aluminium MacBookPro®

- Two piece snap-on hard case cover
- Stylish leather look and feel
- Microsuede inner lining to prevent scratches
- Access to all ports, CD/DVD slot and Apple® remote
- Open rear for maximum ventilation
- Colour: black

new **ICESHELL** ctn qty. 10 EDP-No. 27638

Clear case protection cover for 13-inch aluminium MacBook® Pro

- Two piece snap-on clear case cover
- Protects against dust and scratches
- Access to all ports, SuperDrive slot and Apple® remote
- Open rear for maximum ventilation
- Specially designed for your 13-inch aluminium MacBook Pro

Macally for Mac®

EZBOOK-PAD

ctn qty. 10 EDP-No. 27636 new

Aluminium cooling stand for laptop computer

- Multiple adjustable heights for an improved typing and viewing comfort
- Adjustable fan location to match with laptop's heat area
- Super quiet fan for maximum heat dissipation
- USB powered (no additional power adapter needed)
- USB pass through port to connect other USB devices without losing an USB port
- Slip-resistant pads to secure your laptop on your desk and protect it from scratches
- Elegant aluminium design to match your MacBook® and MacBookPro®
- Compatible with any laptop up to 15"

ECOFAN-PRO

ctn qty. 10 EDP-No. 28337 new

Bamboo cooling stand for laptop computer

- Three adjustable heights to improve typing and viewing comfort
- Collapses into low profile for easy storage
- Two super quiet fans for maximum heat dissipation
- Organic and eco-friendly bamboo material for a greener living lifestyle
- Powered from your laptop's USB port (no additional power adapter needed)
- Compatible with any laptop up to 17"

TURTLE

ctn qty. 20 EDP-No. 26216

Macally Laser Notebook Mouse TURTLE

Laser notebook mouse with retractable USB cable

- 800 dpi laser sensor resolution
- Ergonomic design for both left and right hand use
- Compartment in mouse bottom to retract and store the USB cable
- 3 buttons incl. scroll wheel
- Cable length approx. 90 cm

System requirements:
- MacOS X 10.1.5 or later
- Windows 2000 (SP4), XP or Vista

OPTIMO

ctn qty. 20 EDP-No. 27869 new

Wireless 2.4 GHz notebook mouse with USB receiver compartment

- Adjustable sensitivity (800 / 1.600 dpi)
- Ergonomic design for both right and left hand use
- Compartment for receiver and batteries below the lid
- 3 buttons incl. scroll wheel
- Incl. battery

ICECAMII

ctn qty. 20 EDP-No. 26217

Macally Webcam "ICECAM II"

USB 2.0 webcam with microphone

- UVC standard compatible webcam (no driver required)
- Adjustable focus lens: 640 x 480 VGA resolution
- Up to 30 frames/sec (Depends on computer hardware, application and internet speed)
- Flexible base/mount clip
- 1.5 m cable with USB plug
- Power/status LED indicator
- Microphone

System requirements:
- USB port
- Mac OS X v10.4.11 or later
- Microsoft Windows XP SP2 / Vista

Macally for iPad®

new **MSUIT-PAD** ctn qty. 5 EDP-No. 28370

Protective silicon cover for iPad®

- Non-slip silicon case for maximum protection
- Form fitting material for quick and easy removal of iPad®
- Durable lightweight design
- Open to all connections and controls

new **METROM-PAD** ctn qty. 5 EDP-No. 28371

Protective case with mirrored chrome finish for iPad®

- Chrome finish hardshell plastic case for maximum protection and a perfect fit
- Easy and secure snap-on design
- Durable lightweight design
- Open to all connections and controls

new **METROL-PAD** ctn qty. 5 EDP-No. 28372

Clear protective snap-on case with silicon grip for iPad®

- Crystal clear case to display your iPad® in its original appearance
- Hardshell back with ribbed silicon edge for maximum protection and grip
- Form fitting silicon edge for quick and easy removal of iPad®
- Open to all connections and controls

new **METROC-PAD** ctn qty. 5 EDP-No. 28373

Clear protective snap-on case with silicon grip for iPad®

- Crystal clear case to display your iPad® in its original appearance
- Hardshell plastic for maximum protection and a perfect fit
- Easy and secure snap-on design
- Durable lightweight design
- Open to all connections and controls

Macally for iPad®

METROB-PAD
ctn qty. 5 EDP-No. 28374 new

Protective snap-on case for iPad®

- Hardshell plastic for maximum protection and a perfect fit
- Easy and secure snap-on design
- Durable lightweight design
- Open to all connections and controls

FLEXFIT-PAD
ctn qty. 5 EDP-No. 28375 new

Flexible clear protective case for iPad®

- Crystal clear case to display your iPad® in its original appearance
- Non-slip TPU material - offers flexibility with better abrasion resistance than silicon, while maintaining outstanding durability similar to plastic hardshell
- Form fitting material for quick and easy removal of iPad®
- Open to all connections and controls

BOOKSTAND
ctn qty. 5 EDP-No. 28376 new

Protective case and stand for iPad®, grey

- Works both as a protective case as well as a viewing stand to improve typing and viewing comfort
- Offers full protection to your iPad®
- Form fitting material for quick and easy removal of iPad®
- Durable lightweight design
- Full access to all connections and controls

BOOKSTAND-B
ctn qty. 5 EDP-No. 28640 new

Protective case and stand for iPad®, black

- Works both as a protective case as well as a viewing stand to improve typing and viewing comfort
- Offers full protection to your iPad®
- Form fitting material for quick and easy removal of iPad®
- Durable lightweight design
- Full access to all connections and controls

Macally for iPhone® 4

new **METROB-P4** ctn qty. 10 EDP-No. 28706

Protective snap-on cover for iPhone® 4

- Ultra thin snap-on design
- Uniquely designed with detachable residue-free screen wipe for easy screen cleaning anytime, anywhere
- Patterned non-slip surface for a secure grip
- Full access to all ports and controls

new **MSUIT-P4** ctn qty. 10 EDP-No. 28707

Protective silicon cover for iPhone® 4

- Form fitting silicon cover for quick and easy removal
- Uniquely designed with detachable residue-free screen wipe for easy screen cleaning anytime, anywhere
- Patterned non-slip surface for a secure grip
- Full access to all ports and controls

new **FLEXFIT-P4** ctn qty. 10 EDP-No. 28708

Flexible clear protective cover for iPhone® 4

- Form fitting material for quick and easy removal
- Crystal clear cover to display your iPhone® in its original appearance
- Durable lightweight construction
- Clear non-slip TPU material offers durability and better abrasion resistance
- Full access to all ports and controls

new **METROC-P4** ctn qty. 10 EDP-No. 28709

Clear protective snap-on cover for iPhone® 4

- Ultra thin snap-on design
- Crystal clear cover to display your iPhone® in its original appearance
- Uniquely designed with detachable residue-free screen wipe for easy screen cleaning anytime, anywhere
- Full access to all ports and controls

Macally for iPhone® 4

METROL-P4 ctn qty. 10 EDP-No. 28710 new

Clear protective cover with rubber grip for iPhone® 4

- Hardshell back panel with rubber edges for best grip and protection
- Uniquely designed clear case with mirrored accent
- Durable lightweight construction
- Protects your iPhone® from bumps and scratches

SPORTIVO-P4 ctn qty. 10 EDP-No. 28711 new

Swivel sports armband for iPhone® 4

- Durable and lightweight materials to help ensure maximum comfort during your workout rigors
- The rotating swivel mount is specially constructed to accommodate viewing in any direction
- Provides full navigational control through clear, protective window cover
- Elastic armband adjusts 9 to 17 inches for a secure and comfortable fit

KICKSTAND-P4 ctn qty. 10 EDP-No. 28712 new

Protective snap-on cover with stand for iPhone® 4

- Quick and easy snap-on design
- Convenient kick-stand to accommodate horizontal viewing
- Rubberized surface for a secure grip
- Protects your iPhone® from bumps and scratches
- Full access to all ports and controls

IP-PH808-P4 ctn qty. 60 EDP-No. 28713 new

4 way privacy display protection film for iPhone® 4

- Prevents your screen from being viewed by others nearby
- Privacy screen works when iPhone® is used vertically and horizontally
- Does not affect touch screen sensitivity
- Anti-smudge and glare resistant material
- Non-damaging residue free adhe, easy application

Apple Accessories

Macally for iPhone® 4

new **TUNEPAL** ctn qty. 10 EDP-No. 26238

Stereo hands-free headset and audio splitter for iPhone®

- In-ear design (includes 3 extra sets of earbuds in S, M and L)
- Exceptional audio with enhanced bass
- Crystal clear microphone
- 1 Click answer/hang up
- Play/Pause music
- Detachable splitter jacks
- Works with iPod®, iPhone® and any other device with 3.5 mm audio jack

Macally iPhone® Power and Accessories

USBPOWER ctn qty. 10 EDP-No. 26249

Universal USB AC adapter and Car Charger

- Charges your iPod® or iPhone® and all other USB powered devices through the wall power outlet and cigarette lighter outlet in your car
- Allows you to charge your device in more than 150 countries
- Standard USB port
- Supports 100 VAC to 240 VAC input with auto switching
- Built-in circuit protection
- LED power indicator
- Connects your iPod® or iPhone® with existing Dock Connector to USB cable (not included)
- Compact design for maximum portability
- Includes USB AC adapter, 4 universal interchangeable plugs, USB car charger and carrying pouch

new **POWER-LINK8** ctn qty. 10 EDP-No. 28317

Battery pack for iPhone 3G/S™ and iPod Touch 2G/3G

- 750 mAh Li-Polymer battery, extends talk time on iPhone® up to 3.5 hours and video play time up to 1.5 hours
- 30-pin Dock Connector, connects to your iPhone®/iPod® to synchronize data and recharge battery
- Mini USB port, connects to your computer to synchronize data and recharge iPhone®/iPod®/PowerLink8
- Connects easily to your iPhone®/iPod® even when it's in a protective case
- Battery level indicator
- Works with iPhone® and iPod® with 30-pin Dock Connector
- Includes battery, USB cable and user guide

Macally iPhone® Power and Accessories

MGRIP ctn qty. 10 EDP-No. 28318 new

Adjustable car suction holder mount for iPhone® 3G/S and iPod® Touch 2G/3G

- Suction holder with lock key for a secure grip to the windshield
- Easy removeable and hideable
- Flexible neck and 360-degree rotating holder for the best viewing angle
- 6 selectable holder positions to perfectly fit your iPhone®, iPod® and mobile phone
- Fits iPhone® and iPod®, also while in a protection case
- Soft holder grips and back to protect your device from scratching
- Holder width ranging between 1 3/4" (44,5 mm) and 2 1/2" (63,5 mm)
- Package contents: mGrip, 2 pair of holder grips and user

MCUP ctn qty. 10 EDP-No. 28342 new

Adjustable car cup holder mount for iPhone® 3G/S and iPod® Touch 2G/3G

- Adjustable base for a perfect fit in most cars' cup holders
- Flexible neck and 360-degree rotatable holder for the best viewing angle
- 6 selectable holder positions to perfectly fit your iPhone®, iPod® and mobile phone
- Fits iPhone® and iPod®, also while in a protection case
- Soft holder grips and back to protect your device from scratching
- Holder width ranging between 1 3/4" (44,5 mm) and 2 1/2" (63,5 mm)
- Package contents: mCup, 2 pair of holder grips and user guide

Connections & adapters for Apple® devices like MacBook®, MacBook Pro®, iMac®

CC A 20 F4 2.0 m ctn qty. 5 EDP-No. 45428 new

IEEE 1394b connection cable, white
9 pin IEEE 1394b plug <-> 4 pin IEEE 1394a plug

- Connecting cable from 9 pin IEEE 1394b (FireWire 800) standard to 4 pin IEEE 1394a (FireWire 400)
- High quality shielding
- Digital AV connection cable for DV camcorders, video recorders, etc.
- Data rate 400 Mbit/s

CC A 20 F5 2.0 m ctn qty. 5 EDP-No. 45429 new

IEEE 1394b connection cable, white
9 pin IEEE 1394b plug <-> 6 pin IEEE 1394a plug

- Connecting cable from 9 pin IEEE 1394b (FireWire 800) standard to 6 pin IEEE 1394a (FireWire 400)
- High quality shielding
- Digital AV connection cable for DV camcorders, video recorders, etc.
- Data rate 400 Mbit/s

Apple Accessories

Connections & adapters for Apple® devices like MacBook®, MacBook Pro®, iMac®

new **CA A 5** ctn qty. 5 EDP-No. 45487

IEEE 1394 adapter (FireWire 800 / FireWire 400)
9 pin IEEE 1394b plug <-> 6 pin IEEE 1394a plug

- Adapter to connect IEEE 1394a (FireWire 400) devices to end devices which have IEEE 1394b (FireWire 800) interfaces.

With the aid of this adapter it is easy to connect peripherals with IEEE 1394a (FireWire 400) connections to new end devices with IEEE 1394b (FireWire 800) interfaces, e.g
- MacBook Pro®
- iMac®
- Mac Mini®
- Mac Pro®

by means of existing FireWire 400 cables.

new **CA M10** 0.1 m ctn qty. 5 EDP-No. 45496

Mini Display Port / VGA adapter, white
Mini DP plug - VGA socket

- Short adapter to connect Mini DisplayPort sockets to existing VGA connections
- High quality shielding

With the aid of this adapter it is easy to connect peripherals to end devices with Mini DisplayPort interfaces, e.g.
- MacBook®
- MacBook Pro®
- MacBook Air®

via VGA connectors.

new **CA M7** 0.1 m ctn qty. 5 EDP-No. 45497

Mini Display Port / DVI adapter, white
Mini DP plug - DVI socket

- Short adapter to connect Mini DisplayPort sockets to existing DVI connections
- High quality shielding

With the aid of this adapter it is easy to connect peripherals to end devices with Mini DisplayPort interfaces, e.g.
- MacBook®
- MacBook Pro®
- MacBook Air®

via DVI connectors.

new **CA M11** 0.1 m ctn qty. 5 EDP-No. 45495

Mini Display Port / HDMI® adapter, white
Mini DP plug - HDMI® socket

- Short adapter to connect Mini DisplayPort sockets to existing HDMI® connections
- High quality shielding

With the aid of this adapter it is easy to connect peripherals to end devices with Mini DisplayPort interfaces, e.g.
- MacBook®
- MacBook Pro®
- MacBook Air®

via HDMI® connectors.

Connections & adapters for Apple® devices like MacBook®, MacBook Pro®, iMac®

CA M8 0.1 m ctn qty. 5 EDP-No. 45494 new

Mini DVI / VGA adapter, white
Mini DVI plug - 15 pin HD VGA socket

- Short adapter to connect Mini DVI sockets to existing VGA connections
- High quality shielding

With the aid of this adapter it is easy to connect peripherals to end devices with Mini DVI interfaces, e.g.
- MacBook®
- iMac® (Intel Core Duo)
- 12" PowerBook G4®

via VGA connectors.

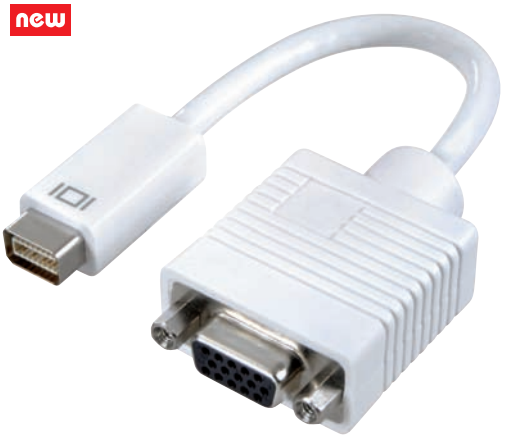

CA M9 0.1 m ctn qty. 5 EDP-No. 45498 new

Mini DVI / DVI adapter, white
Mini DVI plug - DVI socket

- Short adapter to connect Mini DVI sockets to existing DVI connections
- High quality shielding

With the aid of this adapter it is easy to connect peripherals to end devices with Mini DVI interfaces, e.g.
- MacBook®
- iMac® (Intel Core Duo)
- 12" PowerBook G4®

via DVI connectors.

CC U 18 S 1.8 m ctn qty. 5 EDP-No. 45280

USB 2.0 certified connection cable set
USB type A plug <-> USB B plug / USB A socket / USB mini B plug

- For connecting the PC / laptop to periphery devices, with USB B connection / USB mini B connection or for extension existing cables
- Certified in line with the USB 2.0 standard
- High speed data transfer rate of up to 480 Mbs
- Set contains:
  - 1x USB 2.0 certified connection cable USB A plug <-> USB B plug
  - 1x adapter USB B socket <-> USB A socket
  - 1x adapter USB B socket <-> USB mini B plug